


Approvals: 

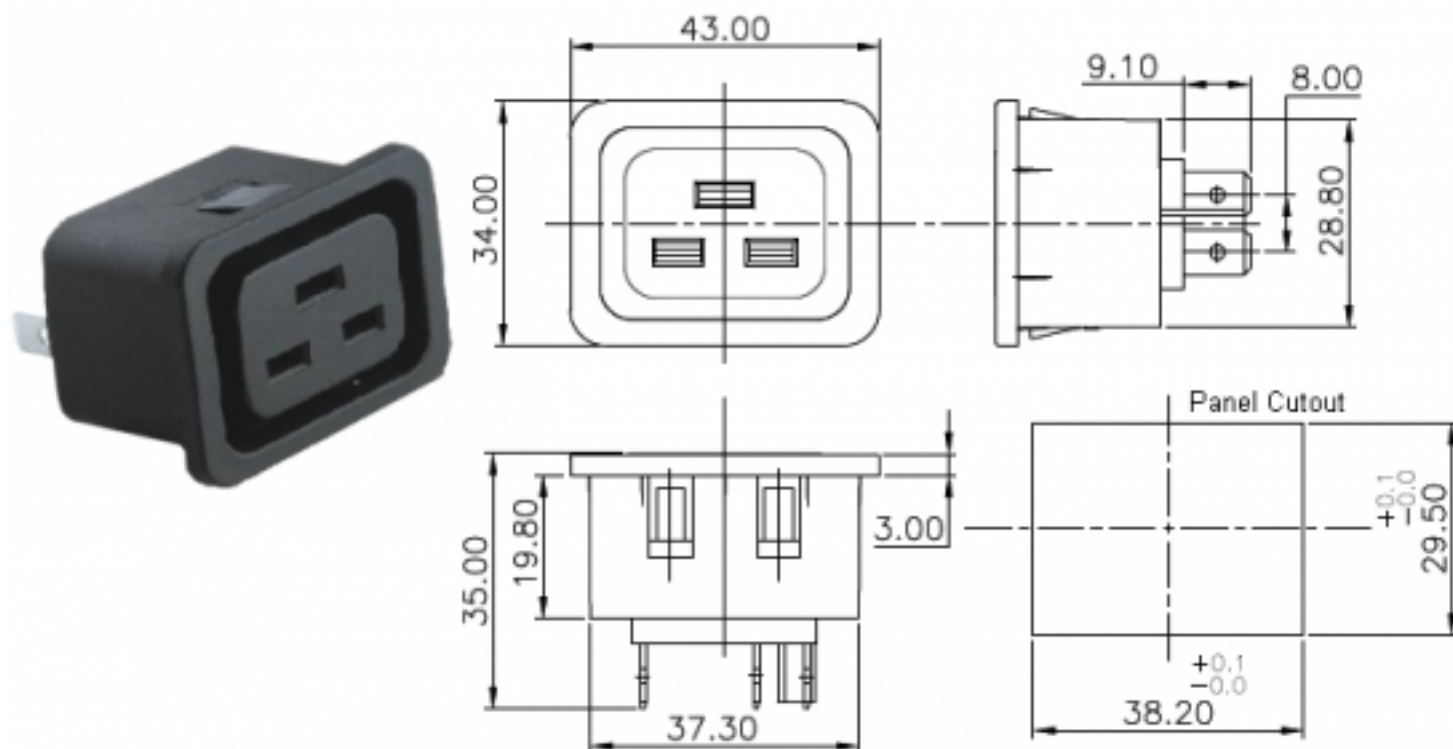

Snap mounting IEC outlet

Specifications

V / A Rating:	16 Amps (VDE), 20 Amps (UL,C-US) 250 VAC
Panel Thickness:	Standard 1.5, Other - On request
Reference Standards:	IEC - 60320 - 1
Material (Contacts - Terminal):	Copper Alloy, Tin Plating
Material (Body, Cable Lock):	Nylon-6, GF20% V2
Permisibbble Temp. (For Soldering):	270 deg.C for 5 Sec. max
Permisibbble Temp. (With / Without Load):	0 to 70 deg.C
Terminals:	Solder type or fast-on 6.3 X 0.8
Mounting:	Panel, snap-in type
H.V. Breakdown Test (for 1 Minute):	2 KV AC
Insulation Resistance @ 500 VDC:	1000 Mohms Min.
Contact Resistance (Initial):	10 mohms Max.

Elcom International Pvt. Ltd.


20 Prabhadevi Ind. Estate, 408 Veer Savarkar Marg, Prabhadevi, Mumbai - 400 025, India

Tel: +91 22 66114444 / +91 22 24308861, Fax: +91 22 66114422

Email: sales@elcom-in.com, elcom.mail@elcom-in.com

www.elcom-international.com

Approvals:   

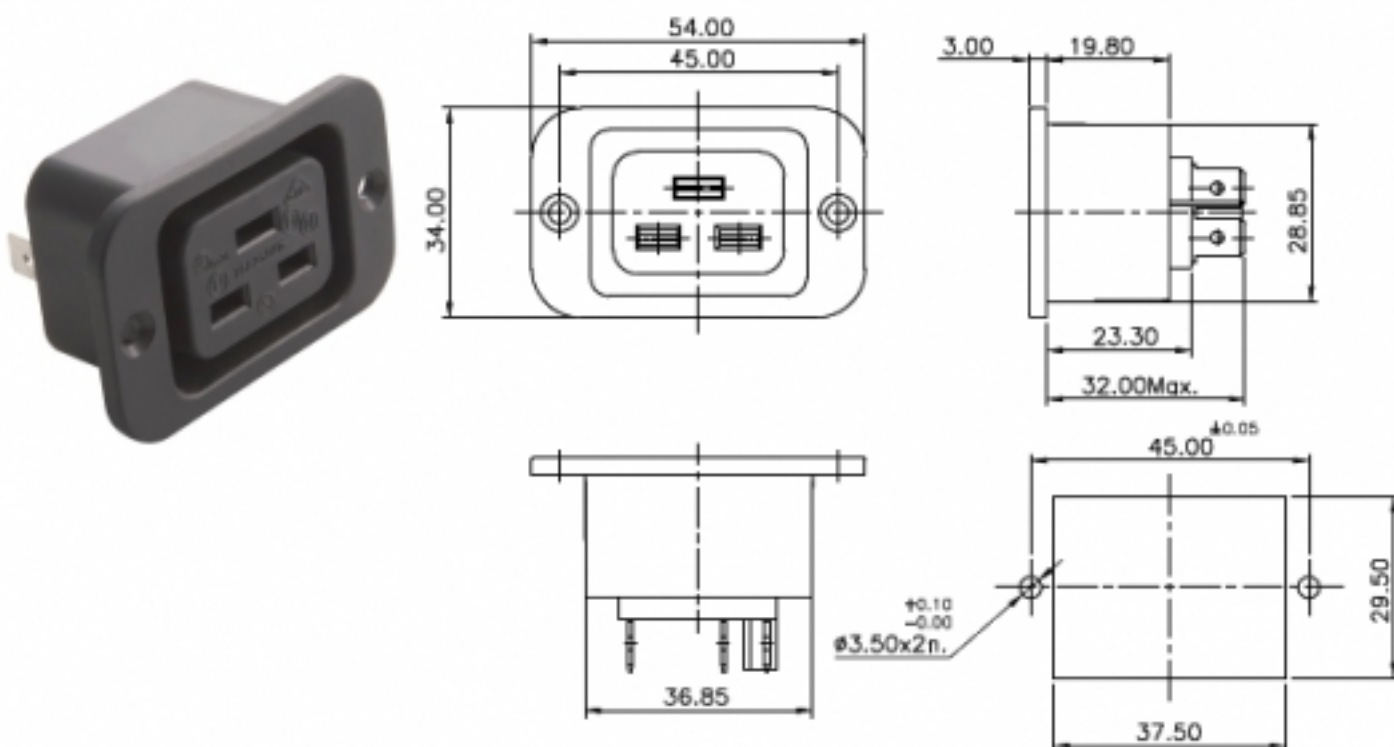

Screw mounting IEC outlet

Specifications

V / A Rating:	16 Amps (VDE), 20 Amps (UL,C-US) 250 VAC
Panel Thickness:	NA
Reference Standards:	IEC - 60320 - 1
Material (Contacts - Terminal):	Copper Alloy, Tin Plating
Material (Body, Cable Lock):	Nylon-6, GF20% V-2
Permissible Temp. (For Soldering):	270 deg.C for 5 Sec. max
Permissible Temp. (With / Without Load):	0 to 70 deg.C
Terminals:	Solder type or fast-on 6.3 X 0.8
Mounting:	Panel, Screw Type
H.V. Breakdown Test (for 1 Minute):	2 KV AC
Insulation Resistance @ 500 VDC:	1000 Mohms Min.
Contact Resistance (Initial):	10 mohms Max.


Elcom International Pvt. Ltd.

20 Prabhadevi Ind. Estate, 408 Veer Savarkar Marg, Prabhadevi, Mumbai - 400 025, India

Tel: +91 22 66114444 / +91 22 24308861, Fax: +91 22 66114422

Email: sales@elcom-in.com, elcom.mail@elcom-in.com

www.elcom-international.com

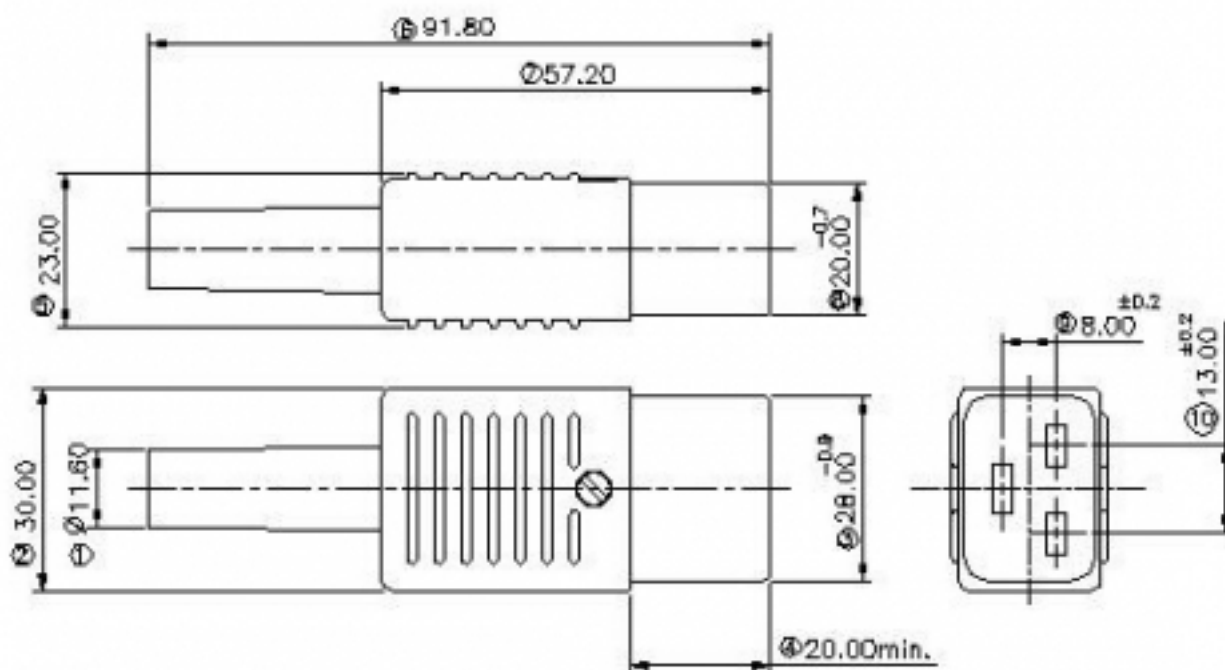

IEC Rewirable connector

Specifications

V / A Rating:	16 Amps, 250 VAC
Panel Thickness:	NA
Reference Standards:	IEC - 60320 - 1
Material (Contacts - Terminal):	Copper Alloy, Nickel Plated
Material (Body, Cable Lock):	Nylon
Permissible Temp. (For Soldering):	NA
Permissible Temp. (With / Without Load):	-20 deg.C to + 85 deg.C
Terminals:	Screw Type
Mounting:	Rewirable
H.V. Breakdown Test (for 1 Minute):	2 KV AC

Contd..

Elcom International Pvt. Ltd.

20 Prabhadevi Ind. Estate, 408 Veer Savarkar Marg, Prabhadevi, Mumbai - 400 025, India

Tel: +91 22 66114444 / +91 22 24308861, Fax: +91 22 66114422

Email: sales@elcom-in.com, elcom.mail@elcom-in.com

www.elcom-international.com

Specifications - Contd..

Insulation Resistance @ 500 VDC:	100 Mohms Min.
Contact Resistance (Initial):	10 mohms Max.

Elcom International Pvt. Ltd.

20 Prabhadevi Ind. Estate, 408 Veer Savarkar Marg, Prabhadevi, Mumbai - 400 025, India
Tel: +91 22 66114444 / +91 22 24308861, Fax: +91 22 66114422
Email: sales@elcom-in.com, elcom.mail@elcom-in.com
www.elcom-international.com