

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Polycarbonate, UL-94V-0 rated

Contacts: Copper, Tin plated

ELECTRICAL SPECIFICATIONS:

Current rating: 10 A

Voltage rating: 250 VAC



Insulation resistance: 100 Mohm min. at 500 VDC

Dielectric withstanding voltage: 2000 VAC for one minute

ORDERING CODE:42R34-1 $\frac{1}{2}$ $\frac{2}{2}$ **1) COLOR**

1 = BLACK

2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C

2+GROUND



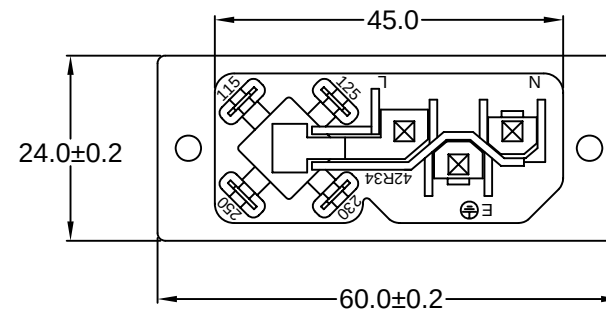
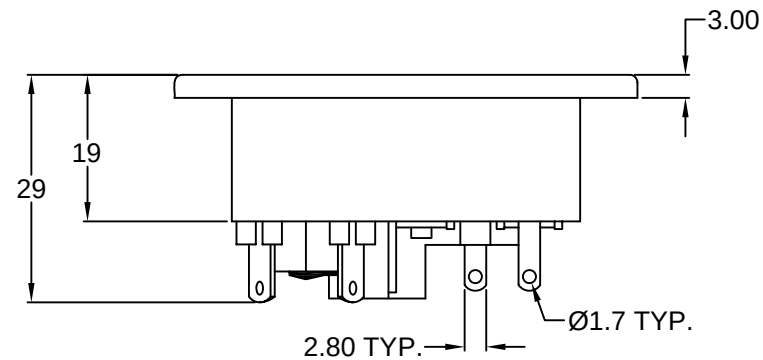
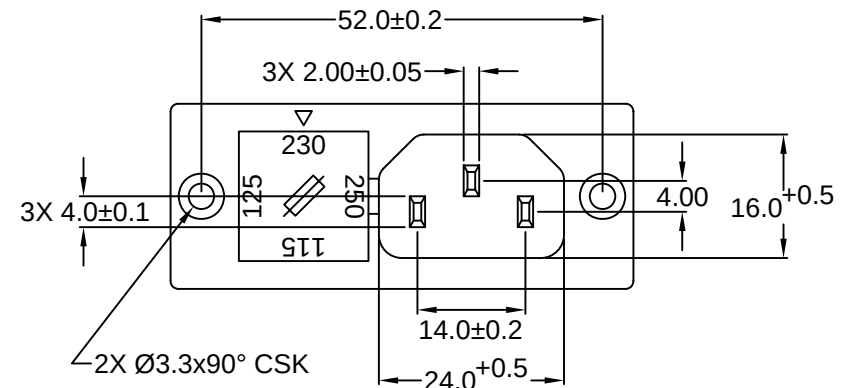

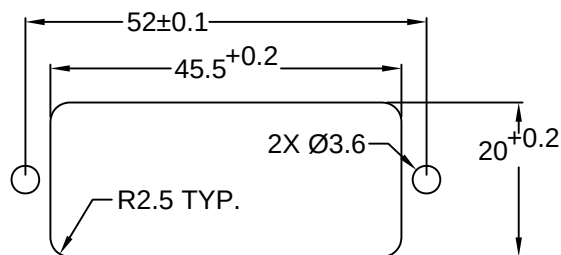
2 = 10A 250V 120°C

2+GROUND



4 = 10A 250V 70°C

2 POLE

RoHS
COMPLIANTRECOMMENDED
PANEL CUTOUTTOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION
FUSE HOLDER; SOLDER TERMINALS; SCREW

DRAWN BY	GQ	DATE:	09/13/01
CHECK BY	TD	DATE:	09/18/01
APPR BY	PB	DATE:	09/18/01

PART #: **42R34-1X2X**SHEET
1 of 1SIZE: A
SCALE: NTSALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV:

REVISIONS

CHANGE

DATE

REV

CHNG

CHECK

APPR