


Terminals

L1001/1 Terminal

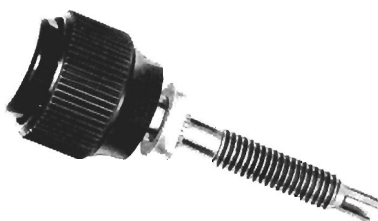

This terminal incorporates a non-rotating centre disc in the head for lettering. The rotating collar is captive and the clamping gap is free from thread.

When used with Panel fittings 01 this terminal is panel sealed.

Current rating: ___ 15 A

Temperature range: ___ -25 °C to + 70 °C

Materials: ___ Head, phenolic resin
Disc, tenite butyrate
Stem, brass, nickel-plated

Colours head: ___ Black
disc: Black, red


Ordering reference:

L1001/1/Colour

Fixing Kit 3

Panel fittings (see below and opposite)

(Terminals and fittings are supplied unassembled and must be ordered as individual items.)

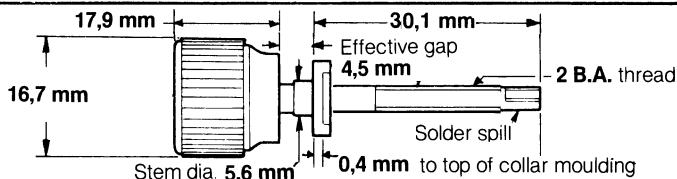

Fixing kit 3

Comprises: ___ Metal washer
Non-rotating washer
2 locknuts (2 BA)

B panel fittings

Comprises: ___ Phenolic resin
moulding, SRBP
insulating washer


Breakdown voltage: ___ 3 kVd.c.

Insulation resistance: ___ $\geq 10^3$ megohms

Temperature range: ___ -40 °C to + 85 °C
(ambient)

Fixing torque: ___ 1,41 Nm

Colour: ___ Black





CA panel fittings

Comprises: _____ Phenolic resin
moulding. 2 SRBP
insulating washers

**Breakdown
voltage:** _____ 3 kVd.c.


**Insulation
resistance:** _____ $\geq 10^3$ megohms

Temperature

range: _____ -40°C to $+85^\circ\text{C}$
(ambient)

Fixing torque: _____ 1,41 Nm

Colour: _____ Black

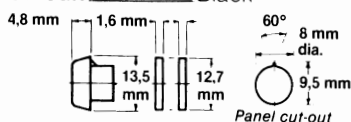

01 panel fittings

Comprises: _____ 2 phenolic resin
moulding. 2 sealing
rings. Metal washer
2 locknuts

**Breakdown
voltage:** _____ >2 kVd.c.


Insulation resistance: _____

Panel thickness: 3,4 mm maximum

Fixing torque: _____ 0,565 Nm

Clamping torque: 1,13 Nm

Colour: _____ Black



2B panel fittings

Comprises: _____ 2 phenolic resin
mouldings

**Breakdown
voltage:** _____ 7 kVd.c.

**Insulation
resistance:** _____ $\geq 10^3$ megohms


Panel thickness: 0,9 mm to 1,6 mm

Temperature

range: _____ -40°C to $+85^\circ\text{C}$
(ambient)

Fixing torque: _____ 1,41 Nm

Colour: _____ Black



2L panel fittings

Comprises: _____ 2 polyethylene-
polypropylene
co-polymer mouldings

**Breakdown
voltage:** _____ 8 kVd.c.

**Insulation
resistance:** _____ $\geq 10^3$ megohms


Panel thickness: 0,9 mm to 4,8 mm

Temperature

range: _____ -40°C to $+85^\circ\text{C}$
(ambient)

Fixing torque: _____ 1,41 Nm

Colour: _____ Black



31A panel fittings

Comprises: _____ 2 polyethylene-
polypropylene
co-polymer mouldings

**Breakdown
voltage:** _____ 8 kVd.c.

**Insulation
resistance:** _____ $\geq 10^6$ megohms

Panel thickness: 0,9 mm to 3,2 mm

Temperature

range: _____ -40°C to $+100^\circ\text{C}$
(ambient)

Fixing torque: _____ 1,41 Nm

Colour: _____ Black

