

Terminals

L1005/1

Terminal

A heavy current terminal incorporating a non-rotating head for lettering. The rotating collar is captive and the clamping gap is free from threads.

Current rating: ___ 100 A


Temperature

range: ___ -25 °C to + 85 °C
(ambient)

Materials: ___ Head, phenolic resin
Disc, tenite butyrate
Stem, brass, nickel
plated

Colours: Head, black
Disc, red or black

Weight: 59,9 g average

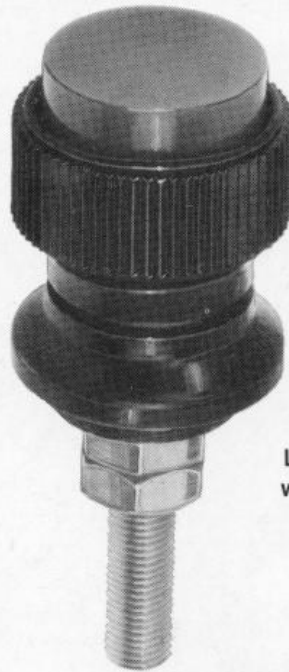

L1005/1
with H Fitting.

H panel fittings

Comprises: Phenolic resin
moulding. Micanite
insulating washer.
Metal washer.
2 locknuts

Breakdown
voltage: ___ >4 kVd.c.

Temperature
range: ___ -25 °C to + 85 °C

Insulation
resistance: ___ $\geq 10^3$ megohms

Panel thickness: 1,6 mm to 23,8 mm

Fixing torque: ___ 2,8 Nm to 3,5 Nm

Colour: ___ Black

Ordering reference:

L1005/1/Colour
H panel fittings

(Terminals and fittings are supplied unassembled and must be ordered as individual items.)

