




L1301/1 PATTERN 1 TERMINAL, PANEL SEALED



Qualification approved for Service's use and panel sealed. Slotted construction to effect quick connection. The head is captive.

CURRENT RATING:	10A
TEMPERATURE RANGE:	-25° C to +85° C
MATERIALS:	Head, phenolic resin Stem, brass, nickel plated, solder spill tin dipped
COLOUR:	Black
WEIGHT:	12.0g average
LEAKAGE, WHEN USED WITH 01 PANEL FITTING:	1 cc/h @ 20 lbf / in 138 kPa
HUMIDITY:	H1
WIRE SIZE (MAXIMUM):	1.5mm diameter

ORDERING REFERENCE: L1301/1

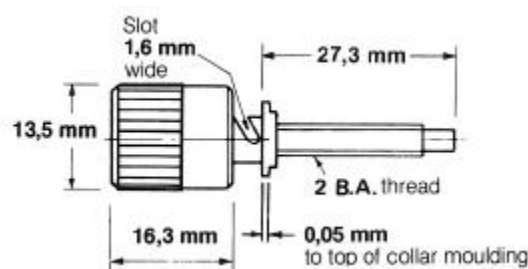

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
 Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com http://www.blpcomp.com

A subsidiary of Dialight plc