


L1301/1

Pattern 1 terminal,
panel sealed

Specification: DEF-5335

Qualification approved for Service's use and panel sealed. Slotted construction to effect quick connection. The head is captive.



L1301/1
with 01 Fittings.

Current rating: 10 A

Temperature

range: -25 °C to + 85 °C

Materials: Head, phenolic resin
Stem, brass, nickel
plated, solder spill tin-
dipped

Colour: Black

Weight: 12,0 g average

Leakage, when

used with 01

panel fitting: ≤ 1 cc/h @ 20 lbf/in
138 kPa

Humidity: H1

Wire size


(maximum): 1,5 mm diameter

Ordering reference:

L1301/1

01 panel fittings

(Terminals and Panel fittings are supplied unassembled and must be ordered as individual items.)

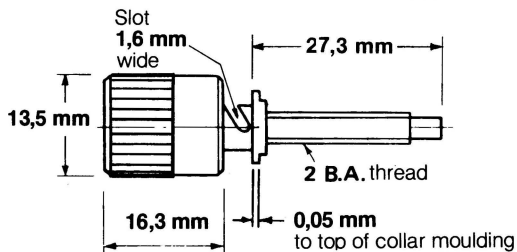

01 panel fittings

Comprises: 2 phenolic resin
mouldings. 2 sealing
rings. Metal washer.
2 lock nuts

Breakdown

voltage: >2 kVd.c.

Insulation

resistance: ≥ 500 megohms

Temperature



range: -55 °C to + 85 °C
(ambient)

Panel thickness: 3,4 mm maximum

Fixing torque: 0,565 Nm

Clamping torque: 1,13 Nm

Colour: Black



Panel cut-out