




L1409/Ni 12 Way



Current rating:	_____	15 A (Temperature rise of 20 °C above ambient)
Temperature range:	_____	-55 °C to + 70 °C (ambient)
Breakdown voltage:	_____	6 kV (4.5 kV to chassis)
		Important Note: insulated fixing screws must be used to mount this product.
Insulation resistance:	_____	$\geq 10^3$ megohms
Creepage distance:	_____	Between terminals, 8,4 mm
(Chassis thickness 1,6 mm)		Terminals to chassis, 4,3 mm
Humidity:	_____	Class H6 (DEF—5011)
Wire size (maximum):	_____	1/1,78 mm to 30/0,25 mm
Weight (average):	_____	37 g
Ordering reference:	_____	L1409/Ni

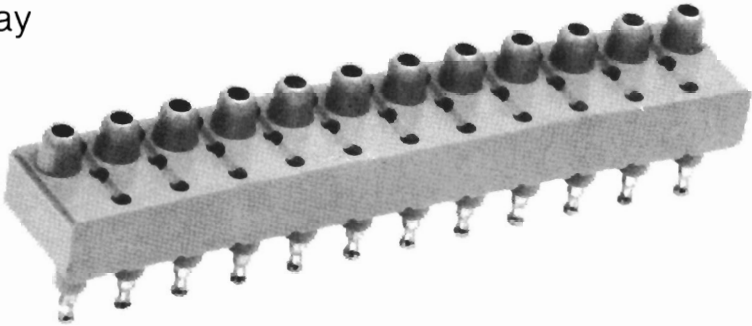