




L1409/Ni 12 Way



Current rating: _____	15 A (Temperature rise of 20 °C above ambient)
Temperature range: _____	-55 °C to + 70 °C (ambient)
Breakdown voltage: _____	6 kV (4.5 kV to chassis)
	Important Note: Insulated fixing screws must be used to mount this product.
Insulation resistance: _____	≥ 10 ³ megohms
Creepage distance: _____	Between terminals, 8,4 mm
(Chassis thickness 1,6 mm)	Terminals to chassis, 4,3 mm
Humidity: _____	Class H6 (DEF—5011)
Wire size (maximum): _____	1/1,78 mm to 30/0,25 mm
Weight (average): _____	37 g
Ordering reference: _____	L1409/Ni

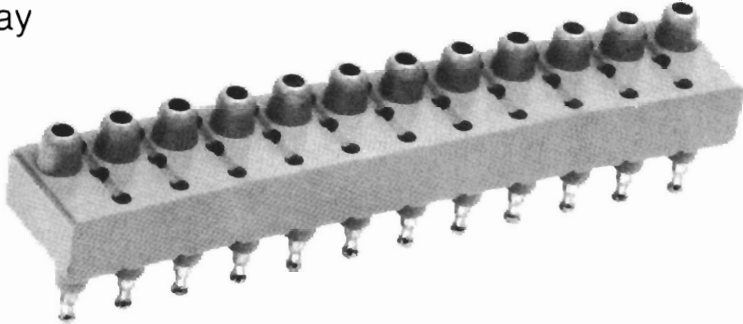