


Flexible terminal blocks

L1469/Ni 12 Way



Current rating:	20 A (Temperature rise <20 °C above ambient)
Temperature range:	-55 °C to + 70 °C (ambient)
Breakdown voltage (d.c.):	>10 kV (6 kV to chassis)
Insulation resistance:	≥10 ³ megohms
Creepage distance:	Between terminals, 18 mm
(Chassis thickness 1,6 mm)	Terminals to chassis, 3,6 mm
Humidity:	Class H6 (DEF—5011)
Wire size:	7/0,85 mm to 50/0,25 mm
Weight (average):	60 g
Ordering reference:	L1469/Ni

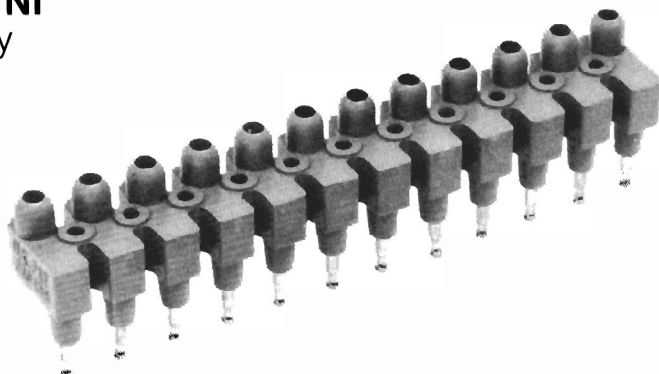