
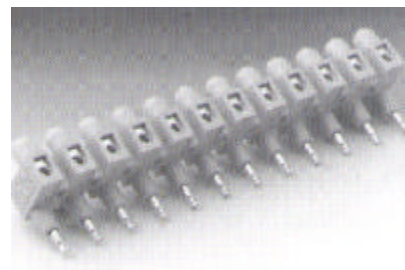


**L1469/Ni FLEXIBLE TERMINAL BLOCK**

- 12 way flexible terminal block
- 20A through chassis, one row screws

<b>CURRENT RATING:</b>	<b>20A (temperature rise &lt;20° C above ambient)</b>
<b>TEMPERATURE RANGE:</b>	<b>-55° C to +70° C (ambient)</b>
<b>BREAKDOWN VOLTAGE (d.c.):</b>	<b>&gt;8KV (6KV To chassis)</b>
<b>INSULATION RESISTANCE:</b>	<b>≥1000 megohms</b>
<b>CREEPAGE DISTANCE: CHASSIS THICKNESS</b>	<b>1.6mm</b>
<b>: BETWEEN TERMINALS</b>	<b>18mm</b>
<b>: TERMINALS TO CHASSIS</b>	<b>3.6mm</b>
<b>HUMIDITY:</b>	<b>Class H6 (DEF-5011)</b>
<b>WIRE SIZE (MAXIMUM):</b>	<b>7/0.85mm to 50/0.25mm</b>
<b>WEIGHT (AVERAGE):</b>	<b>60g</b>
<b>APPROVALS:</b>	<b>DEF-5011</b>

**ORDERING REFERENCE: L1469/Ni**

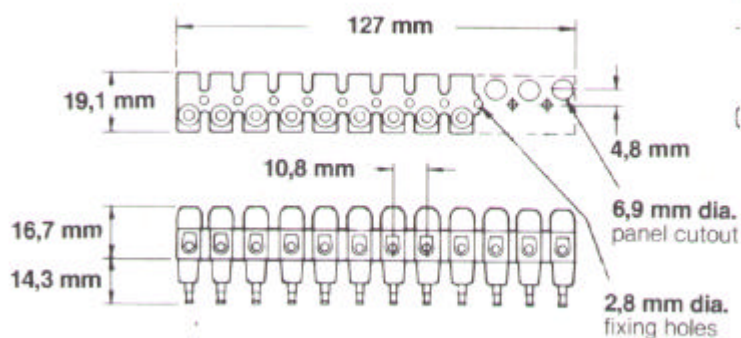

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

A subsidiary of Dialight plc