


**L1568/1 TERMINAL**

This terminal is slim-styled with a captive head containing a 4mm socket. It has a 2.4mm diameter cross-hole in the clamping gap which is free from threads.

<b>CURRENT RATING:</b>	<b>15A</b>
<b>TEMPERATURE RANGE:</b>	<b>-25°C to +70°C</b>
<b>MATERIALS:</b>	<b>Head, polypropylene Stem, brass, nickel-plated</b>
<b>COLOURS:</b>	<b>Black, red, green, grey</b>
<b>ORDERING REFERENCE:</b>	<b>L1568/1/Colour Fixing kit 2 Panel fittings (see separate spec sheet)</b>

**(Terminals, Fixing kit 2 and Panel fittings are supplied unassembled and must be ordered as individual units)**

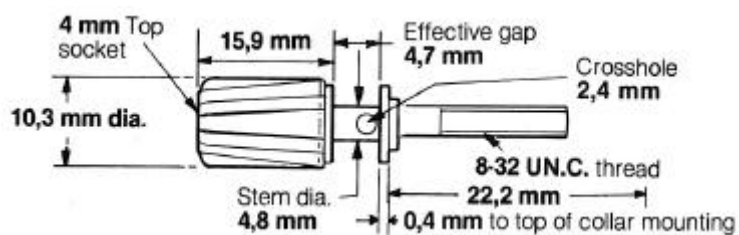

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England  
Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: [sales@blpcomp.com](mailto:sales@blpcomp.com) <http://www.blpcomp.com>

A subsidiary of Dialight plc