

L1568/1 TERMINAL PANEL FITTINGS


FIXING KIT 2
COMPRISES : _____ **Washer**
Solder Tag
2 Locknuts (No. 8-32 UNC)

B panel fittings

Comprises: _____ Phenolic resin moulding. SRBP insulating washer

Breakdown voltage: _____ 3 kVd.c.
Insulation resistance: _____ $\geq 10^3$ megohms
Temperature range: _____ -40 °C to +85 °C (ambient)


Fixing torque: _____ 1,41 Nm
Colour: _____ Black

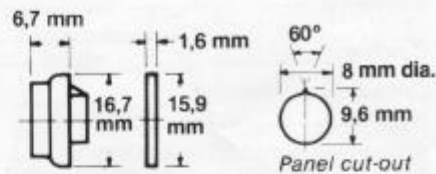

CA panel fittings

Comprises: _____ Phenolic resin moulding. 2 SRBP insulating washers


Breakdown voltage: _____ 3 kVd.c.
Insulation resistance: _____ $\geq 10^3$ megohms
Temperature range: _____ -40 °C to +85 °C (ambient)

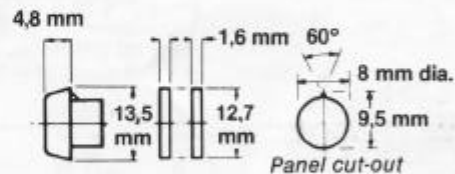

2B panel fittings

Comprises: _____ 2 phenolic resin mouldings
Breakdown voltage: _____ 7 kVd.c.
Insulation resistance: _____ $\geq 10^3$ megohms
Panel thickness: 0,9 mm to 1,6 mm
Temperature range: _____ -40 °C to +85 °C

Fixing torque: _____ 1,41 Nm
Colour: _____ Black

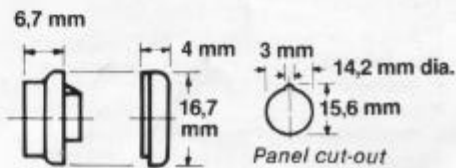

Dialight BLP reserve the right to change without prior notice the information contained within this leaflet

Dialight BLP Ltd., Exning Road, Newmarket, Suffolk, CB8 0AX, England
 Tel: +44 (0)1638 665161 Fax: +44 (0)1638 660718 email: sales@blpcomp.com <http://www.blpcomp.com>

A subsidiary of Dialight plc