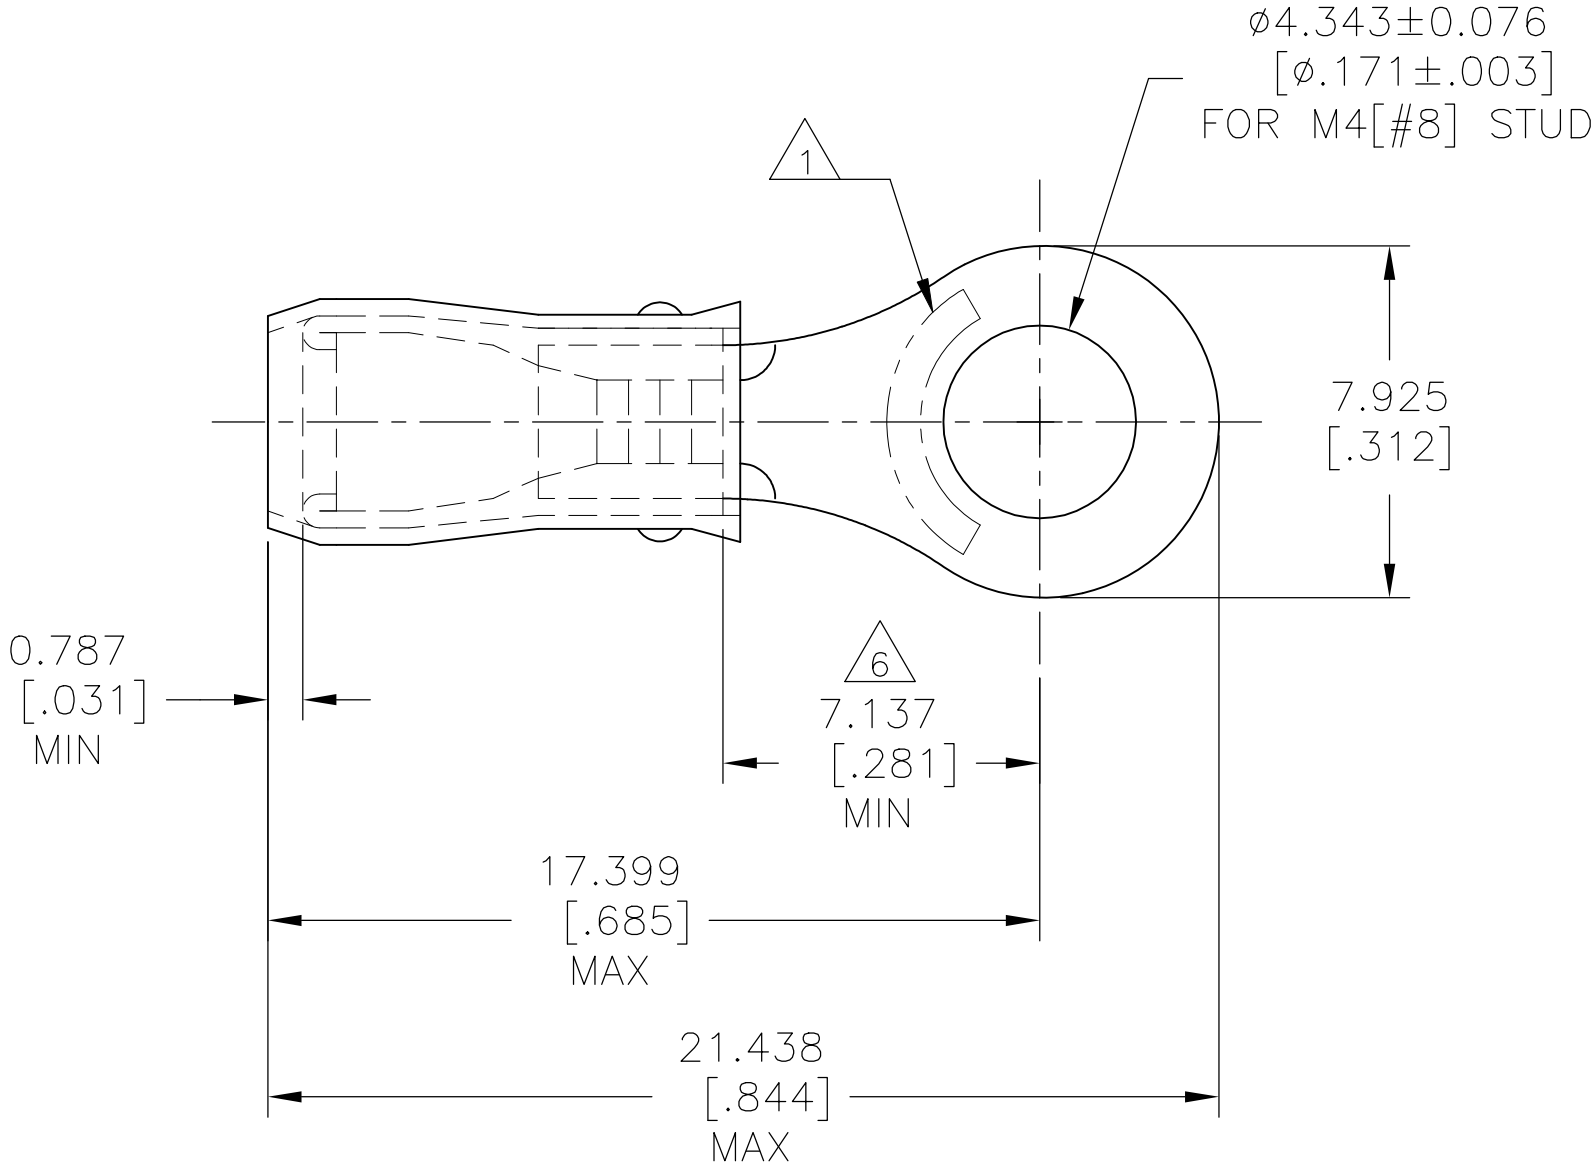


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT - By -	ALL RIGHTS RESERVED.




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	U1	REVISED PER ECO-11-004917	11MAR11	RK	HMR
	U2	REVISED PER ECO-17-008114	01JUN2018	RS	DR

AMP WIRE RANGE	 E13288 Listed	 LR7189 Certified
22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED	22-16 AWG SOLID OR STRANDED



- 1 STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18
IN ACCORDANCE WITH MILITARY SPEC
SAE AS7928 COMMERCIAL WIRE RANGE IS
22-16
- 2 WIRE INSULATION DIA:
2.032-3.175[.080-.125]
- 3 TONGUE MATERIAL THK:
0.787±0.051[.031±.002]
- 4 TIN PL 0.00254[.000100] MIN EXT THK
PER ASTM B545
- 5 NOTE DELETED
- 6 APPLIES FROM EDGE OF METAL WIRE
BARREL TO CENTER OF STUD

1000	LOOSE PIECE	4 31888
QUANTITY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM02/11/93		 TE Connectivity Ltd.							
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	CHK RE HERSEY4/28/93	NAME TERMINAL, RING TONGUE, PIDG™, WIRE SIZE, 22-16 AWG							
			APVD ML ELLIS4/28/93											
FOR APPLICATION	TOOLING ASSISTANCE CENTER	VOLTAGE RATING: 300 V MAX			UL 486A-B	PRODUCT SPEC	SIZE			CAGE CODE	DRAWING NO	RESTRICTED TO		
TOOLING INFORMATION	1-800-722-1111					114-2157	A3	00779	C-31888	—				
FOR ORDER ENTRY	1-800-526-5142	WIRE CROSS SECTIONAL AREA RANGE, 0.26-1.65mm²[509-3,260] CIR MILS SOLID OR STRANDED	MATERIAL COPPER PER ASTM B-152 SLEEVE, RED VINYL		WEIGHT	CUSTOMER DRAWING			SCALE	6:1	SHEET	1 OF 1	REV	U2