

SECTION 4

UN- & PRE-INSULATED TERMINALS


TYPES INCLUDE: • **UTILUGS** – non insulated • **PRE-INSULATED UTILUGS** – Complete with PVC insulated barrel
• **SUPERGRIP UTILUGS** – Complete with additional copper over the barrel. For use in high vibration conditions.

RING TERMINALS	STYLE	STUD SIZE	PAGE
	Uninsulated Utilug	M1.6-M20	22
	Preinsulated Utilug	M1.6-M18	33
	Preinsulated Supergrip	M1.6-M18	34
	High Temp Utilug	M4-M6	36
	Heavy Duty Preinsulated	M5-M6	37
FORK TERMINALS	STYLE	STUD SIZE	PAGE
	Uninsulated Utilug	M3-M6	35
	Preinsulated Utilug	M3-M6	36
	Preinsulated Supergrip	M3-M6	35
PIN CONNECTORS	STYLE	TERMINAL SIZE	PAGE
	Uninsulated Crimp Pin Connector	1-5	38
	Preinsulated Pin Connector	1-3	38
	Preinsulated Supergrip Pin Connector	0-3	38
BOOTLACE FERRULES	STYLE	WIRE SIZE	PAGE
	Bootlace Ferrule	0.5-50.0	37
	Dual Bootlace Ferrule		37
LINK CONNECTORS	STYLE	TERMINAL SIZE	PAGE
	Preinsulated Crimp Link Cable Connector	1-3	39
	Heavy Duty Preinsulated Crimp Link Cable Conn.	4.7-8.3	40
	Closed End Preinsulated Crimp Link Cable Conn.	2.08-4.6	39
QC CONNECTORS	STYLE	WIRE SIZE	PAGE
	2.8mm Receptacle	0.5-1.5	40
	4.8mm Receptacle	0.5-2.5	40
	6.3mm Receptacle	0.5-6.0	41
	6.3mm Tabs	0.5-6.0	41
	6.3mm Adaptor Piggy Back	0.5-6.0	41
	9.3mm Receptacle	2.5-6.0	41
LIP BLADE	STYLE	WIRE SIZE	PAGE
	Lip Blade Terminal	0.5-6.0	42
BULLET CONNECTORS	STYLE	WIRE SIZE	PAGE
	Preinsulated Terminal	0.5-2.5	42
	Preinsulated Receptacle	0.5-2.5	42
BRASS CONNECTORS	STYLE		PAGE
	TK22 Terminal Kit		43

UNINSULATED RING TERMINAL UTILUG



- Electro tinned to minimise corrosion
- Serrated barrel provides secure mechanical and electrical connection
- Also available in continuous strip form
- Suitable for small flexible cables




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	B	DIMENSIONS mm			TOOL NO.
							C	E	F	
UR1.5M1.6	H3110	NO.1 22-16AWG	0.5	M1.6	12.5	5.5	0.7	2.5	4.8	00 76A 16B 18 63-1
UR1.5M3S	H3111			M3	12.5	5.5	0.7	3.7	4.8	
UR1.5M3M	H3116			M3	14.4	6.6	0.7	3.7	4.8	
UR1.5M3L	H3112			M3	15.8	8.0	0.7	3.7	4.8	
UR1.5M4S	H3113			M4	14.4	6.6	0.7	4.3	4.8	
UR1.5M4L	H3114			M4	15.8	8.0	0.7	4.3	4.8	
UR1.5M5S	H3115		1.5	M5	15.8	8.0	0.7	5.3	4.8	
UR1.5M5L	H3117			M5	21.8	11.6	0.7	5.3	4.8	
UR1.5M6	H3118			M6	21.8	11.6	0.7	6.4	4.8	
UR1.5M8	H3119			M8	21.8	11.6	0.7	8.4	4.8	
UR1.5M10	H3140			M10	25.5	13.6	0.7	10.5	4.8	
UR2.5M3S	H3120	NO.2 16-14AWG	1.5	M3	14.4	6.6	0.8	3.7	4.8	00 76A 16B 18 63-1
UR2.5M3L	H3121			M3	16.8	8.5	0.8	3.7	4.8	
UR2.5M4S	H3122			M4	14.4	6.6	0.8	4.3	4.8	
UR2.5M4L	H3123			M4	16.8	8.5	0.8	4.3	4.8	
UR2.5M5S	H3125		2.5	M5	16.8	8.5	0.8	5.3	4.8	
UR2.5M5L	H3126			M5	16.8	9.5	0.8	5.3	4.8	
UR2.5M6	H3127			M6	21.8	12.0	0.8	6.4	4.8	
UR2.5M8	H3128			M8	21.8	12.0	0.8	8.4	4.8	
UR2.5M10	H3129			M10	25.5	13.6	0.8	10.5	4.8	
UR6M3	H3132	NO.3 12-10AWG	2.5	M3	15.7	7.2	1.0	3.7	6.0	00 76A 16B 18 63-1 124
UR6M4S	H3130			M4	15.7	7.2	1.0	4.3	6.0	
UR6M4L	H3131			M4	19.6	9.5	1.0	4.3	6.0	
UR6M5	H3133			M5	19.6	9.5	1.0	5.3	6.0	
UR6M6	H3134			M6	22.5	12.0	1.0	6.4	6.0	
UR6M8	H3137		6.0	M8	27.0	15.0	1.0	8.4	6.0	
UR6M10	H3138			M10	27.0	15.0	1.0	10.5	6.0	
UR6M12	H3139			M12	31.6	19.2	1.0	13.0	6.0	
UR6M16	H3161			M16	47.6	31.8	0.9	31.8	6.6	
UR6M18	H3162			M18	47.6	31.8	0.9	31.8	6.6	
UR8.5M6	H3183	NO.4 10-8AWG	6.0	M6	23.8	12.0	1.2	6.4	8.5	00 18 124
UR8.5M10	H3185A		TO	M10	29.8	15.0	1.2	10.5	8.5	
UR8.5M16	H3187A		8.5	M16	50.0	31.6	1.2	15.0	8.5	
UR20M12	H1851B	5AWG	20.0	M12	54.0	31.8	1.8	15.0	15.9	20
UR20M16	H1851	5AWG	20.0	M16	54.0	31.8	1.8	15.0	15.9	



PRE-INSULATED RING TERMINAL UTILUG

- Copper electro tinned to minimise corrosion
- PVC insulation for insulation support





DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	B	C	E	F	MAX. INSUL. DIA. mm	TOOL NO.
RRM1.6	H4110	NO.1 RED 22-16AWG	0.5 TO 1.5	M1.6	17.5	5.5	0.7	3.2	10.0	3.5	76A 11C 11B 63-4B 102 120
RRM3S	H4111			M3	17.5	5.5	0.7	3.7	10.0		
RRM3M	H4116			M3	19.4	6.6	0.7	3.7	10.0		
RRM3L	H4112			M3	20.8	8.0	0.7	3.7	10.0		
RRM4S	H4113			M4	19.4	6.6	0.7	4.3	10.0		
RRM4L	H4114			M4	20.8	8.0	0.7	4.3	10.0		
RRM5S	H4115			M5	20.8	8.0	0.7	5.3	10.0		
RRM5L	H4117			M5	26.8	11.6	0.7	5.3	10.0		
RRM6	H4118			M6	26.8	11.6	0.7	6.4	10.0		
RRM8	H4119			M8	26.8	11.6	0.7	8.4	10.0		
RRM10	H4140			M10	30.5	13.6	0.7	10.5	10.0		
BRM3S	H4120	NO.2 BLUE 16-14AWG	1.5 TO 2.5	M3	19.4	6.6	0.8	3.7	10.0	4.3	76A 12C 12B 63-4U 102 120
BRM3L	H4121			M3	21.8	8.5	0.8	3.7	10.0		
BRM4M	H4124			M4	17.8	6.6	0.8	3.7	10.0		
BRM4S	H4122			M4	19.4	6.6	0.8	4.3	10.0		
BRM4L	H4123			M4	21.8	8.5	0.8	4.3	10.0		
BRM5S	H4125			M5	21.8	8.5	0.8	5.3	10.0		
BRM5L	H4126			M5	21.8	9.5	0.8	5.3	10.0		
BRM6	H4127			M6	26.8	12.0	0.8	6.4	10.0		
BRM8	H4128			M8	26.8	12.0	0.8	8.4	10.0		
BRM10	H4129			M10	30.5	13.6	0.8	10.5	10.0		
YRM3	H4132	NO.3 YELLOW 12-10AWG	2.5 TO 6.0	M3	22.7	7.2	1.0	3.7	10.0	6.1	76A 13B 63-5U 102 120
YRM4S	H4130			M4	22.7	7.2	1.0	4.3	10.0		
YRM4L	H4131			M4	26.6	9.5	1.0	4.3	10.0		
YRM5	H4133			M5	26.6	9.5	1.0	5.3	10.0		
YRM6	H4134			M6	29.5	12.0	1.0	6.4	10.0		
YRM8	H4137			M8	34.0	15.0	1.0	8.4	10.0		
YRM10	H4138			M10	34.0	15.0	1.0	10.5	10.0		
YRM12	H4139			M12	38.6	19.2	1.0	13.0	10.0		
YRM18	H4162			M18	54.8	31.8	0.9	31.8	13.5		

RING TERMINAL SUPERGRIP UTILUG



- Fitted with a copper ferrule and pre-insulated for secure insulation support
- Copper electro tinned to minimise corrosion
- Serrated barrel provides secure mechanical and electrical connection




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	DIMENSIONS mm				MAX. INSUL. DIA. mm	TOOL NO.
RRSGM1.6	H4210	NO.1 RED 22-16AWG	0.5 TO 1.5	M1.6	18.0	5.5	0.7	3.2	10.5	3.5	11C 11B 76B 63-4B 102 120
RRSGM3S	H4211			M3	18.0	5.5	0.7	3.7	10.5		
RRSGM3M	H4216			M3	19.9	6.6	0.7	3.7	10.5		
RRSGM3L	H4212			M3	21.3	8.0	0.7	3.7	10.5		
RRSGM4S	H4213			M4	19.9	6.6	0.7	4.3	10.5		
RRSGM4L	H4214			M4	21.3	8.0	0.7	4.3	10.5		
RRSGM5S	H4215			M5	21.3	8.0	0.7	5.3	10.5		
RRSGM5L	H4217			M5	27.3	11.6	0.7	5.3	10.5		
RRSGM6	H4218			M6	27.3	11.6	0.7	6.4	10.5		
RRSGM8	H4219			M8	27.3	11.6	0.7	8.4	10.5		
RRSGM10	H4240			M10	31.0	13.6	0.7	10.5	10.5		
BRSGM3S	H4220	NO.2 BLUE 16-14AWG	1.5 TO 2.5	M3	19.9	6.6	0.8	3.7	10.5	4.3	12C 12B 76B 63-4U 102 120
BRSGM3L	H4221			M3	22.3	8.5	0.8	3.7	10.5		
BRSGM4S	H4222			M4	19.9	6.6	0.8	4.3	10.5		
BRSGM4L	H4223			M4	22.3	8.5	0.8	4.3	10.5		
BRSGM5S	H4225			M5	22.3	8.5	0.8	5.3	10.5		
BRSGM5L	H4226			M5	22.3	9.5	0.8	5.3	10.5		
BRSGM6	H4227			M6	27.3	12.0	0.8	6.4	10.5		
BRSGM8	H4228			M8	27.3	12.0	0.8	8.4	10.5		
BRSGM10	H4229			M10	31.0	13.6	0.8	10.5	10.5		
YRSGM3	H4232	NO.3 YELLOW 12-10AWG	2.5 TO 6.0	M3	23.2	7.2	1.0	3.7	13.5	6.1	13B 76B 63-5U 102 120
YRSGM4S	H4230			M4	23.2	7.2	1.0	4.3	13.5		
YRSGM4L	H4231			M4	27.1	9.5	1.0	4.3	13.5		
YRSGM5	H4233			M5	27.1	9.5	1.0	5.3	13.5		
YRSGM6	H4234			M6	30.0	12.0	1.0	6.4	13.5		
YRSGM8	H4237			M8	34.5	15.0	1.0	8.4	13.5		
YRSGM10	H4238			M10	34.5	15.0	1.0	10.5	13.5		
YRSGM12	H4239			M12	39.1	19.2	1.0	13.0	13.5		




UNINSULATED FORK UTILUG

- Electro tinned to minimise corrosion
- Square sides provide a non-turn capability
- Suits terminal blocks




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					TOOL NO.
UF1.5M3	H4312	NO.1 22-16AWG	0.5 TO 1.5	M3	16.0	6.4	0.7	3.7	4.8	00
UF1.5M4	H4314			M4	16.0	7.2	0.7	4.3	4.8	16
UF1.5M5S	H4315			M5	16.0	8.1	0.7	5.3	4.8	63-1
UF1.5M5L	H4317			M5	16.0	9.5	0.7	5.3	4.8	76B
UF2.5M3	H4321	NO.2 16-14AWG	1.5 TO 2.5	M3	16.0	6.0	0.8	3.7	4.8	00
UF2.5M4	H4323			M4	16.0	7.2	0.8	4.3	4.8	18, 16
UF2.5M5L	H4326			M5	16.0	9.3	0.8	5.3	4.8	76B
UF6M3	H4332	NO.3 12-10AWG	2.5 TO 6.0	M3	17.4	7.2	1.0	3.7	6.0	00
UF6M4	H4331			M4	18.5	9.0	1.0	4.3	6.0	16
UF6M5	H4333			M5	18.5	9.0	1.0	5.3	6.0	63-1
UF6M6	H4334			M6	24.5	12.0	1.0	6.4	6.0	18, 76B, 124


4


SUPERGRIP FORK UTILUG

- Electro tinned to minimise corrosion
- Square sides provide a non-turn capability
- Suits terminal blocks




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	DIMENSIONS mm					TOOL NO.
RFSGM3	H4512	NO.1 22-16AWG	0.5 TO 1.5	M3	21.5	6.4	0.7	3.7	10.5	76B
RFSGM4	H4514			M4	21.5	7.2	0.7	4.3	10.5	11C or 11B
RFSGM5S	H4515			M5	21.5	8.1	0.7	5.3	10.5	63-4B
RFSGM5L	H4517			M5	21.5	9.5	0.7	5.3	10.5	102, 120
BFSGM3	H4521	NO.2 16-14AWG	1.5 TO 2.5	M3	21.5	5.7	0.8	3.2	10.5	76B
BFSGM4	H4523			M4	21.5	7.2	0.8	4.3	10.5	12C or 12B
BFSGM5S	H4525			M5	21.5	7.9	0.8	5.3	10.5	63-4U
BFSGM5L	H4526			M5	21.5	9.3	0.8	5.3	10.5	102, 120
YFSGM3	H4532	NO.3 12-10AWG	2.5 TO 6.0	M3	24.9	7.2	1.0	3.7	13.5	76B
YFSGM4	H4531			M4	26.0	9.0	1.0	4.3	13.5	13B
YFSGM5	H4533			M5	26.0	9.0	1.0	5.3	13.5	63-5U
YFSGM6	H4534			M6	32.0	12.0	1.0	6.4	13.5	102, 120



PRE-INSULATED FORK UTILUG

- Copper electro tinned to minimise corrosion
- Square sides provide a non-turn capability




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	DIMENSIONS mm				MAX. INSUL. DIA. mm	TOOL NO.
RFM3	H4412	NO.1 RED 22-16AWG	0.5 TO 1.5	M3	21.0	6.4	0.7	3.7	10.0	3.5	9A
RFM4	H4414			M4	21.0	7.2	0.7	4.3	10.0		11C OR 11B
RFM5S	H4415			M5	21.0	8.1	0.7	5.3	10.0		63-4B
RFM5L	H4417			M5	21.0	9.5	0.7	5.3	10.0		99, 102, 120
BFM3	H4421	NO.2 BLUE 16-14AWG	1.5 TO 2.5	M3	21.0	6.0	0.8	3.7	10.0	4.3	9A
BFM4	H4423			M4	21.0	7.2	0.8	4.3	10.0		12C, 12B, 76B
BFM5S	H4425			M5	21.0	7.9	0.8	5.3	10.0		63-4U
BFM5L	H4426			M5	21.0	9.3	0.8	5.3	10.0		99, 102, 120
YFM3	H4432	NO.3 YELLOW 12-10AWG	2.5 TO 6.0	M3	25.5	8.3	1.0	3.7	13.0	6.1	9A
YFM4	H4431			M4	25.5	9.0	1.0	4.3	13.0		13B, 76
YFM5	H4433			M5	25.5	9.0	1.0	5.3	13.0		63-4B
YFM6	H4434			M6	31.5	12.0	1.0	6.4	13.0		99, 102, 120



HIGH TEMPERATURE UTILUG RING TERMINAL

- Rated at 280°C
- Nickel plated




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	DIMENSIONS mm				MAX. INSUL. DIA. mm	TOOL NO.
RHT1.5M5	H3215	NO.1 22-16AWG	0.5 TO 1.5	M5	19.2	7.9	0.7	7.9	9.0	3.6	76B, 16
RHT2.5M4	H3223			M4	22.5	8.7	0.7	8.7	11.1	4.3	76B 16
RHT2.5M5	H3225			M5	22.5	8.7	0.7	8.7	11.1		
RHT2.5M6	H3227			M6	27.8	12.7	0.7	12.7	11.1		
RHT6M5	H3233	NO.3 12-10AWG	2.5 TO 6.0	M5	24.4	9.5	0.9	9.5	12.7	6.1	16, 18, 76B, 124
RHT6M6	H3234			M6	29.3	12.7	0.9	12.7	12.7		



HEAVY DUTY INSULATED RING TERMINAL

- Seamless drawn copper tube electro tinned,
- black nylon insulator • Palms radiused




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	STUD SIZE	A	B	C	E	F	MAX. INSUL. DIA. mm	TOOL NO.
RHD0.5M5S	H2001S	0.5	1/0.80	M5	26.0	8.6	0.9	11.1	12.7	3.5	76B, 60, 28A
RHD0.5M5L	H2001L			M5	29.4	8.7	0.9	15.1	12.7		
RHD0.5M6	H2002			M6	30.0	10.3	0.8	15.1	12.7		
RHD2.5M5	H2036	2.5	7/0.67	M5	26.2	9.0	1.0	11.9	12.7	4.3	76B, 60, 28A
RHD2.5M6	H2037			M6	30.9	10.3	0.9	15.1	12.7		
RHD4M5S	H2003S	4.0	7/0.85	M5	28.9	8.7	1.5	11.1	14.0	6.1	76B, 60, 28A, 124
RHD4M5L	H2003L			M5	32.6	8.7	1.4	14.7	14.0		
RHD4M6	H2004			M6	32.0	10.0	1.2	15.1	14.0		
RHD6M6	H2005	6	7/1.04	M6	31.0	10.0	1.2	15.1	13.0	6.8	60, 124
RHD10M6	H2006	10	7/1.35	M6	31.8	11.9	1.8	15.1	13.0	8.3	60, 124

4


BOOTLACE FERRULES

CAT NO.	Nominal Conductor (mm ²)	L	F	D	W	COLOUR	CRIMPING TOOL NO.
BLF05	0.5	12.0	6.0	1.3	2.6	White	#112 #125
BLF07	0.75	12.3	6.0	1.5	2.8	Blue	#112 #125
BLF1	1.0	12.3	6.0	1.7	3.3	Red	#112 #125
BLF2	1.5	14.3	8.0	2.0	3.5	Black	#112 #125
BLF3	2.5	15.4	8.0	2.6	4.0	Grey	#112 #125
BLF4	4	16.4	9.0	3.2	4.5	Orange	#112 #125 #126
BLF6	6	20.5	12.0	3.9	6.0	Green	#112 #121 #126
BLF10	10	20.8	12.0	4.9	7.5	Brown	#112 #121 #126
BLF16	16	22.2	12.0	6.2	8.7	Ivory	#121
BLF25	25	28.0	16.0	7.9	11.0	Black	#121
BLF35	35	30.0	16.0	8.7	12.5	Beige	#122
BLF50	50	36.0	20.0	10.9	15.0	Olive	#122
BLF70	70	37.0	20.0	14.3	16.0	Yellow	#38A
BLF95	95	44.0	25.0	15.3	18.5	Red	#38A
BLF120	120	47.6	27.0	17.5	20.3	Blue	#38A

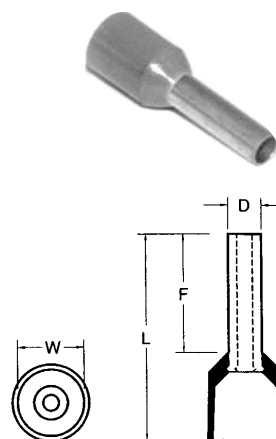

DUAL BOOTLACE FERRULES


CAT NO.	Nominal Conductor (mm ²)	L	F	D	W	COLOUR	CRIMPING TOOL NO.
BLFT07	0.75	14.7	8.0	2.1	5.5	Grey	#112 #125
BLFT1	1.0	15.1	8.0	2.3	5.5	Red	#112 #125
BLFT2	1.5	15.5	8.0	2.6	6.4	Black	#112 #125
BLFT3	2.5	18.5	10.0	3.3	8.0	Blue	#112 #125
BLFT4	4	23.1	12.0	4.2	8.8	Grey	#112 #125
BLFT6	6	26.1	14.0	5.3	9.5	Yellow	#112 #125



UNINSULATED CRIMP PIN CONNECTOR



- Electro tinned copper to minimise corrosion
- Sizes 1, 2, 3 circular pin • Sizes 4, 5 flat pin




DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	A	B	D	F	TOOL NO.
UP1.5	H2271	NO.1	0.5-1.5	15.9	1.6	9.5	5.2	76B, 00, 16B, 21
UP2.5	H2272	NO.2	1.5-2.5	17.4	2.0	10.3	5.5	76B, 00, 16B, 21
UP6	H2273	NO.3	2.5-6.0	20.6	2.8	11.9	6.6	76B, 00, 16B, 21

PRE-INSULATED PIN CONNECTOR




- Electro tinned copper to minimise corrosion
- PVC insulation • Circular pin



DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	A	B	D	F	MAX. INSUL. DIA mm	TOOL NO.
RP	H2276	NO.1 Red	0.5-1.5	21.0	1.6	9.5	10.3	3.3	76B, 11C, 11B, 99, 102, 120
BP	H2278	NO.2 Blue	1.5-2.5	23.8	2.0	10.3	11.9	4.3	76B, 12C, 12B, 99, 102, 120
YP	H2280	NO.3 Yellow	2.5-6.0	27.5	2.8	11.9	13.5	6.1	76B, 13B, 99, 102, 120

SUPERGRIP PIN CONNECTOR

- Electro tinned copper to minimise corrosion • Circular pin
- Fitted with a copper ferrule and pre-insulated for secure insulation support



DESCRIPT.	CAT NO.	TERMINAL SIZE	CONDUCTOR AREA mm ²	A	B	D	F	MAX. INSUL. DIA mm	TOOL NO.
MYPSG	H3556	NO.0 Yellow	0.2-0.5	18.3	1.2	10.0	8.3	2.2	78
RPSG	H2286	NO.1 Red	0.5-1.5	21.0	1.6	9.5	10.3	3.5	76B, 11C, 11B, 99, 102, 120
BPSG	H2287	NO.2 Blue	1.2-2.5	23.8	2.0	10.3	11.9	4.3	76B, 12C, 12B, 99, 102, 120
YPSG	H2288	NO.3 Yellow	2.5-6.0	27.5	2.8	11.9	13.5	6.1	76B, 13B, 99, 102, 120

PRE-INSULATED AND SUPERGRIP CRIMP LINK CABLE CONNECTOR

- Solid drawn copper tube • Electro tinned to minimise corrosion
- Centre dimple to ensure correct conductor traverse inside link • Vinyl insulation

STYLE 1. Parallel splice conductor area shown is total of two (or more) conductors to be connected parallel.

Ideal for inline joints between uneven sized conductor – vinyl insulation.

STYLE 2. Centre dimple to ensure correct conductor positions – vinyl insulation.


STYLE 3. Supergrip butt splice with translucent insulation (to ensure correct conductor insertion) and depressed centre to enable use in appropriate ratchet crimp tool without removal of stopper.




STYLE 1.



STYLE 2.



STYLE 3.

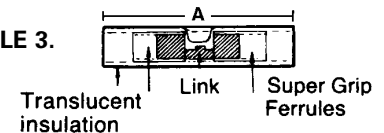


DESCRIPT.	CAT NO.	INSULATION	CONDUCTOR AREA mm ²	STYLE	DIMENSIONS A mm	MAX. INSUL. DIA. mm	TOOL NO.
RL	H2068	Red	0.5-1.5	1	13.0	3.2	76B, 11C, 11B, 63-4B, 102, 120
BL	H2069	Blue	1.5-2.5	1	13.0	4.0	76B, 12C, 12B, 63-4U, 102, 120
YL	H2070	Yellow	2.5-6.0	1	15.0	5.5	76B, 13B, 63-5U, 102, 120
RLD	H2071	Red	0.5-1.5	2	22.2	3.2	76B, 11C, 11B, 63-4B, 102, 120
BLD	H2072	Blue	1.5-2.5	2	25.4	4.0	76B, 12C, 12B, 63-4U, 102, 120
YLD	H2073	Yellow	2.5-6.0	2	27.0	5.5	76B, 13B, 63-5U, 102, 120
RLSG	H3910	Red	0.5-1.5	3	31.0	4.0	76B, 11C, 11B, 63-4B, 102, 120
BLSG	H3911	Blue	1.5-2.5	3	31.0	4.6	76B, 12C, 12B, 63-4U, 102, 120
YLSG	H3912	Yellow	2.5-6.0	3	41.0	6.2	76B, 13B, 63-5U, 102, 120

4



CLOSED END PRE-INSULATED CABLE CONNECTOR

- Electro tinned to minimise corrosion
- Nylon insulation to maximise dielectric strength




DESCRIPT.	CAT NO.	STRANDING METRIC	I.D. mm B	DIMENSIONS A mm	TOOL NO.
CEC1	H349	2X24/0.20	2.08	15.1	76B, 11A, 11B
CEC2	H2023	2X24/0.20	3.3	21	28A
CEC5	H2026	2X50/0.25	4.5	27	28A
CEC1.5	H2047	2X32/0.20	2.5	15.2	76B, 11C, 11B
CEC2.5	H2048	2X32/0.20	3.7	18	76B, 13B
CEC4	H2050	2X32/0.20	3.35	19.1	76B, 13B
CEC8	H2049	5X32/0.20	5.0	30	76B

HEAVY DUTY PRE-INSULATED CRIMP LINK CONNECTOR




- Seamless drawn copper tube
- Black nylon insulated
- Centre dimple to help locate the conductor
- Electro tinned to minimise corrosion



DESCRIPT.	CAT NO.	STRANDING METRIC	DIMENSIONS A mm	MAX. INSUL. DIA. mm	TOOL NO.
LHD2.5S	H2051	1/0.80-7/0.67	30.1	4.7	28, 76B
LHD2.5	H2067	7/0.67	30.1	4.7	28, 76B
LHD4	H2052	7/0.67-7/0.85	32.3	6.4	28, 76B
LHD6	H2053	7/1.04	29.0	8.3	28
LHD10	H2054	7/1.35	29.0	8.3	76B, 13B




2.8mm Q.C. RECEPTACLE




DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RQCSG2.8/0.8	H3558	1	Brass/ PVC	0.25	ET	17.9	3.2	0.5-1.5	Red to suit 0.8 Tab
RQCSG2.8/0.5	H3564	1	Brass/ PVC	0.25	ET	17.9	3.2	0.5-1.5	Red to suit 0.5 Tab




4.8mm Q.C. RECEPTACLES to suit 0.5mm tabs



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RQCSG4.8	H3559	1	Brass/PVC	0.40	ET	18.7	3.2	0.5-1.5	Red
RQCSG4.8F	H3563	2	Brass/PVC	0.35	ET	20.0	2.7	0.5-1.5	Red
BQCSG4.8	H3565	1	Brass/PVC	0.40	ET	18.7	4.0	1.5-2.5	Blue
BQCSG4.8F	H3566	2	Brass/PVC	0.35	ET	20.0	3.2	1.5-2.5	Blue

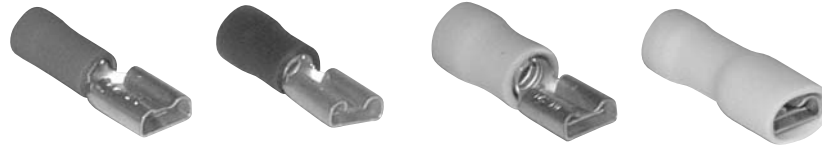


6.3mm Q.C. RECEPTACLES to suit 0.8mm tabs

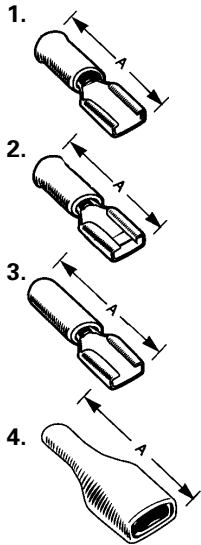

DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RQCSG6.3	H2594A	2	Brass/PVC	0.40	ET	20.5	3.5	0.5-1.5	Red
BQCSG6.3	H2595A	2	Brass/PVC	0.40	ET	20.5	4.3	1.5-2.5	Blue
YQCSG6.3	H2596A	2	Brass/PVC	0.40	ET	24.6	4.3	2.5-6.0	Yellow
RQCSG6.3L	H2594	1	Brass/PVC	0.40	ET	22.2	3.5	0.5-1.5	Red
BQCSG6.3L	H2595	1	Brass/PVC	0.40	ET	23.8	4.3	1.5-2.5	Blue
YQCSG6.3L	H2596	1	Brass/PVC	0.70	ET	25.4	6.0	2.5-6.0	Yellow
RQCSG6.3F	H3560	4	Brass/PVC	0.70	ET	22.0	2.7	0.5-1.5	Red
BQCSG6.3F	H3561	4	Brass/PVC	0.70	ET	22.0	3.2	1.5-2.5	Blue
YQCSG6.3F	H3562	4	Brass/PVC	0.70	ET	25.0	3.8	2.5-6.0	Yellow




6.3mm Q.C. TABS



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RTSG6.3	H2844	1	Brass/PVC	0.80	ET	23.2	3.5	0.5-1.5	Red
BTSG6.3	H2845	1	Brass/PVC	0.85	ET	24.8	4.3	1.5-2.5	Blue
YTSG6.3	H2846	1	Brass/PVC	0.80	ET	26.3	6.0	2.5-6.0	Yellow




6.3mm ADAPTORS Q.C. PIGGY BACK



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RPBSG6.3	H2847A	1	Brass/PVC	0.80	ET	22.2	3.5	0.5-1.5	Red
BPBSG6.3	H2848A	1	Brass/PVC	0.85	ET	22.2	4.3	1.5-2.5	Blue
YPBSG6.3	H2849	1	Brass/PVC	0.80	ET	24.0	6.0	2.5-6.0	Yellow




9.3mm Q.C. RECEPTACLES



DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
YQC9.3	H2853A	1	Brass/PVC	-	ET	29.2	6.2	2.5-6.0	Yellow


LIP BLADE TERMINALS

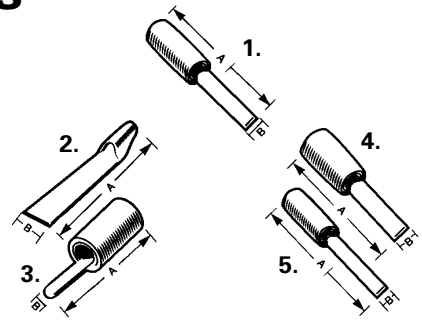

DESCRIPT.	CAT NO.	ILLUS. NO.	MATERIAL	THICKNESS	FINISH	LENGTH A mm	WIDTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RLB	H2736	1	Copper	0.7	ET	24.8	3.0	3.5	0.5-1.5	Red
BLB	H2737	1	Copper	0.7	ET	26.8	3.0	3.7	1.5-2.5	Blue
RLBSG	H2736A	1	Copper	0.8	ET	27.7	3.0	3.5	0.5-1.5	Red
BLBSG	H2737A	1	Copper	0.8	ET	27.7	3.0	4.1	1.5-2.5	Blue
YLBBSG	H2738A	1	Copper	1.0	ET	30.7	3.0	4.1	1.5-2.5	Yellow
RLLBSG	H3916A	3	Copper	0.7	ET	17.2	3.0	3.5	0.25-1.5	Lipless Miniature Blade
BLLBSG	H3917A	3	Copper	0.7	ET	18.0	3.0	4.3	0.6-3.0	Lipless Miniature Blade
YLLBSG	H3918A	3	Copper	0.9	ET	22.4	3.0	6.3	2.5-6.0	Lipless Miniature Blade
RLLBSGL	H4107A	4	Copper	0.8	ET	28.5	2.2	3.5	0.5-1.5	Lipless Long Blade
BLLBSGL	H4108A	4	Copper	0.8	ET	28.5	2.2	4.3	1.5-2.5	Lipless Long Blade
RLBW	H4107	4	Copper	0.8	ET	25.8	4.6	3.5	0.5-1.5	Red
BLBW	H4108	4	Copper	0.8	ET	25.8	4.6	4.3	1.5-2.5	Blue
YLBW	H4109	4	Copper	0.8	ET	30.3	4.6	6.3	2.5-6.0	Yellow
RLBSGW	H4207	5	Copper	0.8	ET	26.4	4.6	3.5	0.5-1.5	Red Supergrip
BLBSGW	H4208	5	Copper	0.8	ET	26.4	4.6	4.3	1.5-2.5	Blue Supergrip
YLBBSGW	H4209	5	Copper	0.8	ET	30.8	4.6	6.3	2.5-6.0	Yellow Supergrip




BULLET TERMINAL



DESCRIPT.	CAT NO.	MATERIAL	FINISH	LENGTH A mm	LENGTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RBSG	H3919	Brass/PVC	ET	20.2	4.0	3.5	0.5-1.5	Mates with H3922
BBSG	H3920	Brass/PVC	ET	20.7	5.0	4.3	1.5-2.5	Mates with H3923



BULLET RECEPTACLE



DESCRIPT.	CAT NO.	MATERIAL	FINISH	LENGTH A mm	LENGTH B mm	MAX. INSUL. DIA. mm	WIRE SIZE mm ²	NOTES
RBRSG	H3922	Brass/PVC	ET	24.0	4.0	2.7	0.5-1.5	Mates with H3919
BBSG	H3923	Brass/PVC	ET	25.0	5.0	3.2	1.5-2.5	Mates with H3920

TK22 ELECTRICAL TERMINAL KIT

- 1405 mixed supergrip terminals for 240V/415V applications
- Quality ratchet crimping tool (#102) • Tough metal carry case.



CONTENTS:

CAT. NO.	DESCRIPTION	QTY
H2594A	6.3mm QC Receptacle Red	50
H2595	6.3mm QC Receptacle Blue	100
H2596A	6.3mm QC Receptacle Yellow	50
H2844	6.3mm QC Tab Red	50
H2845	6.3mm QC Tab Blue	100
H2848A	6.3mm QC Piggy Back Adaptor	50
H3560	6.3mm QC Receptacle Red	50
H3561	6.3mm QC Receptacle Blue	50
H3562	6.3mm QC Receptacle Yellow	40
H3563	4.8mm QC Receptacle Red	50
H3910	Window Crimp Link Red	50
H3911	Window Crimp Link Blue	50
H3912	Window Crimp Link Yellow	25
H4213	4.3mm Supergrip Ring Terminal Red	100
H4215	5.3mm Supergrip Ring Terminal Red	100
H4218	6.4mm Supergrip Ring Terminal Red	80
H4223	4.3mm Supergrip Ring Terminal Blue	100
H4225	5.3mm Supergrip Ring Terminal Blue	70
H4234	6.4mm Supergrip Ring Terminal Yellow	40
H4523	4.3mm Supergrip Fork Terminal Blue	100
H4514	4.0mm Spade Connector	100
#102	Crimping Tool	1