





Electro tinned finish. Alternate sizes available on application.

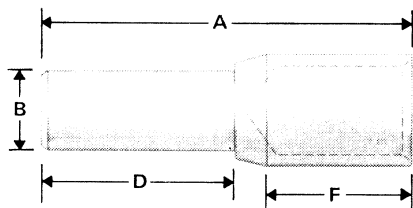


Cat. No.	Description	Area Sq. mm	Stranding Metric	Dimensions in mm			
	Metric			A	B	D	F
H2309	CS1-35/8	35	19/1.53	70	8	34	25
H2313	CS1-50/8	50	19/1.78	70	8	34	25
H2331	CS1-70/10	70	19/2.14	70	10	34	25
H2332	Imperial only		37/.064	70	10	34	25
H2333	Imperial only		37/.064	70	12	34	25
H2334	CS1-95/10	95	37/1.78	70	10	34	25
H2314	CS1-120/16	120	37/2.03	73	16	38	25
H2318	CS1-150/16	150	37/2.25	73	16	38	25
H2319	CS1-185/12	185	37/2.52	73	12	38	25
H2321	CS1-185/16	185	37/2.52	73	16	38	25
H2323	CS1-185/18	185	37/2.52	73	18	38	25
H2324	CS1-240/18	240	61/2.25	73	18	38	25

Electro tinned finish.

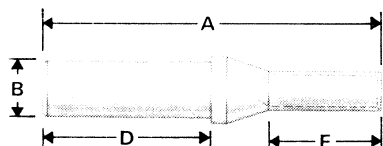


Cat. No.	Description	Area Sq. mm	Stranding Metric	Dimensions in mm			
	Metric			A	B	D	F
H2340	CS2-6/8	6	7/1.04	41	8	22	22
H2341	CS2-16/8	16	7/1.70	52	8	22	22
H2342	CS2-16/10	16	7/1.70	67	10	34	22
H2343	Imperial only		19/.044	67	10	34	22
H2344	CS2-25/10NZ	25	7/2.14	67	10	34	22
H2345	CS2-25/10	25	19/1.35	67	10	34	22
H2346	CS2-25/16	25	19/1.35	70	16	38	22
H2325	CS2-35/10	35	19/1.53	70	10	34	22
H2326	CS2-35/12	35	19/1.53	70	12	34	22
H2327	CS2-35/16	35	19/1.53	70	16	34	22
H2350	CS2-50/10	50	19/1.78	70	10	34	22
H2351	CS2-50/16	50	19/1.78	73	16	38	22
H2328	CS2-70/16	70	19/2.14	73	16	38	22
H2353	Imperial only		37/.064	70	16	38	22
H2354	CS2-95/16	95	37/1.78	70	16	34	22

Copper Electro-tinned



Cat. No.	Area Sq. mm	Wire Size mm	Dimensions in mm			
			A	B	C	D
H5102	6	7/1.04	25.4	5.5	3.7	3.0
H5103	10	7/1.35	25.4	7.1	4.7	4.0
H5104	16	7/1.70	25.4	7.9	5.5	4.0
H5105	25	19/1.35	50.8	9.5	7.1	4.0
H5106	35	19/1.53	50.8	11.5	8.4	6.4
H5107	50	19/1.78	50.8	12.7	9.5	6.4
H5108	70	19/2.14	50.8	14.3	11.0	6.4
H5109	95	37/1.78	50.8	17.4	13.4	6.4
H5110	120	37/2.03	63.5	20.6	15.5	6.4
H5111	150	37/2.25	63.5	22.2	16.3	6.4
H5112	185	37/2.52	63.5	24.2	18.4	12.7
H5114	300	61/2.52	76.2	31.9	23.8	12.7
H5116	500	61/3.2	76.2	38.1	30.0	12.7
H5118	630	127/2.52	76.2	45.0	33.5	12.7



Solid barrier. For aluminium/aluminium and aluminium/copper connections. Seamless drawn copper tube, electro tinned.

Support table, check the limits:					
Cat. No.	Area Sq. mm	Stranding Size	Dimensions in mm		Crimping Tool No.
			A		
H1783	16-4	7/1.70-7/0.85	44.4		18,20
H1783A	16-4	7/1.70-7/0.85	44.4		18,20
H1784	16-6	7/1.70-7/1.04	44.4		18,20
H1784A	16-6	7/1.70-7/1.04	44.4		18,20
H1785	16-10	7/1.70-7/1.35	44.4		18,20
H1785A	16-10	7/1.70-7/1.35	44.4		18,20






Copper lug electro tinned with barrel seam silver soldered.

Serrated barrel provides secure mechanical and electrical connection.

Available in slotted type, add suffix "C" to Cat. No.



Also available in continuous strip form. Suitable for small flexible cables.



Cat. No.	Terminal Size	Area Sq. mm	Hole Size mm E	Dimensions in mm					Crimping Tool No.
				A	B	C	D	F	
H3110	No. 1 22-16 AWG	0.5	1.8	11.7	5.5	0.71	5.5	5.2	00 76 16 18 62/1
H3111			3.4	11.7	5.5	0.71	5.5	5.2	
H3116			3.4	14.3	6.4	0.71	6.4	5.2	
H3112			3.4	15.9	7.9	0.71	7.9	5.2	
H3113		to	4.2	14.3	6.4	0.71	6.4	5.2	
H3114			4.2	15.9	7.9	0.71	7.9	5.2	
H3115			5.0	15.9	7.9	0.71	7.9	5.2	
H3117			5.0	21.4	12.7	0.71	12.7	5.2	
H3118		1.5	6.6	21.4	12.7	0.71	12.7	5.2	
H3119			8.2	21.4	12.7	0.71	12.7	5.2	
H3140			9.8	26.2	15.1	0.71	15.1	5.2	
H3120	No. 2 16-14 AWG	1.5	3.4	15.1	6.8	0.70	6.8	5.5	00 76 16 18 62/1
H3121			3.4	16.7	8.7	0.70	8.7	5.5	
H3122			4.2	15.1	6.8	0.70	6.8	5.5	
H3123			4.2	16.7	8.7	0.70	8.7	5.5	
*H3124		to	3.7	15.9	6.2	0.70	6.2	5.5	
H3125		2.5	5.0	16.7	8.7	0.70	8.7	5.5	
H3126			5.0	22.2	12.7	0.70	12.7	5.5	
H3127			6.6	22.2	12.7	0.70	12.7	5.5	
H3128			8.2	22.2	12.7	0.70	12.7	5.5	
H3129			9.8	25.4	15.1	0.70	15.1	5.5	
H3132	No. 3 12-10 AWG	2.5	3.4	18.3	9.5	0.91	9.5	6.6	00 76 16 18 62/1
H3130			4.2	15.9	7.2	0.91	7.2	6.6	
H3131			4.2	18.3	9.5	0.91	9.5	6.6	
H3133			5.3	18.3	9.5	0.91	9.5	6.6	
H3134		to	6.6	23.0	12.7	0.91	12.7	6.6	
H3137		6.0	8.2	23.0	12.7	0.91	12.7	6.6	
H3138			9.8	26.2	15.1	0.91	15.1	6.6	
H3139			13.0	32.5	19.1	0.91	19.1	6.6	
H3161			16.7	47.6	31.8	0.91	31.8	6.6	
H3162			19.8	47.6	31.8	0.91	31.8	6.6	
H3182	No. 4 10-8 AWG	6.0	5.0	23.0	11.9	1.2	11.9	7.9	00 16 18
H3183			6.6	23.0	11.9	1.2	11.9	7.9	
H3184			8.1	23.0	11.9	1.2	11.9	7.9	
H3185			9.9	50.0	31.8	1.2	31.8	7.9	
H3186		to	13.1	50.0	31.8	1.2	31.8	7.9	
H3187		8.5	16.7	50.0	31.8	1.2	31.8	7.9	
H3188			19.8	50.0	31.8	1.2	31.8	7.9	
H1851	5 AWG	20.0	17.5	54.0	31.8	1.8	31.8	15.9	20
H1851A	6 AWG	16.0	17.5	54.0	31.8	1.8	31.8	15.9	
H1851B	5 AWG	20.0	13.1	54.0	31.8	1.8	31.8	15.9	

*Palm sides parallel




Copper electro tin plated. Square sides provide a non-turn capability. Suits terminal blocks.



Cat. No.	Terminal Size	Area Sq. mm	Slot Size mm E	Dimensions in mm					Crimping Tool No.
				A	B	C	D	F	
H4312	No. 1 22-16 AWG	0.5	3.4	15.9	7.3	0.71	7.3	5.2	00 16 62/1 or 76
H4314			4.2	15.9	7.3	0.71	7.3	5.2	
H4315		to	5.0	16.7	7.8	0.71	7.8	5.2	
H4317		1.5	5.0	21.4	10.0	0.71	10.0	5.2	
H4321	No. 2 16-14 AWG	1.5 to	3.4	16.7	7.6	0.71	7.6	5.5	00, 18, 16 62/1 or 76
H4323		2.5	4.2	16.7	7.6	0.71	7.6	5.5	
H4326			5.0	21.4	10.0	0.71	10.0	5.5	
H4331	No. 3 12-10 AWG	2.5	4.2	19.1	9.5	0.91	9.5	6.6	00 16 62/1 18 or 76
H4332			3.4	19.1	9.5	0.91	9.5	6.6	
H4333		to	5.0	19.1	9.5	0.91	9.5	6.6	
H4334		6.0	6.6	26.4	13.6	0.91	13.6	6.6	





Copper electro tinned P.V.C. insulated for insulation support.
Available in continuous strip form.
Also available slotted, add suffix "C" to Cat. No.

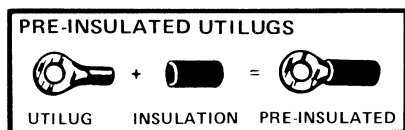

Cat. No.	Terminal Size	Area Sq. mm	Hole Size mm	Dimensions in mm						Max. Insul. Dia. mm	Crimping Tool No.
				E	A	B	C	D	F		
H4110	No. 1	0.5	1.8	16.9	5.5	0.71	5.5	10.3		3.5	
H4111			3.4	16.9	5.5	0.71	5.5	10.3			
H4116			3.4	19.4	6.4	0.71	6.4	10.3			
H4112			3.4	21.0	7.9	0.71	7.9	10.3			9A
H4113			4.2	19.4	6.4	0.71	6.4	10.3			11C
H4114	Red	to	4.2	21.0	7.9	0.71	7.9	10.3			11B
H4115			5.0	21.0	7.9	0.71	7.9	10.3			62/4B
H4117	22-16 AWG	1.5	5.0	26.6	12.7	0.71	12.7	10.3			76
H4118			6.6	26.6	12.7	0.71	12.7	10.3			
H4119			8.2	27.5	12.7	0.71	12.7	10.3			
H4140			9.8	31.4	15.1	0.71	15.1	10.3			
H4120	No. 2	1.5	3.4	21.4	6.8	0.71	6.8	11.9		4.3	
H4121			3.4	23.0	8.7	0.71	8.7	11.9			
H4122			4.2	21.4	6.8	0.71	6.8	11.9			9A
H4123			4.2	23.0	8.7	0.71	8.7	11.9			11C
H4124	Blue	to	3.7	22.2	6.2	0.71	6.2	11.9			12A
H4125			5.0	23.0	8.7	0.71	8.7	11.9			62/4U
H4126	16-14 AWG	2.5	5.0	28.5	12.7	0.71	12.7	11.9			76
H4127			6.6	28.6	12.7	0.71	12.7	11.9			
H4128			8.2	28.6	12.7	0.71	12.7	11.9			
H4129			9.8	32.0	15.1	0.71	15.1	11.9			
H4132	No. 3	2.5	3.4	25.4	9.5	0.91	9.5	6.6		6.1	
H4130			4.2	23.0	7.2	0.91	7.2	13.5			
H4131			4.2	25.4	9.5	0.91	9.5	13.5			9A
H4133			5.0	25.4	9.5	0.91	9.5	13.5			or
H4134	Yellow	to	6.6	30.1	12.7	0.91	12.7	13.5			13B
H4137			8.2	30.1	12.7	0.91	12.7	13.5			62/5U
H4138			9.8	33.3	15.1	0.91	15.1	13.5			76
H4139			13.0	40.0	19.1	0.91	19.1	13.5			
H4161	12-10 AWG	6.0	16.7	54.8	31.8	0.91	31.8	13.5			
H4162			19.8	54.8	31.8	0.91	31.8	13.5			

Copper electro tinned. Square sides provide a non-turn capability.

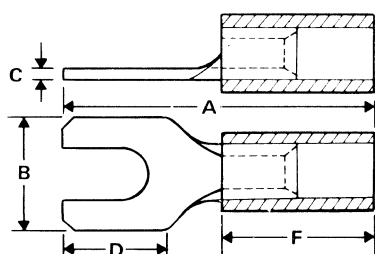

Cat. No.	Terminal Size	Area Sq. mm	Slot Size mm	Dimensions in mm						Max. Insul. Dia. mm	Crimping Tool No.
				A	B	C	D	F			
H4412	No. 1	0.5	3.4	22.0	7.2	0.71	7.2	10.3		3.5	9A
H4414			4.2	22.0	7.3	0.71	7.2	10.3			11C or 11B
H4415			5.0	21.8	7.8	0.71	7.8	10.3			76
H4417			5.0	27.3	10.0	0.71	10.0	10.3			62/4B
H4421	No. 2	1.5	3.2	23.4	7.5	0.71	7.5	11.8		4.3	9A
H4423		to	4.2	23.0	7.5	0.71	7.5	11.8			12C or 12B
H4426		2.5	5.0	33.4	10.2	0.71	10.2	11.8			76
H4432	No. 3	2.5 to 6.0	3.4	26.9	9.6	0.91	9.6	13.8		6.1	62/4U
H4431			4.2	26.9	9.6	0.91	9.6	13.8			9A
H4433			5.0	26.9	9.6	0.91	9.6	13.8			13B or 76
H4434			6.6	34.0	13.6	0.91	13.6	13.8			62/5U



Barrel has silver soldered seam, fitted with a copper ferrule and pre-insulated for secure insulation support. Copper electro tinned. Serrated barrel provides secure mechanical and electrical connection.




Available in continuous strip form.

Available slotted, add Suffix "C" to Cat. No.

All Supergrips have copper sleeved insulation.

Alternative insulator colour available on request.



SUPERGRIP UTILUGS

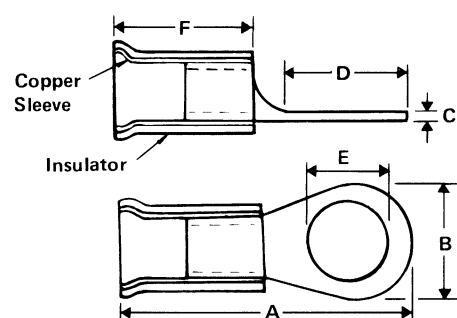

Cat. No.	Terminal Size	Area Sq. mm	Hole Size mm E	Dimensions in mm					Max. Insul. Dia. mm	Crimping Tool No.	
				A	B	C	D	F			
H4200	No.1	0.2 to 0.5	2.2	16.4	5.2	0.5	5.2	8.0	2.0	78	
H4201			3.2	16.4	5.2	0.5	5.2	8.0	2.0		
H4202		4.3	19.0	6.6	0.5	6.6	8.0	2.0			
H4203		5.3	19.0	8.0	0.5	8.0	8.0	2.0			
H4210		1.8	16.9	5.5	0.71	5.5	10.8	3.5			
H4211		3.4	16.9	5.5	0.71	5.5	10.8	3.5			
H4216		3.4	19.4	6.4	0.71	6.4	10.8	3.5			
H4212	Red	0.5 to	3.4	21.0	7.9	0.71	7.9	10.8	3.5	11C	
H4213			4.2	19.4	6.4	0.71	6.4	10.8	3.5	11B	
H4214	22-16 AWG	1.5	4.2	21.0	7.9	0.71	7.9	10.8	3.5	76	
H4215			5.0	21.0	7.9	0.71	7.9	10.8	3.5	62/4B	
H4217			5.0	26.6	12.7	0.71	12.7	10.8	3.5		
H4218			6.6	26.6	12.7	0.71	12.7	10.8	3.5		
H4219			8.2	27.5	12.7	0.71	12.7	10.8	3.5		
H4240			9.8	31.4	15.1	0.71	15.1	10.8	3.5		
H4220	No. 2	1.5	3.4	21.4	6.8	0.70	6.8	12.1	4.3		
H4221			3.4	23.0	8.7	0.70	8.7	12.1	4.3		
H4222			4.2	21.4	6.8	0.70	6.8	12.1	4.3		
H4223			4.2	23.0	8.7	0.70	8.7	12.1	4.3	12C	
*H4224	Blue	to	3.7	22.2	6.2	0.70	6.2	12.1	4.3	12B	
H4225	16-14 AWG	2.5	5.0	23.0	8.7	0.70	8.7	12.1	4.3	76	
H4226			5.0	28.5	12.7	0.70	12.7	12.1	4.3	62/4 U	
H4227			6.6	28.6	12.7	0.70	12.7	12.1	4.3		
H4228			8.2	28.6	12.7	0.70	12.7	12.1	4.3		
H4229			9.8	32.0	15.1	0.70	15.1	12.1	4.3		
H4250	No. 2 Heavy Duty Grey	1.5	3.4	25.4	9.5	1.21	9.5	13.3	6.1		
H4251			4.2	23.0	7.2	1.21	7.2	13.3	6.1		
H4252			5.0	25.4	9.5	1.21	9.5	13.3	6.1		
H4253			6.6	30.1	12.7	1.21	12.7	13.3	6.1	13B	
H4254			8.2	30.1	12.7	1.21	12.7	13.3	6.1	76	
H4255			to	9.8	33.3	15.1	1.21	15.1	13.3	6.1	62/5U
H4256			16-14 AWG	2.5	13.0	39.7	17.4	1.21	17.4	13.3	6.1
H4257			16.7	54.8	31.8	1.21	31.8	13.3	6.1		
H4258			19.8	54.8	31.8	1.21	31.8	13.3	6.1		
H4232	No. 3 Yellow	2.5	3.4	25.4	9.5	0.91	9.5	13.3	6.1		
H4230			4.2	23.0	7.2	0.91	7.2	13.3	6.1		
H4231			4.2	25.4	9.5	0.91	9.5	13.3	6.1		
H4233			5.0	25.4	9.5	0.91	9.5	13.3	6.1	13B	
H4234			to	6.6	30.1	12.7	0.91	12.7	13.3	6.1	76
H4237			8.2	30.1	12.7	0.91	12.7	13.3	6.1	62/5U	
H4238			12-10 AWG	6.0	9.8	33.3	15.1	0.91	15.1	13.3	6.1
H4239			13.0	40.0	19.1	0.91	19.1	13.3	6.1		
H4261			16.7	54.8	31.8	0.91	31.8	13.3	6.1		
H4262			19.8	54.8	31.8	0.91	31.8	13.3	6.1		

* Palm sides parallel.


Copper electro tinned. Serrated barrel provides secure electrical and mechanical connection. Features silver soldered seam.





Cat. No.	Terminal Size	Area Sq. mm	Slot Size mm E	Dimensions in mm					Crimping Tool No.
				A	B	C	D	F	
H4512	No. 1	0.5	3.4	22.0	7.2	0.71	7.2	10.3	9A
H4514	22-16 AWG	to	4.2	22.0	7.3	0.71	7.3	10.3	11C or
H4515		1.5	5.0	21.8	7.8	0.71	7.8	10.3	11B
H4517			5.0	27.3	10.1	0.71	10.0	10.3	
H4521	No. 2	1.5	3.2	23.4	7.5	0.71	7.5	11.8	9A
H4523	16-14 AWG	to	4.2	23.4	7.5	0.71	7.5	11.8	12C or
H4526		2.5	5.0	33.4	10.2	0.71	10.2	11.8	12B
H4532	No. 3	2.5 to 6.0	3.4	26.9	9.6	0.91	9.6	13.8	9A
H4531	12-10 AWG		4.2	26.9	9.6	0.91	9.6	13.8	13B
H4533			5.0	26.9	9.6	0.91	9.6	13.8	76
H4534			6.6	34.0	13.6	0.91	13.6	13.8	

Rated at 280°C

HIGH-TEMP. SUPER GRIP UTILUG





UTILUG COPPER SLEEVE HIGH-TEMP. SUPERGRIP

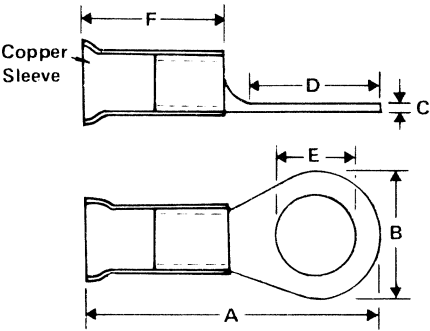

Cat. No.	Terminal Size	Area Sq. mm ²	Hole Size mm	Dimensions in mm					Max. Insul. Dia. mm	Crimping Tool No.
				E	A	B	C	D	F	
H3210	No. 1	0.5	1.8	15.1	5.5	0.71	5.5	9.0	3.5	16
H3211			3.4	15.1	5.5	0.71	5.5	9.0	3.5	
H3216			3.4	17.6	6.4	0.71	6.4	9.0	3.5	
H3212			3.4	19.2	7.9	0.71	7.9	9.0	3.5	
H3213			4.2	17.6	6.4	0.71	6.4	9.0	3.5	
H3214	Red	to	4.2	19.2	7.9	0.71	7.9	9.0	3.5	18
H3215	22-16 AWG	1.5	5.0	19.2	7.9	0.71	7.9	9.0	3.5	16
H3217			5.0	24.8	12.7	0.71	12.7	9.0	3.5	
H3218			6.6	24.8	12.7	0.71	12.7	9.0	3.5	
H3219			8.2	25.7	12.7	0.71	12.7	9.0	3.5	
H3240			9.8	29.6	15.1	0.71	15.1	9.0	3.5	
H3220	No. 2	1.5	3.4	19.9	6.8	0.71	6.8	10.5	4.3	11
H3221			3.4	21.5	8.7	0.71	8.7	10.5	4.3	
H3222			4.2	19.9	6.8	0.71	6.8	10.5	4.3	
H3223			4.2	21.5	8.7	0.71	8.7	10.5	4.3	
*H3224			3.7	20.7	6.2	0.71	6.2	10.5	4.3	
H3225	16-14 AWG	2.5	5.0	21.5	8.7	0.71	8.7	10.5	4.3	18
H3226			5.0	27.0	12.7	0.71	12.7	10.5	4.3	
H3227			6.6	27.1	12.7	0.71	12.7	10.5	4.3	
H3228			8.2	27.1	12.7	0.71	12.7	10.5	4.3	
H3229			9.8	30.4	15.1	0.71	15.1	10.5	4.3	
H3232	No. 3	2.5	3.4	24.4	9.5	0.91	9.5	12.3	6.1	16
H3230			4.2	22.0	7.2	0.91	7.2	12.3	6.1	
H3231			4.2	24.4	9.5	0.91	9.5	12.3	6.1	
H3233			5.0	24.4	9.5	0.91	9.5	12.3	6.1	
H3234			6.6	29.1	12.7	0.91	12.7	12.3	6.1	
H3237	Yellow	to	8.2	29.1	12.7	0.91	12.7	12.3	6.1	18
H3238	12-10 AWG	6.0	9.8	32.3	15.1	0.91	15.1	12.3	6.1	
H3239			13.0	39.0	19.1	0.91	19.1	12.3	6.1	
H3261			16.7	43.8	31.8	0.91	31.8	12.3	6.1	
H3262			19.8	43.8	31.8	0.91	31.8	12.3	6.1	


* Palm sides parallel

Seamless drawn copper tube electro tinned, black nylon insulator. Palms radiused.



Cat. No.	Area Sq. mm	Stranding Metric	Hole Size mm	Dimensions in mm					Max. Dia. mm Insul.	Crimping Tool No.
				E	A	B	C	D	F	
H2001S	0.5	1/0.80	5.0	26.0	8.6	0.86	8.6	12.3	4.7	76, 60, 28
H2001L			5.0	29.4	8.7	1.0	8.7	12.3	4.7	
H2002			6.7	30.0	11.1	0.8	11.1	12.3	4.7	
H2036	2.5	7/0.67	4.8	25.8	8.7	1.2	8.7	12.7	4.7	76, 60, 28
H2037			6.4	29.4	10.3	0.8	10.3	12.7	4.7	
H2003S	4.0	7/0.85	5.0	27.4	8.3	1.5	8.3	14.6	6.4	76, 60, 28
H2003L			5.0	32.6	8.5	1.6	8.5	14.6	6.4	
H2004			6.7	33.0	11.5	1.2	11.5	14.6	6.4	
H2005	6	7/1.04	6.7	32.5	10.3	1.2	10.3	13.0	6.75	60
H2006	10	7/1.35	6.7	33.4	11.9	2.3	11.9	13.0	8.3	


Seamless drawn copper tube, electro tinned, barrel reamed.

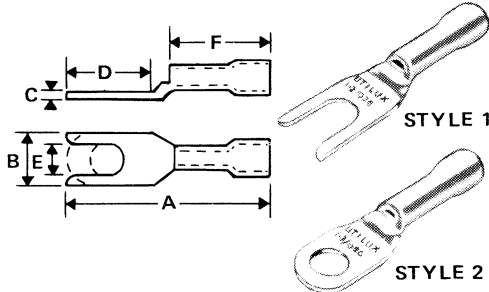

Cat. No.	Area Sq. mm	Stranding Metric	Hole Size mm	Style	Dimensions in mm					Max. Dia. mm Insul.	Crimping Tool No.
					A	B	C	D	F		
H1473	0.5	1/0.80	4.8	1	31.8	7.9	1.2	7.9	14.3	4.4	00 or 16
H1476			4.8	2	31.8	8.7	1.2	8.7	14.3	4.4	
H1477			6.4	2	31.8	10.3	0.8	10.3	14.3	4.4	
H1478	4.0	7/0.85	4.8	2	33.7	9.1	1.2	9.1	15.5	4.8	00 or 16
H1479			6.4	2	33.7	10.3	1.2	10.3	15.5	4.8	




UNINSULATED

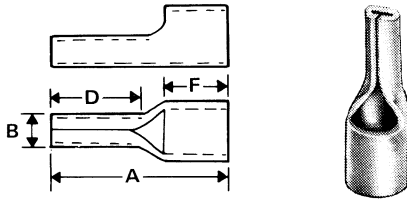


Electro tinned copper, P.V.C. insulation. Sizes 1, 2, 3 have a circular pin section. Sizes 4, 5 have a flat pin section.

Cat. No.	Terminal Size	Area Sq. mm	Dimensions in mm				Crimping Tool No.
			A	B	D	F	
H2271	No. 1	0.5-1.5	15.9	1.6	9.5	5.1	00, 16, 10, 21
H2272	No. 2	1.5-2.5	17.4	2.0	10.3	5.5	00, 16, 10, 21
H2273	No. 3	2.5-6.0	20.6	2.8	11.9	6.6	16, 18
H2274	No. 4	.007-.0145 in.	23.8	4.8	12.7	5.3	16, 18
H2275	No. 5	.0145-.025 in.	27.0	5.5	13.5	9.5	16, 18

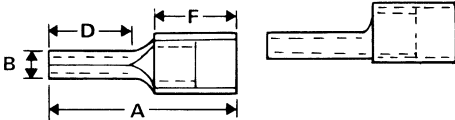


Cat. No.	Terminal Size	Area Sq. mm	Dimensions in mm				Crimping Tool No.
			A	B	D	F	
H2276	No. 1	0.5-1.5	21.8	1.6	9.5	10.5	11C, 11B
H2278	No. 2	1.5-2.5	23.8	2.0	10.3	12.0	12C, 12B
H2280	No. 3	2.5-6.0	27.7	2.8	11.9	13.6	13B

PRE-INSULATED/SUPERGRIP

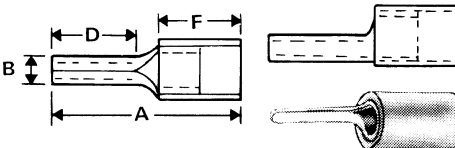

Cat. No.	Terminal Size	Area Sq. mm	Dimensions in mm				Crimping Tool No.
			A	B	D	F	
H3556	No. 0	0.2 to 0.5	18.9	1.2	10	9.0	78
H2286	No. 1	0.5 to 1.5	21.5	1.6	9.5	10.5	11C, 11B
H2287	No. 2	1.5 to 2.5	23.8	2.0	10.3	12.0	12C, 12B
H2288	No. 3	2.5 to 6.0	20.6	2.8	11.9	13.6	13B



Style 1 Parallel splice conductor area shown is total of two (or more) conductors to be connected parallel. Ideal for inline joints between uneven sized conductors — vinyl insulation.

Style 2 Centre dimple to ensure correct conductor positions — vinyl insulation.


Style 3 Supergrip butt splice with translucent insulation (to ensure correct conductor insertion) and depressed centre to enable use in appropriate ratchet crimp tool with out removal of the stopper.

Solid drawn copper tube, electro tinned.


Centre dimple to ensure correct conductor traverse inside link. Vinyl insulation.

Cat. No.	Area Sq. mm	Stranding Metric	Style	Dimensions in mm A	Max. Insul. Dia. mm	Crimping Tool No.
H2068	0.5 to 1.5	No. 1	1	15.9	3.2	76, 11C, 11B
H2071	0.5 to 1.5	No. 1	2	22.2	3.2	76, 11C, 11B
H2069	1.5 to 2.5	No. 2	1	7.9	4.0	76, 12C, 12B
H2072	1.5 to 2.5	No. 2	2	25.4	4.0	76, 12C, 12B
H2070	2.5 to 6.0	No. 3	1	20.4	5.5	76, 13B
H2073	2.5 to 6.0	No. 3	2	27.0	5.5	76, 13B
H3910	0.5 to 1.5	Red No.1	3	31.5	3.6	76, 11C, 11B
H3911	1.5 to 2.5	Blue No. 2	3	31.5	4.3	76, 12C, 12B
H3912	2.5 to 6.0	Yellow No. 3	3	19.0	6.4	76, 13B

Electro tinned copper, nylon insulated.



Cat. No.	Stranding Metric	Dimensions in mm A	Crimping Tool No.	Insert Cat. No.
H349	2x24/0.20	15.1	76, 11C, 11B	H2019 for H2046
H2023	2x24/0.20	21.0	28A	H2020 for H2026
H2024	2x50/0.25	27.0	28A	H2021 for H2050
H2026	—	18.0	—	H2022 for H2026
H2046	2x24/0.20	15.24	76, 11C, 11B	
H2047	2x32/0.20	15.24	76, 11C, 11B	
H2048	3x32/0.20	18.0	76, 13B	
H2050	3x32/0.20	19.1	76, 13B	
H2049	5x32/0.20	22.2	76	



Seamless drawn copper tube, electro tinned, black nylon insulated, centre dimple.

Cat. No.	Area Sq. mm	Stranding Metric	Dimensions in mm A	Max. Insul. Dia. mm	Crimping Tool No.
H2051	0.5-2.5	1/0.80-7/0.67	30.1	4.7	60, 28, 76
H2067	2.5	7/0.67	30.1	4.7	60, 28, 76, 16
H2052	2.5-4.0	7/0.67-7/0.85	32.3	6.4	60, 28, 76, 16
H2053	6.0	7/1.04	29.0	8.3	60, 28, 16
H2054	10.0	7/1.35	29.4	8.3	76, 13B