

MPT-200A WIRE CRIMP PULL TESTER



STANDARD FEATURES

- Capacity: 200 lb
- Resolution: 0.1 lb
- Accuracy: $\pm (0.5 \% \text{ Reading} + 1 \text{ LSD})$
- Digital Display with Peak Hold
- LED Display with 0.56" High Digits
- 1" - 10" Per minute Selectable Rate of Pull in ten 1"/min increments
 $\pm 1/8"/\text{min}$ @ 1" - 5"/min
 $\pm 1/4"/\text{min}$ @ 6" - 10"/min
- Auto Stop on Wire/Crimp Break
- Auto Stop Enable/Disable Switch
- Auto Return to Start Position in Reset Mode
- Factory Set Overload Protection
- Versatile 15-Position Slotted Terminal Lower Grip (P/N 15-3087)
- Self-Tightening Cam-Type Upper Grip (P/N 15-3040)
- Easy Setup and Operation
- Compact Size
- AC Line Filter
- 115 VAC 50/60Hz Power with .3 Amp Fuse

OPTIONAL FEATURES

- 250 lb. Capacity with 1 lb. Resolution (P/N MPT-250A)
- Display Units in Kilograms (P/N 15-1550-1)
- Display Units in Newtons (P/N 15-1550-2)
- Lbs/Kilograms Switching (P/N 15-1544)
- Lbs/Newton Switching (P/N 115-1543)
- Adjustable Load Set Point for Motor Stop (P/N 15-1547)
- Constant Force Mode - per UL 486A (P/N 15-7007)
- RS-232C Compatible Output (P/N 15-7001)
- 0 - 2 VDC Analog Output (P/N 15-2001)
- 7.5" - 30" per minute Rate of Pull (P/N 15-1101)
- 230 VAC 50/60 Hz Power (P/N 15-7004)

OPTIONAL ACCESSORIES


- Self-Tightening Cam-Type Lower Grip (P/N 15-3202)
- Heavy-Duty Swivel Lockdown Upper Grip (P/N 15-3032 and 15-0080)
- Ring Terminal Lower Grip (P/N 15-0066)

PHYSICAL

- Weight 25 Lbs (less options)
- Shipping Weight 31 Lbs (less options)
- Base Dimensions: H. 15.5", W. 10", D. 16"


MPT-200A-SC

- Fitted for Testing Safe-T-Cable Assemblies

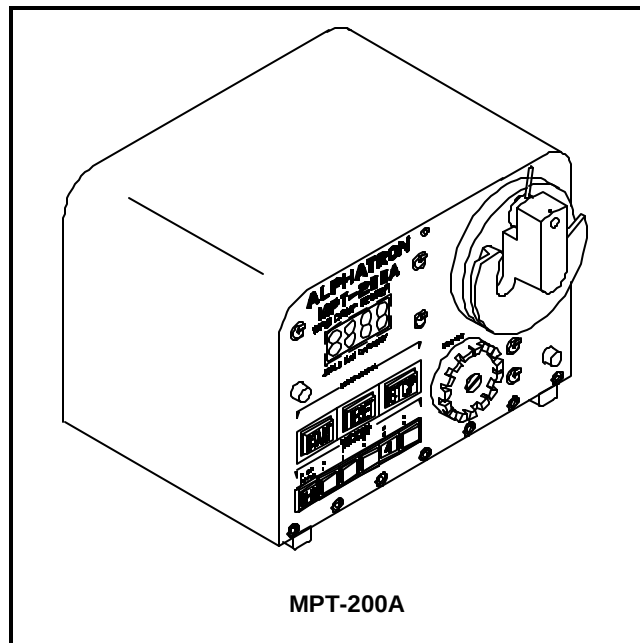

MPT-200A


STANDARD UPPER GRIP

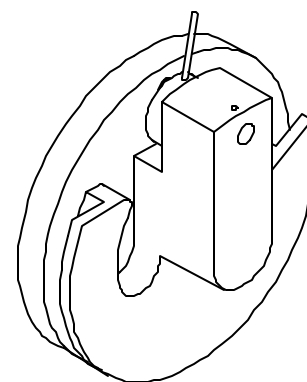

15-3040 - Self-Tightening (Upper)

OPTIONAL GRIPS


Upper Grip



15-3032


15-0080

Self-Tightening
(Lower)



15-3202

Ring Terminal




15-0066

STANDARD LOWER GRIP

SLOT DIMENSION	
1 .031"	9 .094"
2 .250"	10 .188"
3 .047"	11 .110"
4 .236"	12 .172"
5 .063"	13 .125"
6 .218"	14 .158"
7 .080"	15 .141"
8 .203"	

Slotted Terminal



15-3087

526 THORPE ROAD, ORLANDO, FL 32824, USA • PHONE (407) 855-6161 • FAX (407) 855-6884