

# CASA Type #: 11PAL-75-4-RG59-EF125-YB

Suitable cables include industry standard 75 Ohm solid centre conductor types with 4mm solid or foamed dielectric with braided screens (with or without foil-wraps)

RG-59A/U


RG-59B/U

other RG-59 types subject to testing.

# DRAFT



Overall  
Ø 11.00

Max Cable  
Ø 7.60




XXmm Hex  
AF size

Recommended Hex Crimp Dies  
X.X mm AF (nominally 8~10mm long)

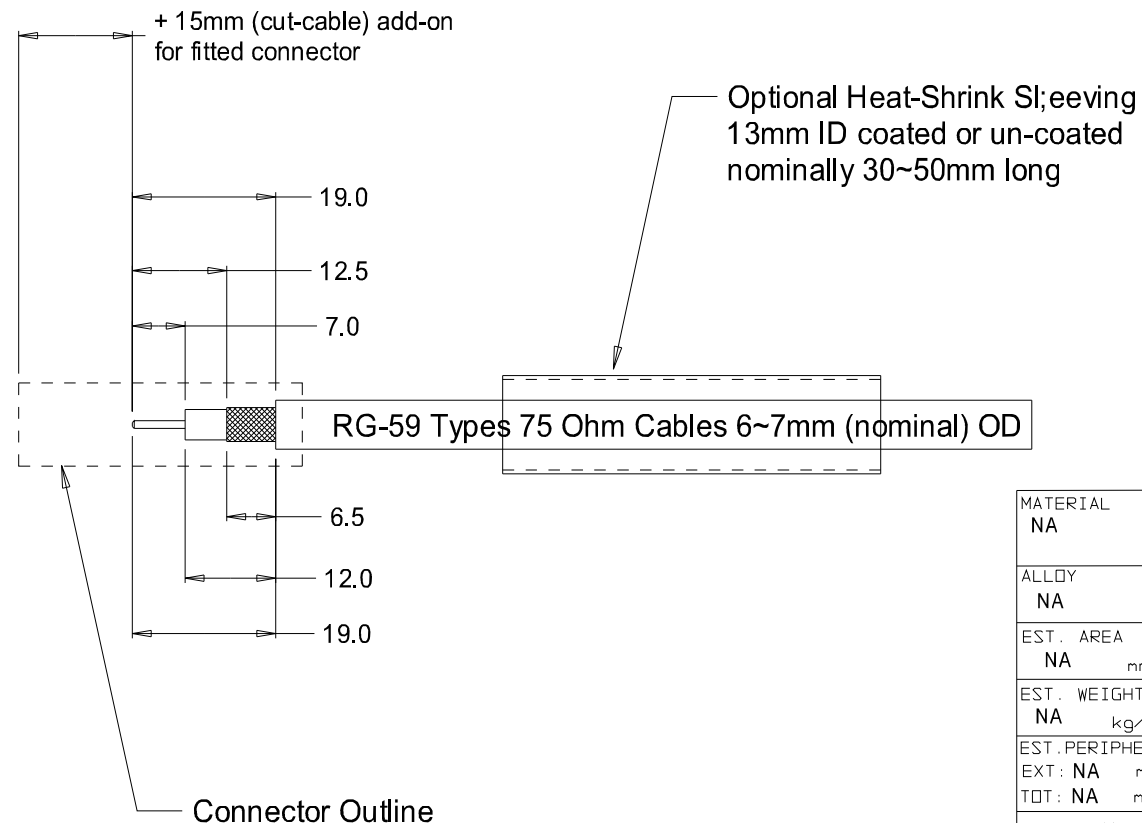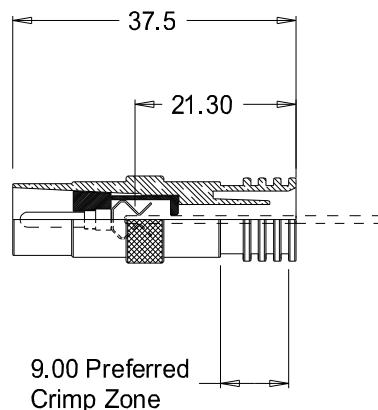

MATERIAL NA
ALLOY NA
EST. AREA NA mm
EST. WEIGHT NA kg/m
EST. PERIPHERY EXT: NA mm TOT: NA mm
TOLERANCE 0.00mm ±0.1mm 00.0mm ±0.25mm 0000mm ±0.5mm 0~600mm ±0.1mm > 600mm ±0.5mm
BS1474:1987 APPLIES UNLESS OTHERWISE SPECIFIED
JOB No. <b>3000</b>

Supplier: Yubright (Taiwan)  
OEM #: EF125RG59  
Batch #: T08081501

 <b>Modular Systems</b> Petone 5012, WELLINGTON, NEW ZEALAND TELEPHONE : (64-4) 9393 777 WWW Address: www.casa.co.nz	CUSTOMER : <b>CASA Modular Systems</b>		SIZE	DRAWING Reference No.	ISSUE
	DESCRIPTION : Semi-Crimp PAL Plugs & Sockets from YuBright etc.		<b>A4</b>	<b>11PAL-EF125RG59</b>	<b>A</b>
DRAWN : <b>AWD</b>	DATE : <b>29/05/19</b>	APPROVED : <b>?</b>	DWG. SCALE : <b>1:1</b>	© COPYRIGHT : CASA Modular Systems ALL RIGHTS RESERVED	