



CONNETTORI COASSIALI 1.0/2.3 COAXIAL CONNECTORS

Connettore maschio volante.
Sistema d'accoppiamento : scatto autobloccante.
Conforme a norme DIN 47297 e CECC 22230
Impedenza : 75Ω
Frequenza d'impiego : ≤ 2 GHz.
Coefficiente di riflessione : ≤ 0,1

Free plug.
Coupling type : push-pull.
According to DIN 47297 and CECC 22230
Impedance : 75Ω
Frequency range : ≤ 2 GHz.
Reflection coefficient : ≤ 0,1

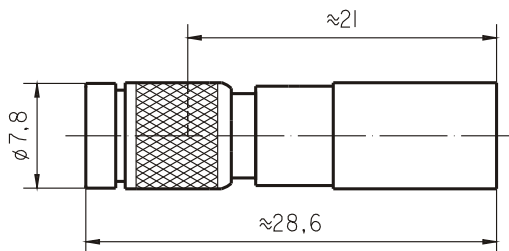

Part. nr.	Cavo/ Cable (75Ω)	φ ext.
350.064.051	ST 214	5,9 max.
	RG 59B/U	6,15 ±0,1

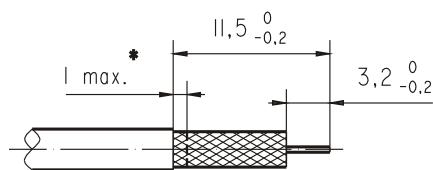

* Tagliare il nastro intermedio alla quota indicata.
Trim the intermediate foil to the indicated dimension.

Sistema di attacco al cavo

Contatto interno : a saldare o a crimpare con quadro 1 e lunghezza di crimpatura 1,5 (per ST 214)
a saldare (per RG 59B/U)

Contatto esterno : a crimpare con esagono 6,8 e lunghezza di crimpatura 10.

Cable attachment

*Inner contact : soldering or crimping - die closure dimension square 1 and length of crimping 1.5 (for ST 214)
soldering (for RG 59B/U)*

Outer contact : crimping - die closure dimension HEX 6.8 and length of crimping 10.

ED.	DATA/ DATE	FIRMA / SIGN.	ED.	DATA/ DATE	FIRMA / SIGN.	ED.	DATA/ DATE	FIRMA / SIGN.
01	11.11.92	Mm Eb	04	12.12.96	Gb Eb			
02	15.12.92	Mm Eb	05	08.05.00	Gb Cv			
03	07.4.93	Cv Eb						