


CONNETTORI COASSIALI 1.0/2.3 COAXIAL CONNECTORS


Connettore femmina - inserto per connettori secondo DIN 41612 tipo M.
Conforme a norme DIN 41626 parte 2.
Impedenza : 75Ω
Frequenza d'impiego : ≤ 2 GHz.
Coefficiente di riflessione : $\leq 0,1$

Bulkhead jack for connectors according to DIN 41612, designs M.
According to DIN 41626, part 2.
Impedance : 75Ω
Frequency range : ≤ 2 GHz.
Reflection coefficient : $\leq 0,1$

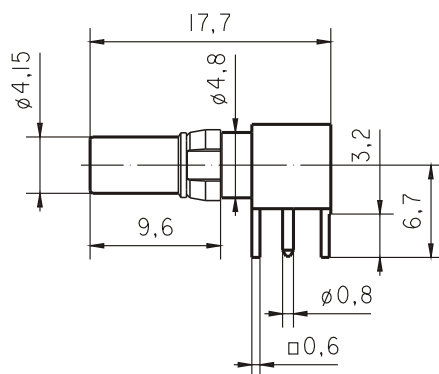

Part. nr.
350.064.831

Dimensioni dima di foratura
Mounting holes

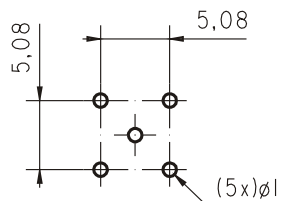

ED.	DATA/ DATE	FIRMA / SIGN.	ED.	DATA/ DATE	FIRMA / SIGN.	ED.	DATA/ DATE	FIRMA / SIGN.
01	12.10.92	Mm Eb						
02	06.11.92	Mm Eb						