

Description

The 1.6/5.6 series is a European design with two coupling versions: Threaded provides positive mating, Push-pull allows quick installation. Amphenol 1.6/5.6 coaxial connectors are miniature 75 ohm units operating from 0-1GHz.

The compact design of the 1.6/5.6 permits dense connector packing making these connectors ideally suited to applications where space limitation is a factor.

This series complies with DIN 47295, DIN 41626, DIN 47297, NFC 93-569, NFC 93-570, IEC 169-13, and the CECC 22230 standards.

Features/Benefits

- Meets IEC 169-13, DIN 47295 and NFC 93-570 international specifications designed for SMT.
- Plugs and bulkhead jacks are available in crimp-crimp termination versions to ensure high reliability in connector assembly and a lower cost installation method.
- Threaded coupling designed for quick connect/disconnect allows safe coupling.

Application


- Base Stations
- Cable Assemblies
- Computer / LAN
- Routers
- Switching Equipment
- Telecom
- Wireless



1.6/5.6


Specifications	102
Plugs & Receptacles	103

Fig. 1

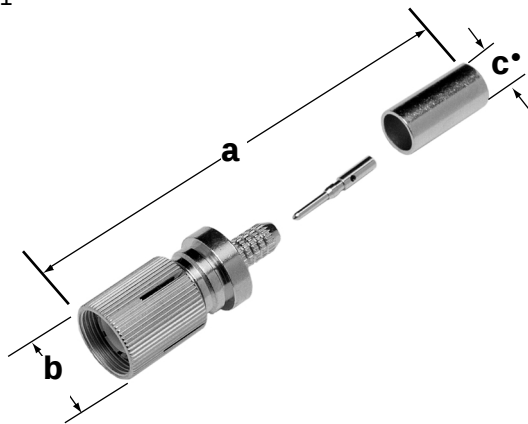


Straight Plugs
156-929-02, 156-929-34, 156-112-RG59

Fig. 2

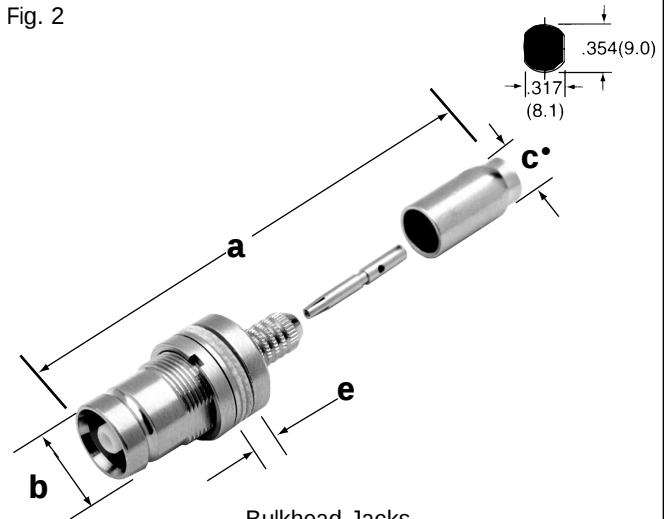


Bulkhead Jacks
156-931-02, 156-931-34, 156-642-RG59

Fig. 3

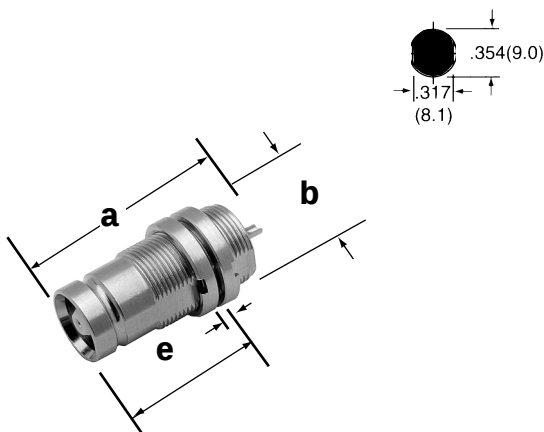

Receptacle
156-343-03

Fig. 4

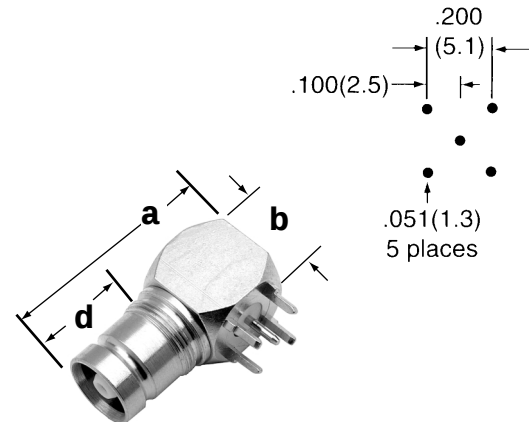

Printed Circuit Receptacle
156-335-01

1.6/5.6 PLUGS, BULKHEAD JACKS, RECEPTACLES

Connector. Description	Cable	Cable Attachment		Dimensions, inches (millimeters)					Amphenol Number	Fig.
		Outer	Inner	a	b	c •	d	e		
Plug	L910/34 BT3002	Crimp	Crimp	1.18 (30.0)	.425 (10.8)	.161 (4.1)	—	—	156-929-34	1
	L910/16	Crimp	Crimp	1.18 (30.0)	.425 (10.8)	.205 (5.2)	—	—	156-929-02	1
	RG59	Crimp	Crimp	.984 (25.0)	.433 (11.0)	.220 (5.6)	—	—	156-112-RG59	1
Bulkhead Jack	L910/34 BT3002	Crimp	Crimp	1.26 (32.0)	.425 (10.8)	.161 (4.1)	.543 (13.8)	.047 (1.2)	156-931-34	2
	L910/16	Crimp	Crimp	1.26 (32.0)	.425 (10.8)	.205 (5.2)	.543 (13.8)	.047 (1.2)	156-931-02	2
	RG59	Crimp	Crimp	1.00 (25.5)	.425 (10.8)	.220 (5.6)	—	—	156-642-RG59	2
Receptacle	Front Mount or Rear Mount	Solder Cup		.906 (23.0)	.425 (10.8)	—	.630 (16.0)	.138 (3.5)	156-343-03	3
Printed Circuit Receptacle 4 legs & terminal .118 (3.0) long x .039 (1.0) diameter / .039 (1.0) stand off pads		Blunt Post		.827 (21.0)	.433 (11.0)	—	.433 (11.0)	—	156-335-01	4

• accommodates cable diameter ■ includes outer ferrule