




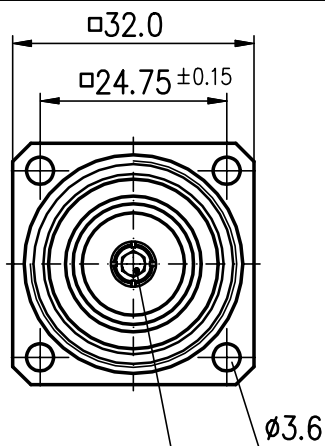


detail "X":
scale 2:1



hexagon socket 3

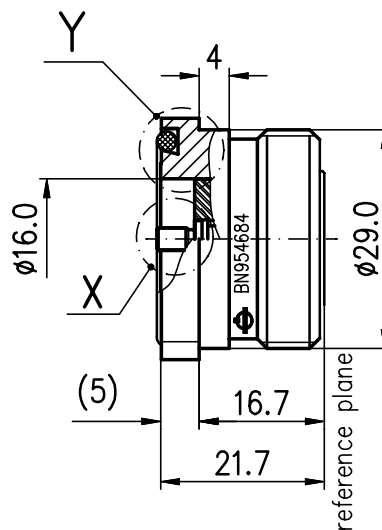

detail "Y":
scale 5:1

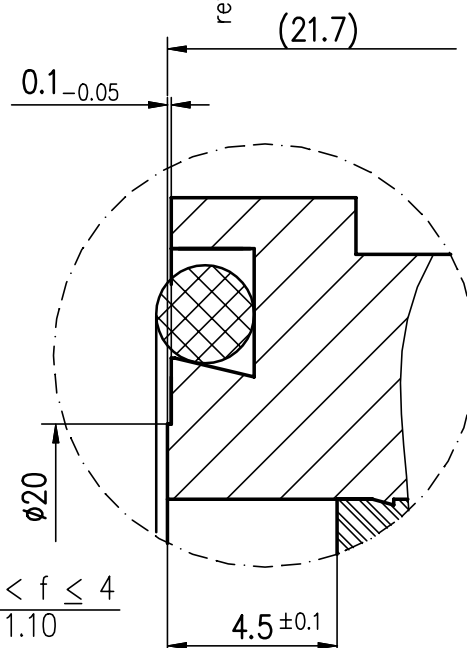

electrical data:

impedance
frequency range f/GHz
VSWR
IM3
(2x20W; 936MHz; 958MHz)
(2x20W; 1770MHz; 1810MHz)

50 ohms

$0 < f \leq 1$	$1 < f \leq 2$	$2 < f \leq 4$
≤ 1.04	≤ 1.06	≤ 1.10

 ≤ -165 dBc

material and surfaces:

inner conductor	copper alloy /silver-plated
outer conductor	copper alloy /silver-plated
insulation	PTFE
sealing	EPDM

version:

panel sealed

standards:

CECC 22 190, IEC 169-4

contact captivation torque:

min. 45 Ncm

(dimensions in mm)

modifications reserved

Nicht tolerierte Maße nach DIN ISO 2768-m Teil 1				Datum		Name		Bezeichnung: Fixed Socket 7-16 (50 ohms)				
				Erstellt	17.02.2000	Mueller						
				Geprüft	15.01.2002	Landinger						
				Gesehen								
D	div.Änd.	15.01.2002	Abeska	 Spinner GmbH Elektrotechnische Fabrik Erzgießereistraße 33 D-80335 München			Zeichnungs-Nr.: 954684-0E		Format A4		Maßstab 1:1	
C	CAD14upd.	08.02.2001	Landinger									
B	Text ber.	08.02.2001	Prommers									
A	Text ber.	13.03.2000	Landinger									
Ind.	Änd.-Nr.	Datum	Geändert									