

Kabelkuppler gerade
Straight cable socket


Kabel Cable	Z	BN	Abdichtung* Sealing*
RG 213/U	50	29 81 20	Profildichtung profile gasket
RG 214/U; RG 393/U	50	95 19 20	Crimpausführung crimp version
		95 19 22	
RG 217/U	50	93 02 01	Profildichtung profile gasket
RG 218/U	50	92 36 00	
SCF 14-50	50	65 99 60	Schrumpfschlauch heatshrink sleeve
SCF 38-50	50	71 03 61	
SCF//UCF 12-50	50	71 03 60	
HCA 38-50	50	97 07 15	Plast 2000
		97 07 28	
HCA 58-50	50	92 56 25	
HCA 78-50	50	49 90 18	
HCA 118-50	50	84 68 03	Plast 2000
HCA 158-50	50	69 07 10	
LCF 38-50	50	71 03 69	O-Ring und Schrumpfschlauch O-Ring and heat- shrink sleeve
LCF 12-50	50	71 03 68	Plast 2000
LCF 58-50	50	65 56 61	
LCF/UCF 78-50	50	65 56 68	
LCFS 114-50	50	65 56 74	
LCF 158-50	50	65 56 78	
LCF 214-50	50	65 56 71	

* Abdichtung zwischen Kabel und Steckverbinder


* Sealing between cable and connector

Gehäusekuppler für Einlochbefestigung
(Montage von hinten),
Fixed socket for single hole mounting
(rear mounting),


Kabel Cable	Z	BN	Abdichtung Sealing
RG 401/U	50	80 77 33	Löt-Technik solder
RG 402/U	50	80 77 88	

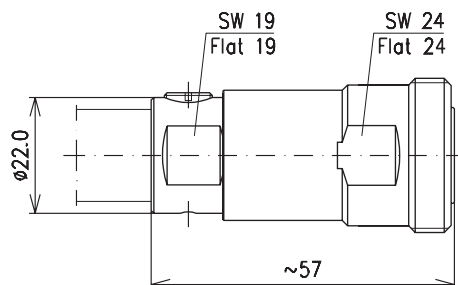

BN 71 03 68

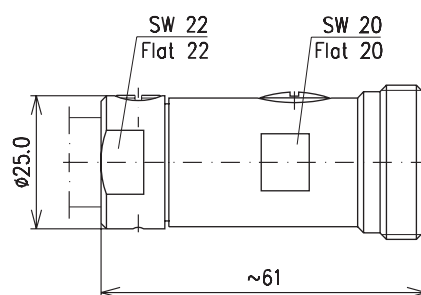

BN 97 07 28

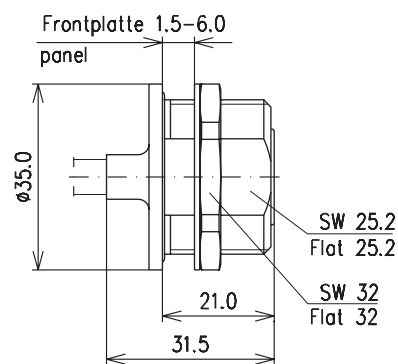

BN 80 77 33