

Distributed by:



**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**


The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 526379

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
FT	47		H	0B3B-0344-03	20APR03

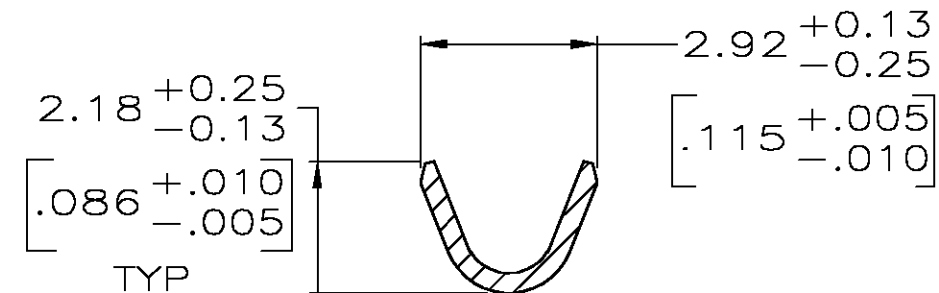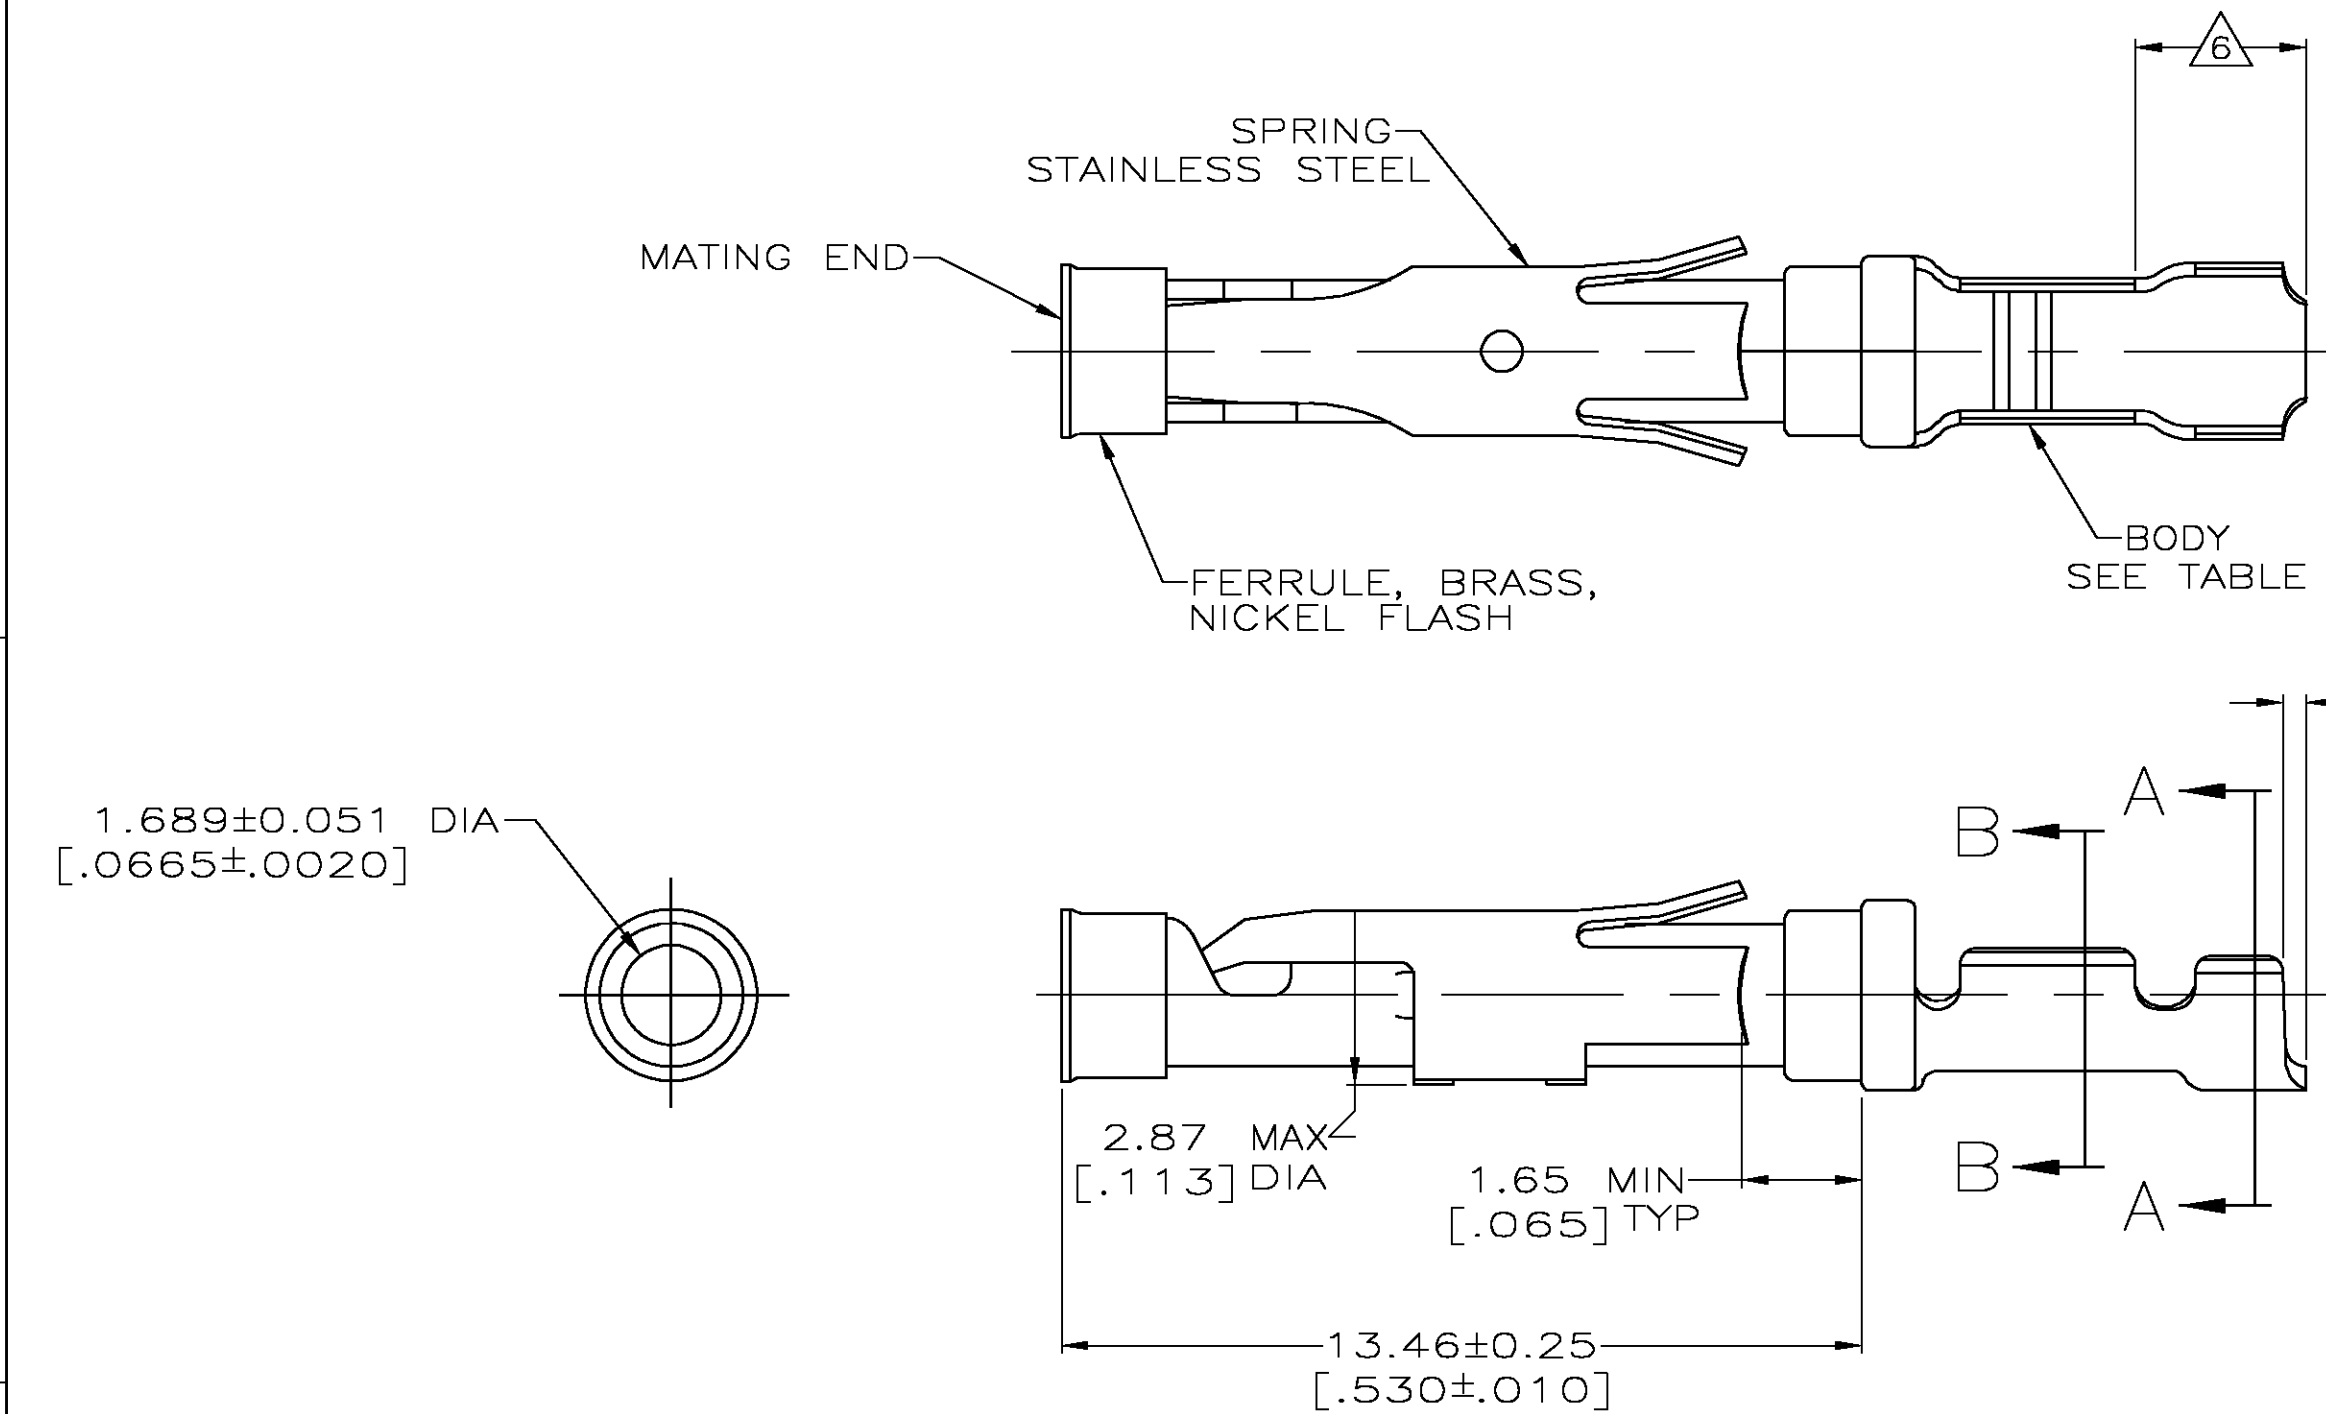

SECTION A-A

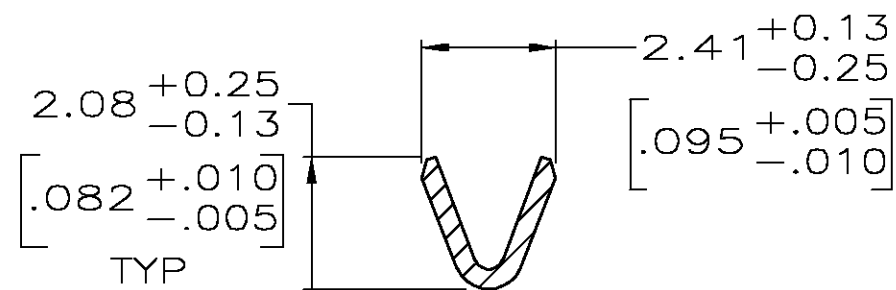

SECTION B-B

1. 0.76  $\mu$ m [0.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [0.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76  $\mu$ m [0.000030] MIN NICKEL PER QQ-N-290.
2. 1.27  $\mu$ m [0.000050] MIN TIN-LEAD PER MIL-T-10727 OVER 0.76  $\mu$ m [0.000030] MIN NICKEL PER QQ-N-290.
3. 0.76  $\mu$ m [0.000030] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [0.200] MIN WITH A UNIFORM GRADIENT TO 0.25  $\mu$ m [0.000010] MIN GOLD PER MIL-G-45204 ON THE REMAINDER OVER 0.76  $\mu$ m [0.000030] NICKEL PER QQ-N-290.
4. 0.38  $\mu$ m [0.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [0.200] MIN WITH GOLD FLASH ON THE REMAINDER OVER 0.76  $\mu$ m [0.000030] MIN NICKEL PER QQ-N-290.
5. 1.27  $\mu$ m [0.000050] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [0.200] MIN WITH GOLD FLASH ON REMAINDER OVER 1.90  $\mu$ m [0.000075] MIN NICKEL PER QQ-N-290.
6. GOLD PLATING NOT REQUIRED IN THIS AREA.
7. WIRE RANGE 24-20 AWG. INSULATION RANGE 1.02 [0.040]-2.03 [0.080].
8. 0.38  $\mu$ m [0.000015] MIN GOLD PER MIL-G-45204 ON MATING END FOR A LENGTH OF 5.08 [0.200] MIN, 1.27  $\mu$ m [0.000050] MIN TIN-LEAD PER MIL-T-10727 FOR A LENGTH OF 5.69 [0.224] MIN ON OPPOSITE END, BOTH OVER 1.27  $\mu$ m [0.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT.
9. 1.27  $\mu$ m [0.000050] MIN TIN PER MIL-T-10727 OVER 0.76  $\mu$ m [0.000030] MIN NICKEL PER QQ-N-290.

	SMALL PACK	9	BRASS	1-66105-9	2-66105-0
	STNDARD	9	BRASS	3-66104-0	1-66105-9
	SMALL PACK	1	BRASS	66104-4	1-66105-8
	SMALL PACK	4	BRASS	66104-3	1-66105-7
	SMALL PACK	2	BRASS	66104-2	1-66105-6
	SMALL PACK	3	BRASS	66104-1	1-66105-5
OBSOLETE	STANDARD	8	BRASS	2-66104-6	1-66105-4
OBSOLETE	STANDARD	1	PHOSPHOR BRONZE	2-66104-3	1-66105-3
OBSOLETE	STANDARD	2	PHOSPHOR BRONZE	2-66104-2	1-66105-2
OBSOLETE	STANDARD	5	BRASS	1-66104-6	1-66105-0
	STANDARD	1	BRASS	66104-4	66105-4
	STANDARD	4	BRASS	66104-3	66105-3
	STANDARD	2	BRASS	66104-2	66105-2
	STANDARD	3	BRASS	66104-1	66105-1
	PACKAGING TYPE	BODY FINISH	BODY MATERIAL	STRIP P/N REF	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	06/01/92	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK	6-11-92	City, State, Zip	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		W	LENKER	NAME	
0 PLC ± -		APVD	G. STEINHAUER	SOCKET ASSEMBLY, LOOSE PIECE, TYPE III+	
1 PLC ± -		PRODUCT SPEC		-	
2 PLC ± 0.13 [0.005]		APPLICATION SPEC		-	
3 PLC ± -		WEIGHT	-	SIZE	CAGE CODE
4 PLC ± -		CUSTOMER DRAWING		A2	00779
ANGLES ± -		SCALE	8:1	DRAWING NO	REV
FINISH		SHEET	1	OF	1
SEE CALLOUTS		REV	H		