




Shenzhen Jiexing Weiye Electronics Co., Ltd.

SHENZHEN JIEXING WEIYE ELECTRONIC CO.,LTD

Circuit Breakers for Equipment

88

88 yyy

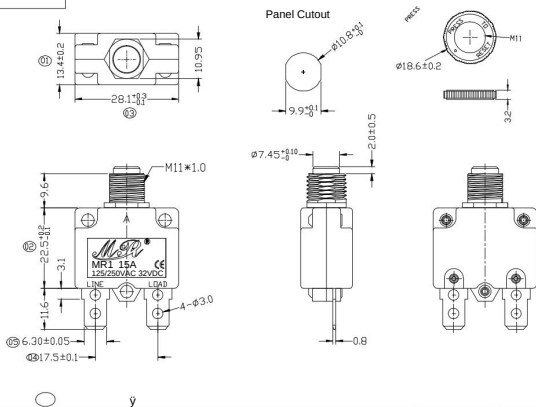Check it out
yyyOUTyyy

	125/250VAC
	32VDC
	15A
yy 1000A	500VAC 5s ⁺
	1500VAC/min,
	yy

DIMENSION	TOLERANCE	
	0.3	
10 10TOLERANCE UNIT:MM		
PART NO.	MR1-MPT-10	
REV	A/0	DATE
		2016.9.8


ambient temperature		-10	0	5	15	25	40	50	60
Multiplication factor	5A	*1.23	*1.16	*1.12	*1.07	*1.0	*0.92	*0.84	*0.77
	5A	*1.15	*1.09	*1.06	*1.03	*1.0	*0.94	*0.90	*0.88

The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping. Please multiply the current breaker current ratings by the derating factor shown below.

Example
Normal Continuous current = 15A
Ambient temperature = 45
Multiplication Factor = 0.85
Recommended Rating = 15A/0.85=17.6A
Select the nearest Rating = 18A

-10 to 60

Trip Time Curves

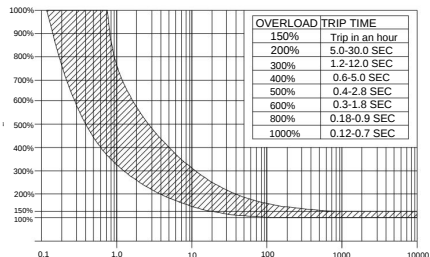

Time in Seconds
Trip Curves Are Specified of 25

CE	9458732 3A-30A 125/250		

y: Alex

201698