
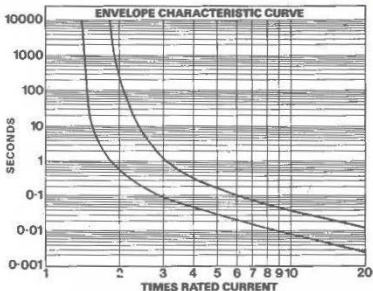


## Low voltage alarm and indicating lug mounting fuselink Phenolic mold body

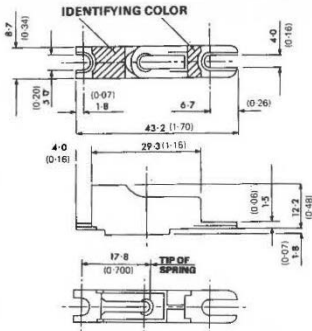

With acknowledgement to Kenneth E. Beswick Ltd.

%RATED CURRENT	PERFORMANCE DATA					
	100		150		220	
	MIN	MAX	MIN	MAX	MIN	MAX
PERFORMANCE	1000 HRS	-	10 SEC	-	-	30 SEC

### Standard Fuses

### Cat. No

.25A	Brown	4342.0
.5A	lt. French Blue	4343.0
1A	Lemon	4344.0
1.5A	Red	4345.0
2A	Violet	4346.0
3A	Black	4347.0
4A	Grey	4348.0
5A	Green	4349.0
6A	White	4350.0

### Non-standard Fuses

(coded to TDP44 and rating otherwise to PO specification)

### Standard Fuses

### Cat. No

.75A	Salmon Pink	4351.0
2.5A	Orange	4352.0
3.5A	Blue & Black	4353.0
4.5A	Dark Brown	4354.0
9A	Orange & White	4355.0