


Technical data


Cylindrical fuse-link

Technical data		
Rated voltage	400 V AC, 500 V AC, 690 V AC	
Rated current	CH 8	1-25 A/400 V
	CH 10	0,5-16 A/500 V, 20-32 A/400 V
	CH 14	2-25 A/690 V, 32-50 A/500 V
	CH 22	16-40 A/690 V (50 A/690 V aM), 50-100 A/500 V
Rated frequency	50 Hz	
Rated breaking capacity	CH 8	50 kA
	CH 10	100 kA
	CH 14	2-25 A/80 kA, 32-50 A/120 kA
	CH 22	16-40 A/80 kA (50 A/80 kA aM), 50-100 A/120 kA
Characteristics	gG, aM	
Body material	ceramic	
Material of contact parts	CuZn28, gal.Ag	

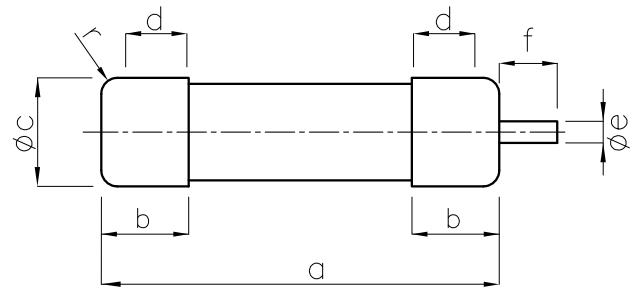

With striker pin

size	e	f
14 x 51	3,8	7,5
22 x 58	3,8	7,5

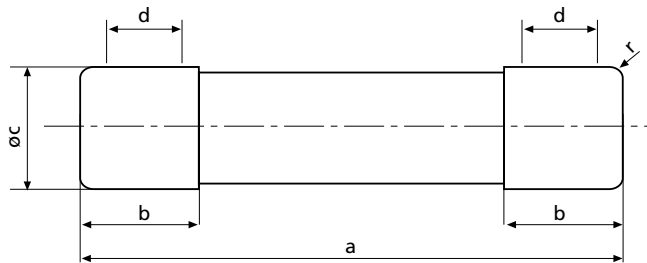

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0±0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0±0,1	16,2	22,2±0,1	11	±1

Time current characteristics
I/t, gG
CH8

