



## Type D "Bottle" Fuse

**Amp Ratings:** 2 to 100 Amps

**Voltage Ratings:** 500Vac

**Interrupting Rating:** 100kA

**Agency Approvals:**

"D" type fuses complying with DIN 49360 (time lag) 2 and DIN 49515, operating class gG/gL

| Catalog Number | Dimension "D" | Ampere Rating | Color Code | Figure Number |
|----------------|---------------|---------------|------------|---------------|
| 2D16           | 6             | 2             | Pink       | 1             |
| 4D16           | 6             | 4             | Brown      |               |
| 6D16           | 6             | 6             | Green      |               |
| 10D16          | 8             | 10            | Red        |               |
| 16D16          | 10            | 16            | Gray       |               |
| 20D16          | 12            | 20            | Blue       |               |
| 25D16          | 14            | 25            | Yellow     |               |
| 2D27           | 6             | 2             | Pink       | 2             |
| 4D27           | 6             | 4             | Brown      |               |
| 6D27           | 6             | 6             | Green      |               |
| 10D27          | 8             | 10            | Red        |               |
| 16D27          | 10            | 16            | Gray       |               |
| 20D27          | 12            | 20            | Blue       |               |
| 25D27          | 14            | 25            | Yellow     |               |
| 35D33          | 16            | 35            | Black      | 3             |
| 50D33          | 18            | 50            | White      |               |
| 63D33          | 20            | 63            | Copper     |               |
| 80D125         | 5             | 80            | Silver     | 4             |
| 100D125        | 7             | 100           | Red        |               |

Additional fuse links: Quick acting fuse links in body size D16, D27, D33 and D125 rated 2-100 amps. Reference number with suffix "Q", i.e. 10D27Q. Voltage rating 500 volts ultra fast-acting fuse links in body size D27, D33, and D125 rated 6-100 amps. Reference number with suffix "R", i.e., 10D27R.

**Notes:** (a) Gauge rings and keys can also be supplied.

### Dimensions - mm

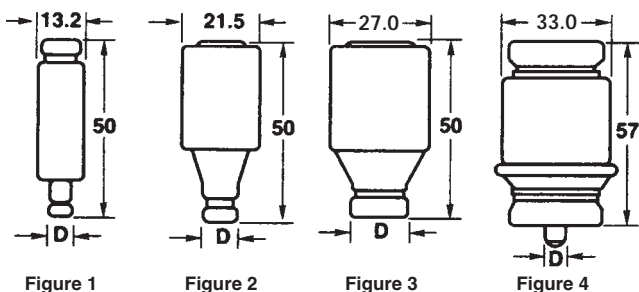


Figure 1

Figure 2

Figure 3

Figure 4