


# BULGIN

## Fuse Holders, Panel Mounting,

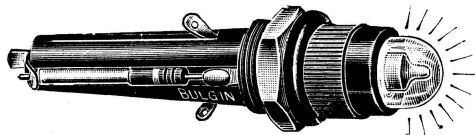

**List No: D.F.826/V.**  
for  $1\frac{1}{4}" \times \frac{1}{4}"$   $\varnothing$  Fuses  
**U.K. Patent Number 930330**  
**U.S.A. Patent No. 1,132,224**


### S.P. Neon Fuse-Holder D.F.826

*"It glows when it Blows"*  
This unique model has a neon in front lens-cover. On mains (100/125V or 200/250V), "Neon glows" if Fuse blows saving time and money. **Patented.** Users find it invaluable. (Also to quantity order, models to stay alight until fuse is blown).



**List No. F.315,**  
for  $1\frac{1}{4}" \times \frac{1}{4}"$   $\varnothing$  Fuses

**List No. F.316,**  
for  $1" \times \frac{1}{4}"$   $\varnothing$  Fuses




**List No: F.316/S**  
for  $1" \times \frac{1}{4}"$   $\varnothing$  Fuses

### Heavy-Duty Fuse Holders F.315, F.316 and F.316/S.

All moulded body with screw in front cover and tags accepting 187 series push-on connectors which we can supply, if requested. Generous current ratings at 13A. 250V. A.C./D.C. and 20A. at 32V.~ and inherently safe design F.316/S identical to F.316 but with an extra shallow fuse retaining cap, which can only be removed with the aid of a screwdriver or coin, thus conferring extra safety. For  $\frac{1}{4}"$   $\varnothing$  Fuse links, lengths as caption-Fuse links, lengths as captioned. Max. working temperature 120°C. (ambient + internal heating). Withstanding 5KV proof. test.

### Flush Fitting Holders F.317 and F.318.

A moulded Fuseholder, 250V. 5 Amp rating, intrinsically safe design, slotted front cap avoids accidental removal of fuse link. Flush fitting with minimum panel projection. **Tags** accepting 187 series Push-On-Tabs.

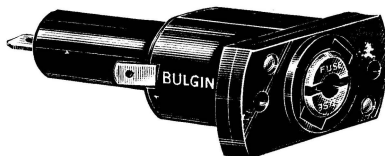

**List No: F.317 for  $1" \times \frac{1}{4}"$   $\varnothing$  Fuses**  
**List No: F.318 for  $1\frac{1}{4}" \times \frac{1}{4}"$   $\varnothing$  Fuses**  
**Patent No. 1,159,999**

### Standard S.P. Panel-Fix Holders F.55, 155, 156.

3 popular types of panel mounting fuse-holder F 55 has metal and S.R.B.P. body with screw-in front cover. F.155-156 have all moulded body, and front-cover fixes by bayonet action.