

## PULLCAP MODULAR FUSE-HOLDERS

## TYPE LPC




The PULLCAP 240/415 V a.c. modular fuse-holders incorporate fuse-links to BS88: Part 1 and BS1361.

Component	Current Rating (A)	Colour	List Reference	Lawson Fuse-Link	Solid Link	
Carrier	5	White	LPC 5 CA WH	LA	SLPC5	
	5	Black	LPC 5 CA BK	LA	SLPC5	
	20	Blue	LPC 20 CA BL	LC	SLPC 20	
	20	Green	LPC 20 CA GN	LC	SLPC 20	
	32	Red	LPC 32 CA RD	LD	SLPC 32	
	32	Black	LPC 32 CA BK	MD	SLPC 32	
Cover Plate	5	White	LPC 5 CP WH	LA		
	5	Black	LPC 5 CP BK	LA		
	20	Blue	LPC 20 CP BL	LC		
	20	Green	LPC 20 CP GN	LC		
	32	Red	LPC 32 CP RD	LD		
	32	Black	LPC 32 CP BK	MD		
Base	32	Black	LPC 00 CP BK	-		
	63		LPC 63 CA BK	ME		
			LPC 32 FC/FC	DIN rail adaptor LPC 32 DA		
			LPC 32 FC/BBC			
			LPC 32 FC/BC			
			LPC 32 BC/BC			
	LPC 32 FC/FCL					
	LPC 32 FCL/FCL					
	63	Black	LPC 63 FC/FC			
	LPC 63 FC/BBC					
	LPC 63 FC/BC					
	LPC 63 BC/BC					
			LPC 63 FCL/FCL			

Note: Individual components are available as fully assembled LPCU units rated at 5, 20, 32 & 63 Amps.

### Dimensional Drawings Type LPCU

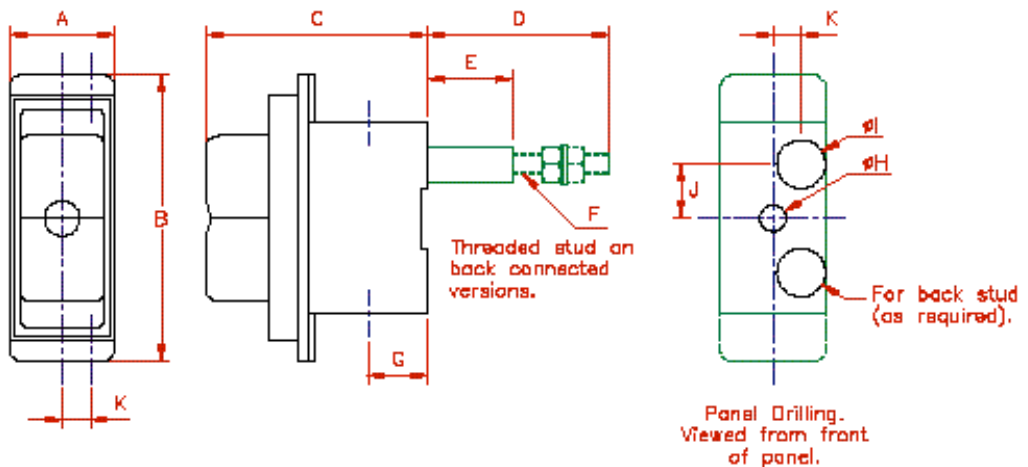

LAWSON REFERENCE	CURRENT RATING (AMPS)	GENERAL DIMENSIONS (mm)										
		A	B	C	D	E	F	G	H	I	J	K
LPCU5	5	23.8	65	44	41	19	28A	13.5	8	11	13	8.35
LPCU20	20	23.8	65	48	41	19	28A	13.5	8	11	13	8.35
LPCU32	32	23.8	65	50	41	19	28A	13.5	8	11	13	8.35
LPCU63	63	35	98.5	72	83.5	22	36W	15	7	20	21.5	8.35