



Essential smartbright Waterproof WT035C

Mounting Instruction/安装说明书


VI.0



$t_a 25^{\circ}\text{C}$


IP65


IK06




IEC 60598


GB 7000






35°C
 -20°C


Type/型号	CCT (K)	Power(W)/功率	Lumen Output (lm) /流明输出	Dimension /尺寸 LxWxH (mm)		Voltage/电压	Frequency/频率		
WT035C LED15/NW PSU GC CFW L600	4000	15	1500	598x35.5x44.5	0.24	220-240V~	50/60Hz		
WT035C LED15/CW PSU GC CFW L600	6500								
WT035C LED30/NW PSU GC CFW L1200	4000	30	3000	1198x35.5x44.5	0.44				
WT035C LED30/CW PSU GC CFW L1200	6500								
WT035C LED37/NW PSU GC CFW L1500	4000	35	3700	1498x35.5x44.5	0.54				
WT035C LED37/CW PSU GC CFW L1500	6500								



44.5
 35.5

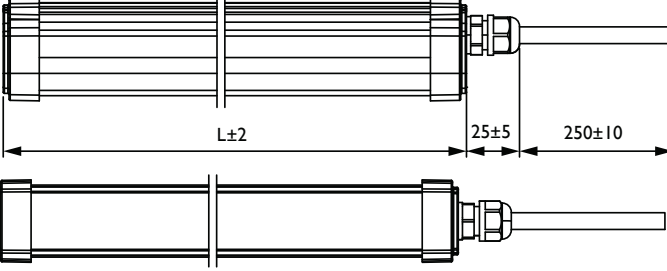

$L\pm 2$
 25 ± 5
 250 ± 10




Unit (mm)

Installation/安装方式


☒ Ceiling Mounting 吸顶安装


☒ Wall Mounting (Horizontal) 墙装(水平)

☒ Suspended Mounting 悬吊安装




Surface Mounting /表面安装






Suspension Mounting /悬吊安装




$\times 2$



Mounting distance/安装距离

Unit (mm)

Type	L600	L1200	L1500
L	200-260	400-600	800-1000




Cable Connection /输入接线

60245 IEC57 2X1.0mm²

Brown / 棕 — L

Blue / 蓝 — N





Please use IP65 or above terminal box (dimension is not smaller than 10x20x25mm), it is not in package.
请使用IP65或以上的接线盒，接线盒尺寸不小于10×20×25mm。（客户自行购买）

Essential smartbright Waterproof WT035C

Mounting Instruction/Petunjuk Instalasi/Hướng dẫn lắp đặt/คู่มือการติดตั้ง / تعليمات التركيب


V1.0




$t_a 25^{\circ}\text{C}$


IP65


IK06


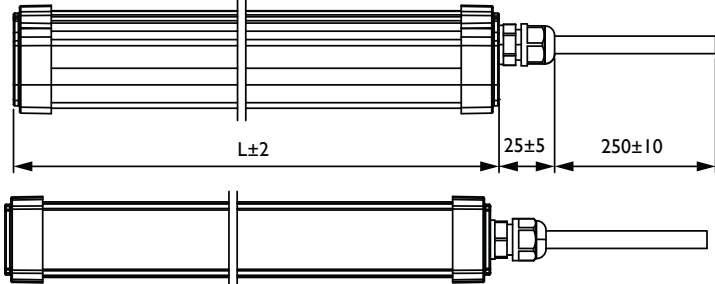



IEC
60598



 35°C
 -20°C

Type/Type/ Loại / رقم النوع /	CCT (K)	Power(W) /Daya/Công suất /กำลังไฟฟ้า/الطاقة	Lumen Output (lm) Lumen keluaran/ Quang thông (lm) /لومن/الإضاءة	Dimension Dimensi/Kích thước /ขนาดคอม/البعاد LxWxH (mm)		Voltage Tegangan /Điện áp /جهد	Frequency Frekuensi /Tần số /التردد		
WT035C LED15/NW PSU GM CFW L600	4000	15	1500	598x35.5x44.5	0.24	220-240V~	50/60Hz		
WT035C LED15/CW PSU GM CFW L600	6500								
WT035C LED30/NW PSU GM CFW L1200	4000	30	3000	1198x35.5x44.5	0.44				
WT035C LED30/CW PSU GM CFW L1200	6500								
WT035C LED37/NW PSU GM CFW L1500	4000	35	3700	1498x35.5x44.5	0.54				
WT035C LED37/CW PSU GM CFW L1500	6500								




Unit (mm)

Installation


☒ Ceiling Mounting

☒ Wall Mounting (Horizontal)


☒ Suspended Mounting



Surface Mounting




Suspension Mounting



Mounting distance

Unit (mm)

Type	L600	L1200	L1500
L	200-260	400-600	800-1000




Cable Connection

60245 IEC57 2X1.0mm²

Brown — L

Blue — N



Please use IP65 or above terminal box (dimension is not smaller than 10x20x25mm), it is not in package.