

Thermocouple probes with leads and connectors



MTCK probes



Type K thermocouple probes with connectors. Mineral insulated. Isolated junction. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
MTCK-3	Mineral insulated probe with connector. Probe; Diameter; 3mm 310 Stainless steel. Length; 300mm. Temp; Max at probe tip; 1100°C. Connector; Mini plug.	\$62.00
MTCK-4.5	Mineral insulated probe with connector. Probe; Diameter; 4.5mm 310 Stainless steel. Length; 300mm. Temp; Max at probe tip; 1100°C. Connector; Standard plug.	\$73.00
MTCK-6	Mineral insulated probe with connector. Probe; Diameter; 6mm 310 Stainless steel. Length; 300mm. Temp; Max at probe tip; 1100°C. Connector; Standard plug.	\$77.00
Type K thermocouple probes with leads. Mineral insulated. Isolated junction. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
MTLK-4.5	Mineral insulated probe with lead. Probe; Diameter; 4.5mm 310 Stainless steel. Length; 300mm. Temp; Max at probe tip; 1100°C. Lead; 1m 7/0.2 fibreglass cable.	\$69.00
MTLK-6	Mineral insulated probe with lead. Probe; Diameter; 6mm 310 Stainless steel. Length; 300mm. Temp; Max at probe tip; 1100°C. Lead; 75mm solid tails.	\$74.00


Temperature sensor;
Standard calibration in;
Type K
Type J
Type T

Duplex thermocouples.

Probe;
Diameters from 1mm.
Mineral insulated.
Isolated or bonded junctions.
Sheath materials available in;
310 stainless steel
Inconel
Nicrobell

Connectors;
Mini plug
Mini jack
Standard plug
Standard jack
Standard available in high temp.

Cable;
PVC
Silicone
Teflon
Fibreglass

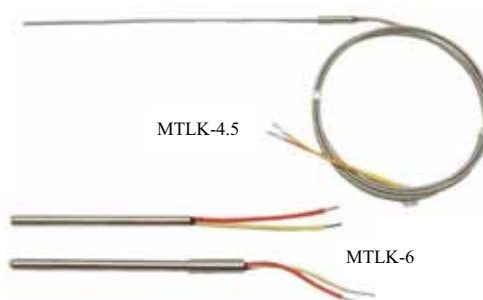

Universal thermocouple probes. Stock probes. Others by request.		
CODE	DESCRIPTION	PRICE
UT-K-xx (C113)	Universal thermocouple probe with bayonet adaptor. Type K Probe; Tip diameter; 4.7mm 310 Stainless steel. Temp; Max at probe tip; 350°C. Adaptor; 1/8 inch BSPT Cable; 4/0.3, fibreglass, SS overbraid. Length; 2.0m 3.5m	\$45.00 \$55.00
UT-J-xx (C113)	Universal thermocouple probe with bayonet adaptor. Type J Probe; Tip diameter; 4.7mm 310 Stainless steel. Temp; Max at probe tip; 350°C. Adaptor; 1/8 inch BSPT Cable; 4/0.3, fibreglass, SS overbraid. Length; 2.0m 3.5m	\$45.00 \$55.00

xx = length

Universal thermocouples



UT-K