

Specification for Electro-Magnetic Audio Transducer

YEC

The Electro-magnetic Audio Transducer including all material and solder joints must be free from lead and other restricted substances as per customer requirement.


● Technical terms

Type	HCM1212UX-G
Rated Voltage (V)	12
Operating Voltage (V)	9~15
*Rated Current (mA)	Max.30
*Sound Output at 10cm (dB)	Min.83
*Resonant Frequency (KHz)	2.3 ± 0.4
△ Response Time (ms)	Max.50
Operating Temperature (℃)	-40~+85
Storage Temperature (℃)	-40~+85
Weight (g)	2

* Value applying rated voltage (DC)

△ Value applying (Min. operating DC.voltage)

DIMENSIONS Unit:mm

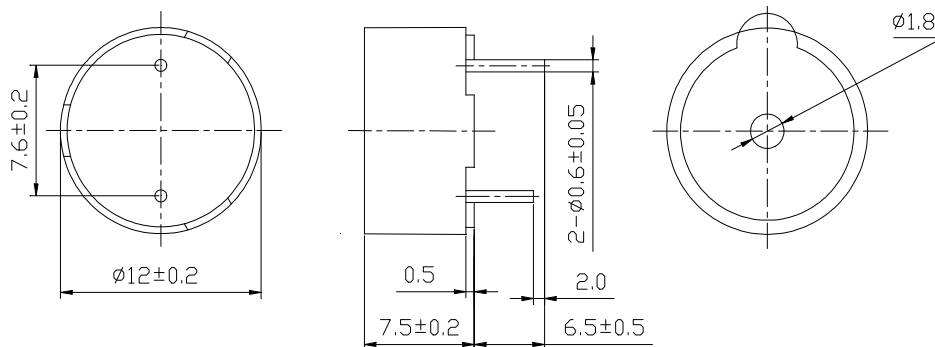

				Date	2001.11.26	Specification for Electro-Magnetic Audio Transducer HCM1212UX-G
				Name	SunXingLong	
					GuHongWei	
					ZhuBingKe	
						011126.3
A						011126.3
Issue	Note	Date	Name			

Specification for Electro-Magnetic Audio Transducer

YEC

Reliability test

ITEM	METHOD OF TEST	STANDARD
Storage in high temp	Storage in +85 °C test box for 96 hours , then expose to the room temperature for 2 hours without applying power .	All specifications must be satisfied in this condition .
Storage in low temp	Storage in -40 °C test box for 96 hours , then expose to the room temperature for 2 hours without applying power .	All specifications must be satisfied in this condition .
Life test in the room temp	Operate continuously for 1000 hours with applying rated voltage .	All specifications must be satisfied in this condition .
Life test in high temp	Operate continuously in +85 °C for 500 hours applying 2V(HCM1201UX);5V(HCM1203UX); 7V(HCM1206UX);15V(HCM1212UX) .	All specifications must be satisfied in this condition .
Life test in low temp	Operate continuously in -40 °C for 500 hours applying 1.4V(HCM1201UX);2V(HCM1203UX); 3V(HCM1206UX);9V(HCM1212UX) .	All specifications must be satisfied in this condition .
Temperature cycle test	Make this test 5 cycles without applying power , then expose to the room temperature for 2 hours .	All specifications must be satisfied in this condition .
Humidity cycle test	Make this test 5 cycles without applying power , then expose to the room temperature for 2 hours .	All specifications must be satisfied in this condition .
Vibration	Make this test for the directions of X , Y and Z for2 hours each(total 6 hours) . To-and-fro sweep times 1 minute .	All specifications must be satisfied in this condition .
Drop test	Drop a buzzer naturally from the height of 1m to the surface 1 mm thick wooden board . Three directions(X , Y &Z) .	All specifications must be satisfied in this condition .
Solderability test	Soldering temperature : 230 °C Heat applying time : 3 sec .	All specifications must be satisfied in this condition .

				Date	2001.11.26	Specification for Electro-Magnetic Audio Transducer HCM 1201UX/1212UX
				Name	SunXingLong	
					GuHongWei	
					ZhuBingKe	
				WEILILAI EADC		011126.3
A						
Issue	Note	Date	Name			Page2/2