

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PREPONT, ILLINOIS

FED. MFR. CODE 91929

ACTUATOR-SWITCH

CATALOG LISTING

JX-53

JX-53

M

DRAWING
NUMBER

ISSUE

5

3

3

REPLACES

RELEASE NO. SR 8642

CHECK

59

24

NOV

59

24

NOV

59

24

NOV

59

24

NOV

59

24

NOV

59

24

NOV

59

24

NOV

59

24

NOV

59




24

NOV

59

24

.19 DIA X .09 WIDE CORROSION RESISTANT
STEEL ROLLER, TYPE 316 (CONCENTRICITY .003 TIR)

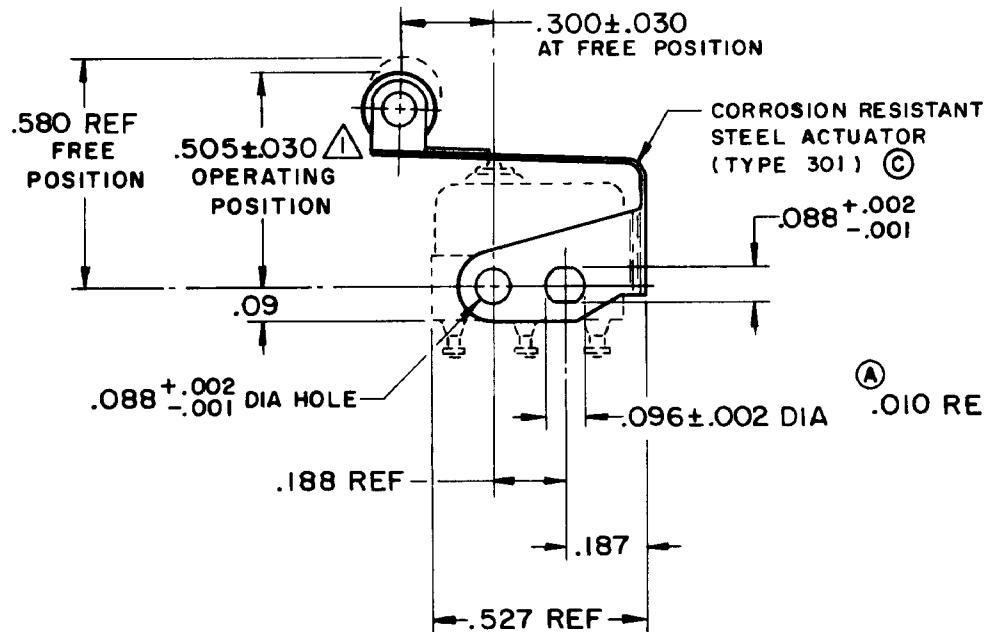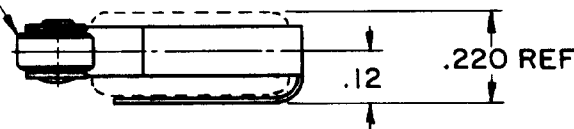

DOTTED LINES
INDICATE BASIC
SWITCH IN PLACE

NOTE -



SLIGHT ROTATION BETWEEN BASIC AND ACTUATOR MAY BE NECESSARY TO OBTAIN
OPERATING POSITION, BASED ON USING NO. 2-56 MACHINE SCREWS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS WITH ISX-T BASIC SWITCH INSTALLED

OPERATING FORCE ----- 6 OZ MAX
RELEASE FORCE ----- 2 OZ MIN
DIFFERENTIAL TRAVEL ----- .025 MAX
OVERTRAVEL ----- .015 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

BREAK DISTANCE

SCALE 2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.000
TWO PLACE (.00) ±.010
THREE PLACE (.000) ±.000
ANGLES ±

WEIGHT

FO-80378

DRAWN

O M W

23 NOV

59

CHECK

6 C H

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59

CHECK

24 NOV

59