


Mounting Hardware and Accessories

For Omni and Yagi Antennas


Pipe Mounts



DB365-OS

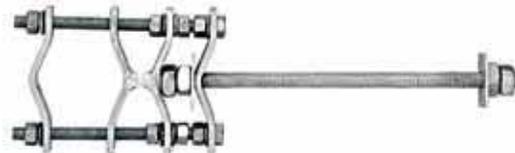

DB365W

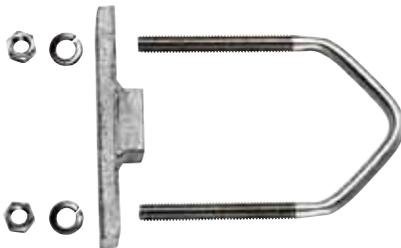

11653

DB365-OS Mounting Clamp Kits

DB365-OS mounting clamp kit includes two clamps that mount antennas to round members from 1.25 to 3.5 in (31.8 to 89 mm) OD or angle members to 3 in (76 mm).

Net weight, lb (kg) 7 (3.18)
Shipping weight, lb (kg) 8 (3.63)

Part Number	Round in (mm)	Angle, 90° in (mm)	Angle, 60° in (mm)	Net Wt. lb (kg)	Shipping Wt. lb (kg)
DB365-SP5	5 (127)	3.54 (89.9)	4.33 (109.9)	14 (6.36)	15 (6.8)
DB365-SP7	7 (177.8)	4.95 (125.7)	6.06 (153.9)	16 (7.27)	16 (7.27)
DB365-SP9	9 (228.6)	6.36 (161.54)	7.79 (197.8)	17 (7.73)	18 (8.18)

DB365W Mounting Clamps

For mounting antennas to a wood pole or masonry wall up to 14 in (355.6 mm) thickness; 0.625 in (15.88 mm) diameter hole required. Clamp jaws fit round members from 1.25 to 2.75 in (31.8 to 69.85 mm) OD galvanized steel. Two clamps supplied.

Net weight, lb (kg) 10 (4.54)
Shipping weight, lb (kg) 12 (5.45)

V-Bolt Mounting Kits

V-bolt mounting clamp kits include stainless steel V-bolts, nuts and washers, and galvanized steel back straps. Set of two.

Part Number	Round in (mm)	Angle, 90° in (mm)	Angle, 60° in (mm)	Net Wt. lb (kg)	Shipping Wt. lb (kg)
11653	3 (76.2)	2 (50.8)	2.6 (66.0)	2 (0.91)	3 (1.36)
11653-4-IN	4 (101.6)	2.8 (71.1)	3.46 (87.8)	2 (0.91)	3 (1.36)
11653-6-IN	6 (154.4)	4.24 (107.7)	5.2 (132.0)	4 (1.82)	5 (2.27)
11653-9-IN	9 (228.6)	6.36 (161.5)	7.79 (197.8)	5 (2.27)	6 (2.73)

Mounting Hardware and Accessories

For Omni and Yagi Antennas

Pipe Mounts

DB370 Mounting Clamp Kit

This is the same as DB365-OS except center straps are not welded. Includes four straps per clamp for spacing adjustment; galvanized steel, set of two.

Net weight, lb (kg)	7 (3.18)
Shipping weight, lb (kg)	8 (3.63)

DB375 Mounting Clamps

Used to mount horizontal members to vertical members—round from 1.25 to 3 in (31.8 to 76.2 mm) each piece. Set of two. Use DB375-SP5 for round tower members measuring 5 inches in diameter.

ASP617 Universal Crossover Clamp

Plate is 0.25 in (6.4 mm) galvanized steel. U-bolts are supplied to secure any combination of two intersecting pipes from 1 to 2.875 in (25.4 to 73 mm) OD. Accommodates up to 2.5 in (63.5 mm) angle iron or 4 in (101.6 mm) OD tower legs with up to a 2.875 in (73 mm) OD intersecting cross pipe. ASP617 can be combined with ASPA320 mounting clamp to accommodate antennas with vertical parallel mounting members. Shipping weight 6 lb (2.7 kg).

ASPA320 Mounting Clamp


Mounting clamp for securing antenna to wooden pole, tower leg, or mast from 1 to 2.75 in (27 to 70 mm) diameter. Special feature allows jaws to be rotated 90° to clamp onto horizontal mounting bars. Clamps are gold iridite aluminum alloy. Shipping weight 3 lb (1.7 kg).

ASPR616 Clamp Set

Consists of two clamps for mounting base station antennas to tower or mast. Will mount on structure from 1 to 2.875 in (25.4 to 73 mm) diameter. All parts are galvanized. Shipping weight 6 lb (2.7 kg).



DB375



ASP617



ASPA320



ASPR616