


7901 Series

D-SUB I.D.C. Type

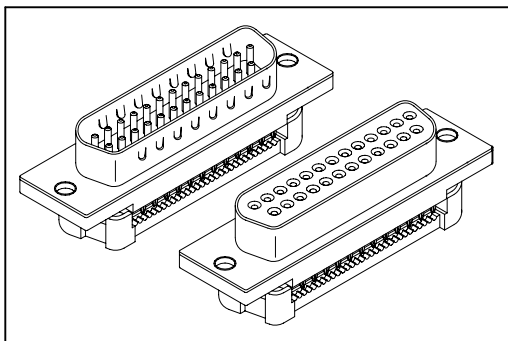

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Shell: Copper Alloy.

Electrical Characteristics:

Current Rating: 1 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000M Ω min.

Contact Resistance: 20m Ω max.


Operating Temperature: -55°C~+105°C.

Features:

* Recommended 1.27mm Flat cable.

* Easy to assembly.

Mates with: 7905, 7906, 7926.

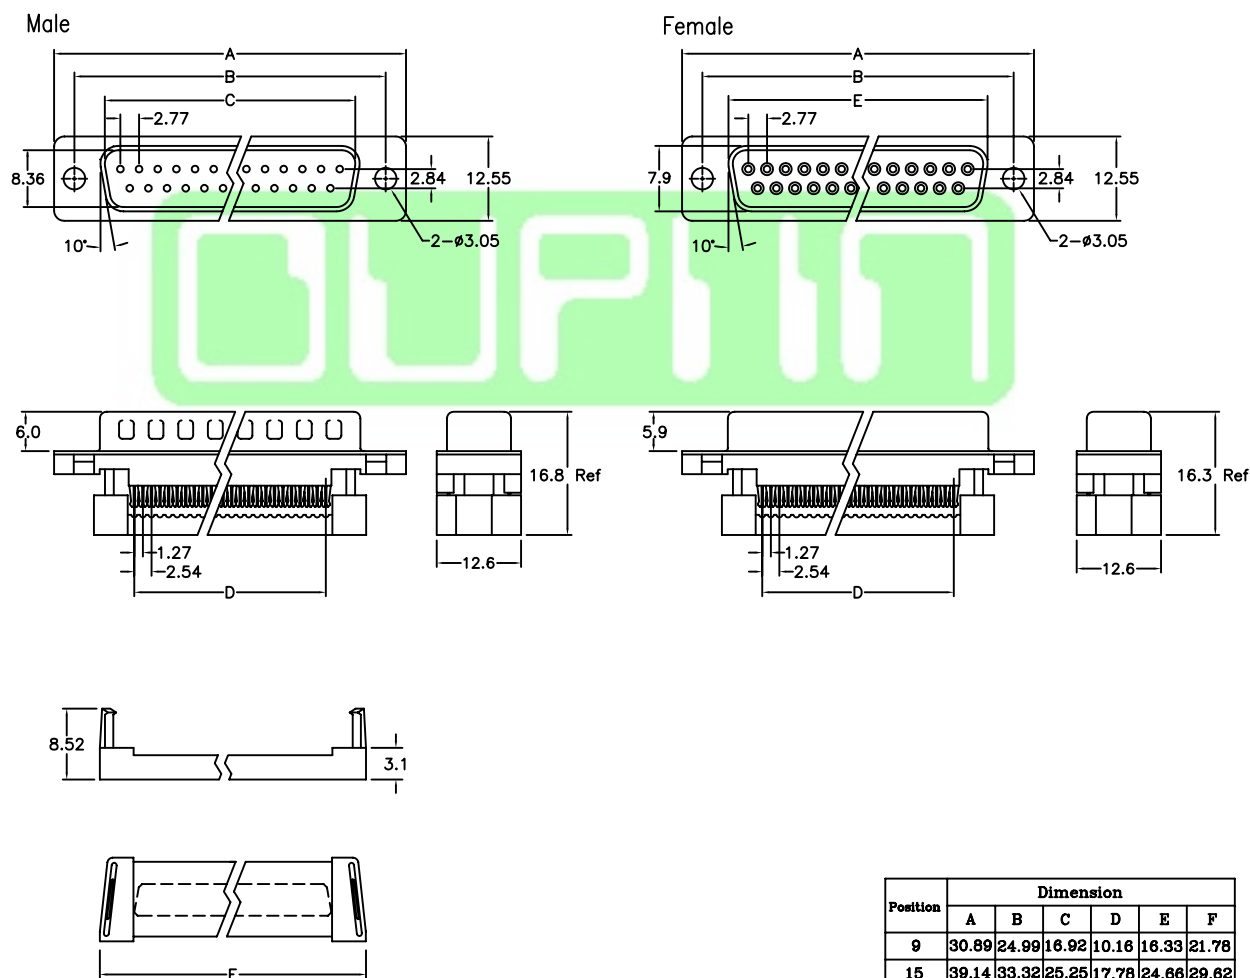

Position	Dimension					
	A	B	C	D	E	F
9	30.89	24.99	16.92	10.16	16.33	21.78
15	39.14	33.32	25.25	17.78	24.66	29.62
25	53.09	47.04	38.96	30.48	38.38	43.35
37	69.39	63.50	55.45	45.72	54.84	59.92

Ordering information

7901-

Series

37

Position

M

M: Male

F: Female

M

M: Metal Shell

P: Plastic

O

N: With 4-40

Thread Insert

O: Without 4-40

Thread Insert

U

U: Blue

B: Black

Y: Gray

C

C: Selective

Gold Plated

00

00: G/F

A

A: Tray

Package