


2-2 CONTROLS AND SWITCHES

2-2-1 SS-5706 Front panel

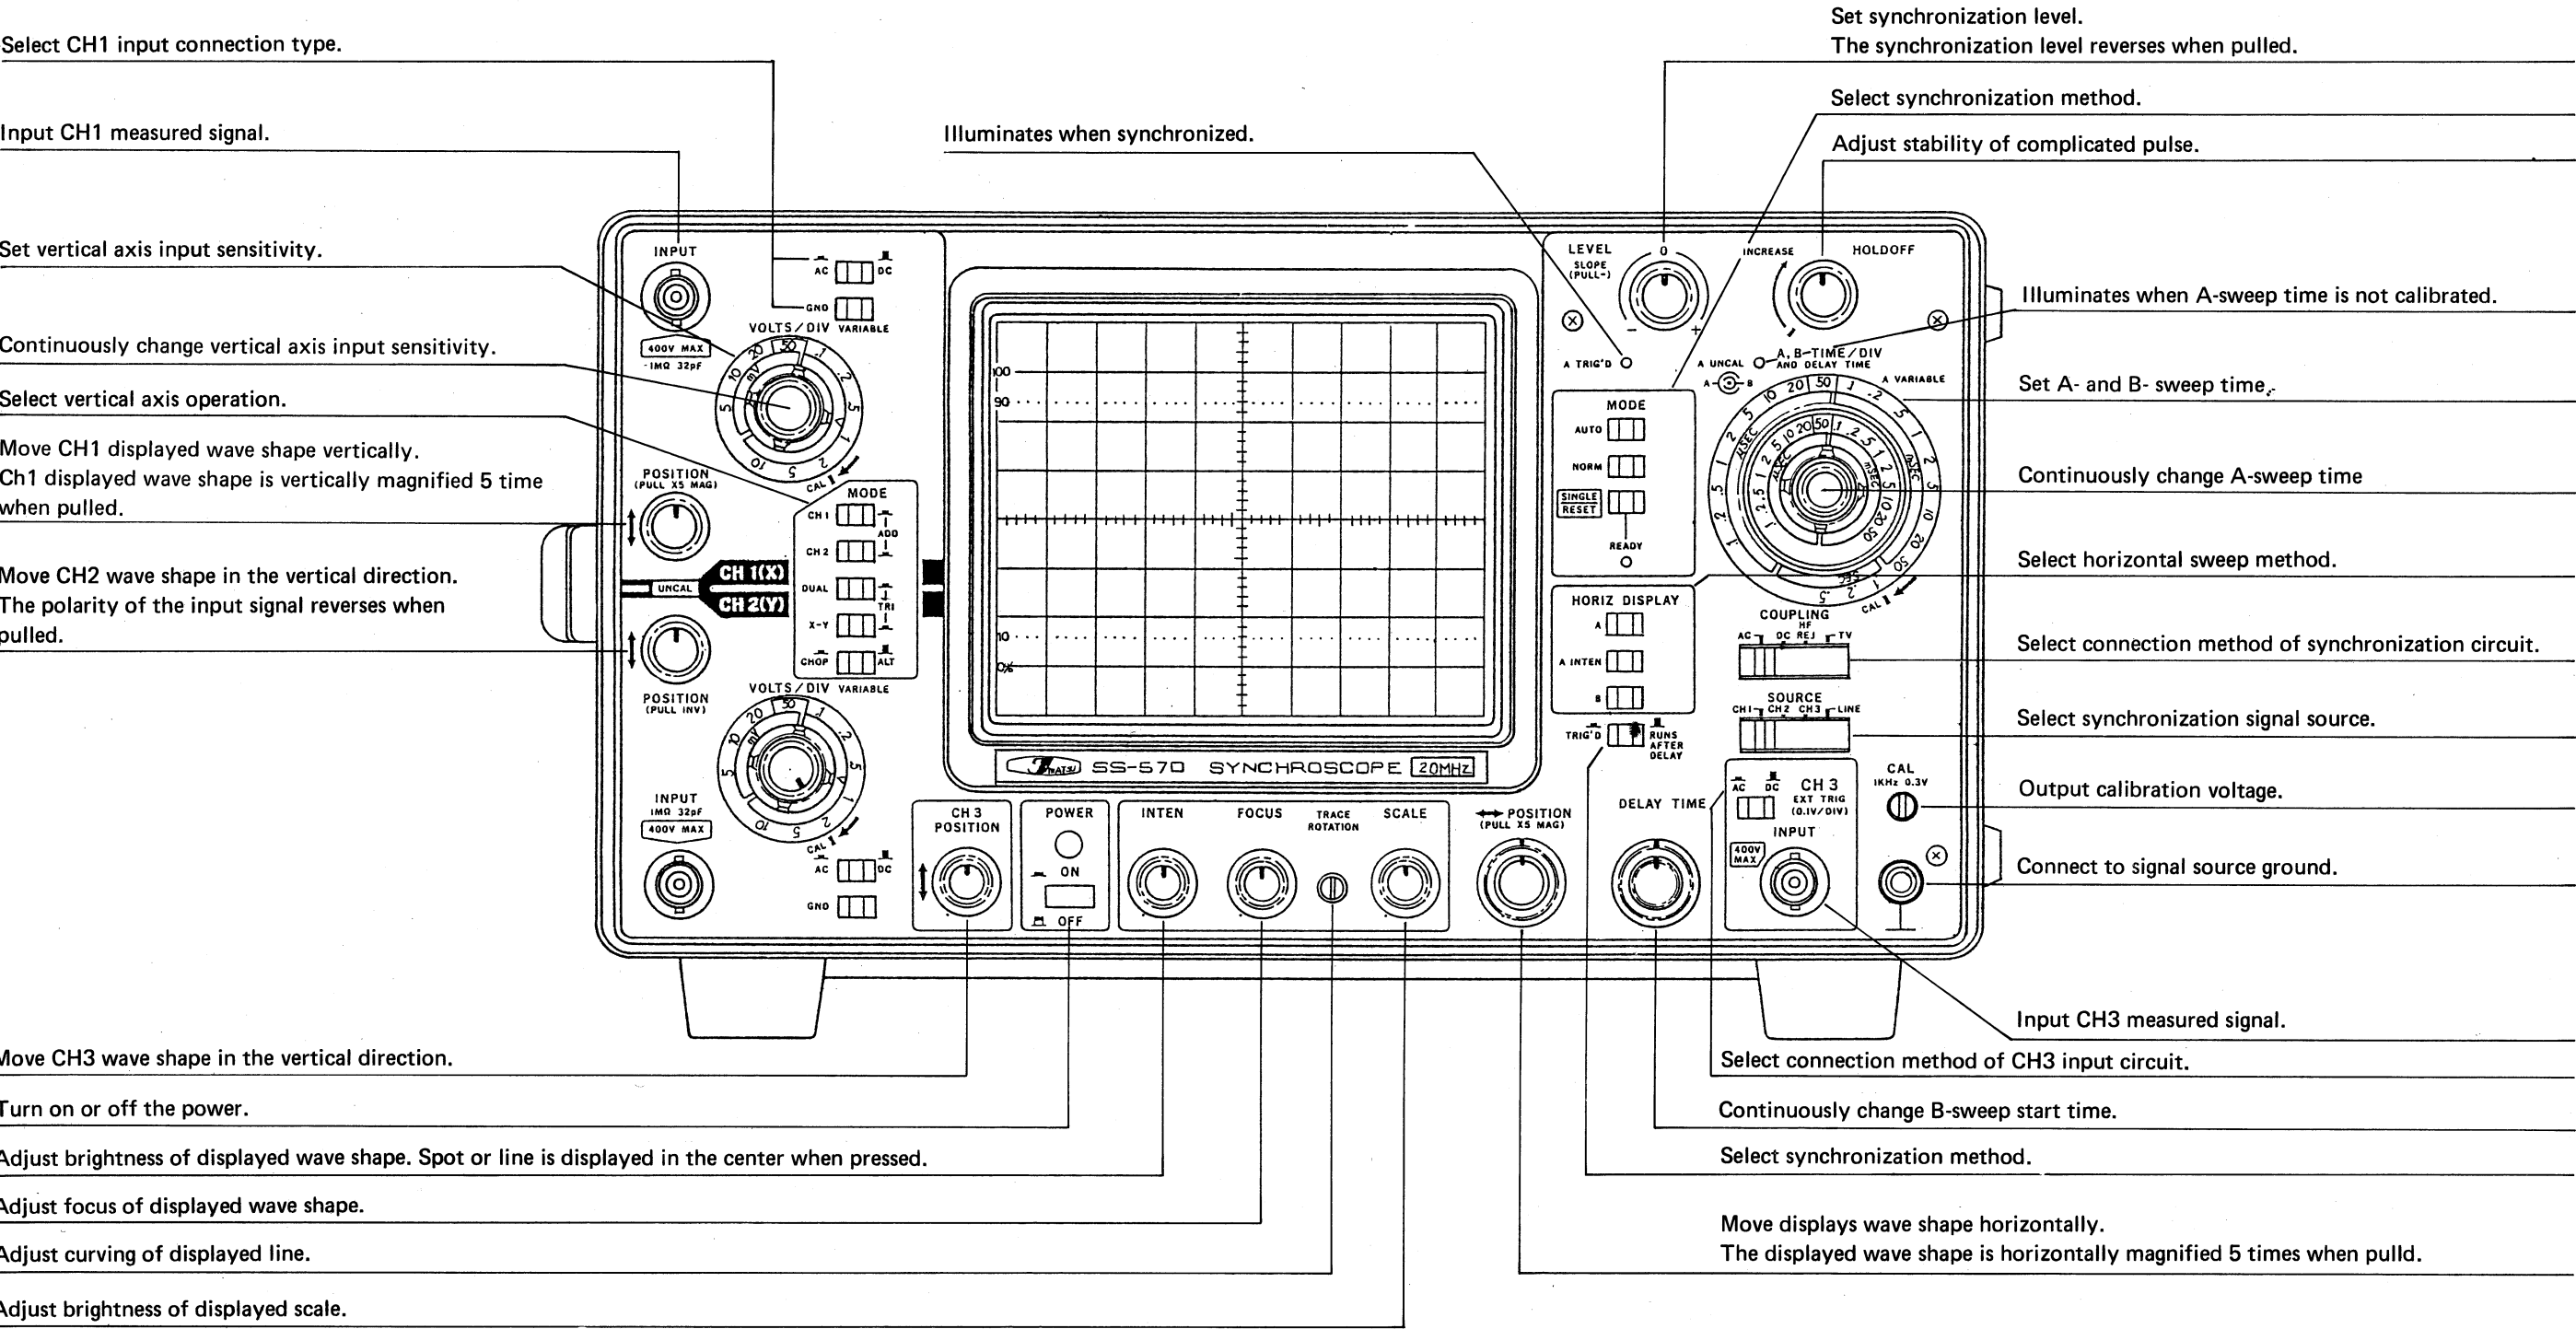


2-2-2 SS-5706 Rear Panel

Obtain calibration current wave shape.

Input signal to apply brightness modulation to displayed wave shape.

Output signal input to CH1 INPUT at 50 mV/div 120% (at terminating resistance of 50 Ω).

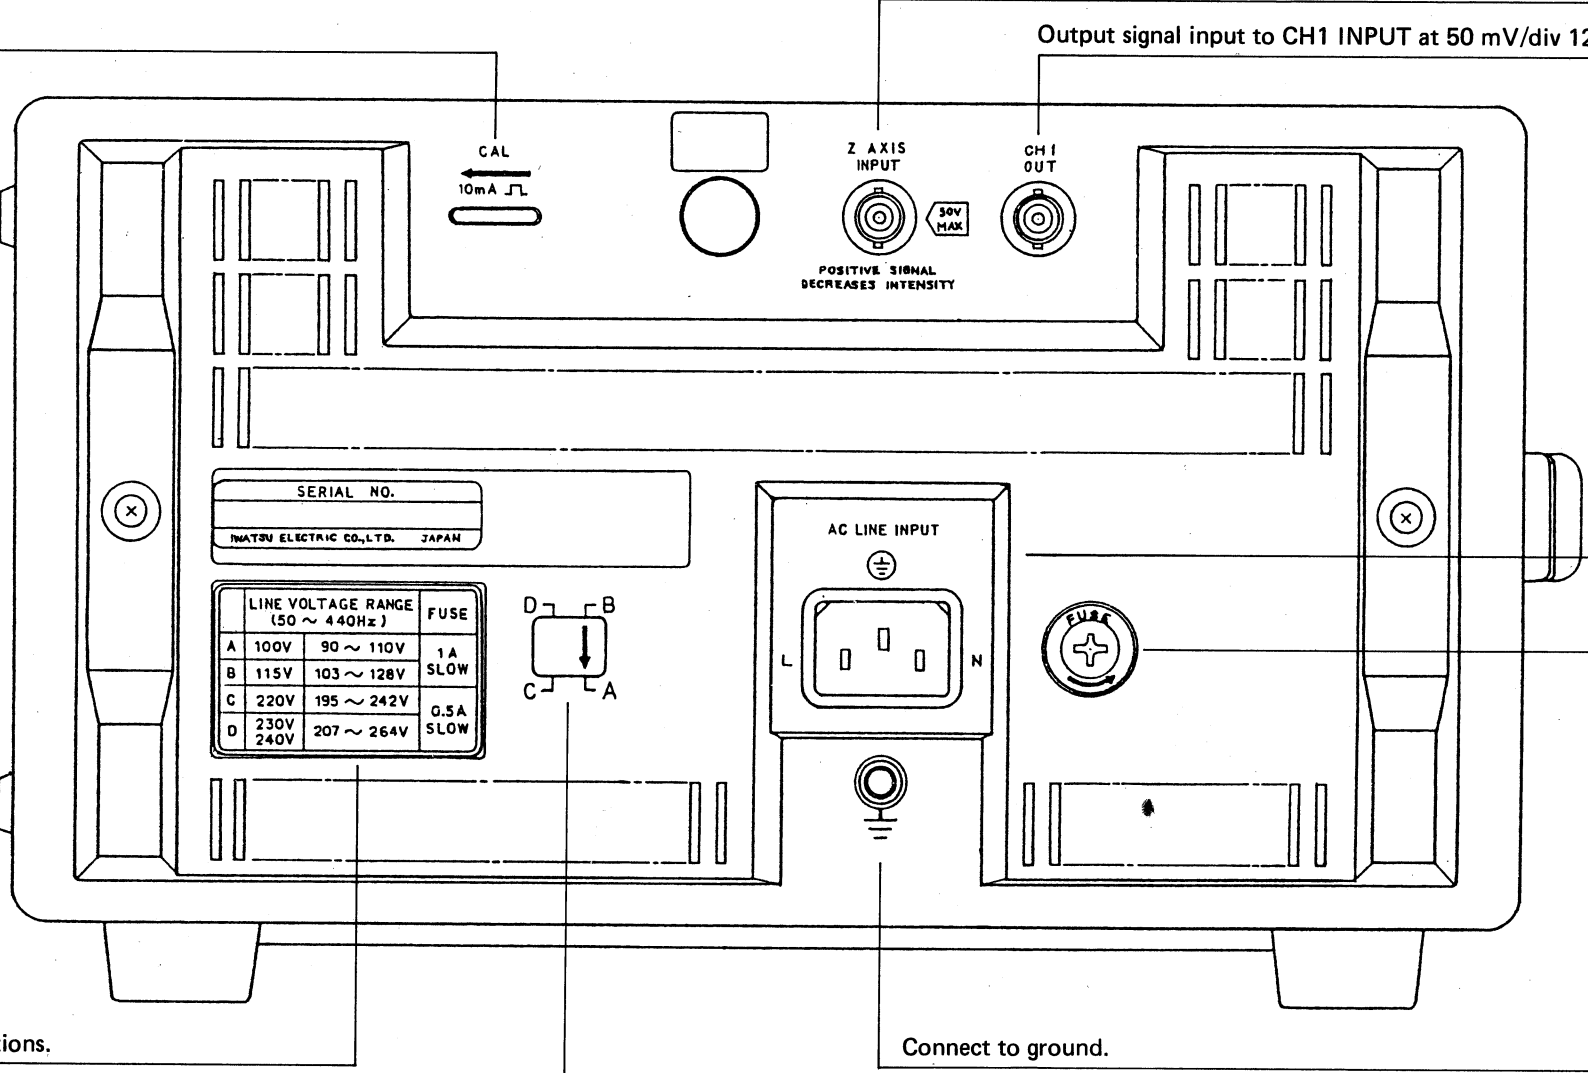

Indicates power voltage, operating range, and fuse specifications.

Select power voltage.