

ZERO SPINDLE COMPONENTS TO CHECK PARTS HELD ON INSIDE DIAMETERS OR FEMALE THREADS

1 888 354 2525

ZERO SPINDLES: Offer By Automation and Metrology inc.

- * AD-012 "M" = 2.187"
- * AD-013 "M" = 2.937"
- * AD-014 "M" = 3.875"
- * AD-015 "M" = 5.250"
- * WITH CENTRALIZING COLLAR
- * WITH SPINDLE LOCK
- * SPINDLE CAN BE MOTORIZED

TORK-LOK ARBORS

- WITH EXPANDABLE COLLETS
- * SPLINE CUT COLLETS

PUSH ARBORS


- * DIAPHRAGM
- * DUAL FLEX
- * THREAD CUT
- * SPLINE CUT

CHUCKS

- * 3 JAW OR 4 JAW CHUCKS
- * 3.5 TO 8.0 " SCROLL CHUCK
- * INTERNAL / EXTERNAL JAWS
- * SPLIT THREAD RINGS
- * FULL CIRCLE WELDED JAWS

OFF-LEAD THREAD CHUCK

- * FEMALE THREADS
- * METRIC AND INCH

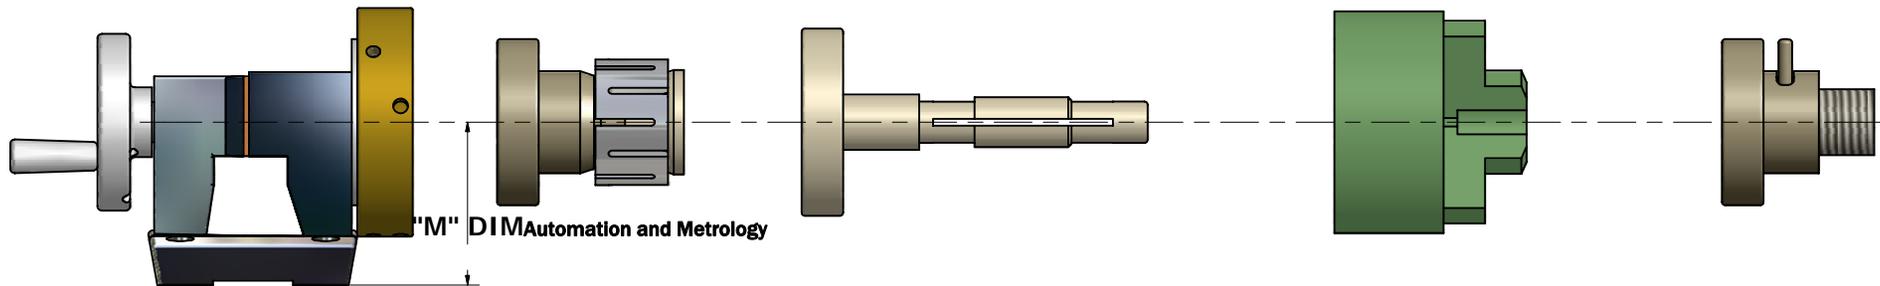

INSIDE DIAMETERS AVAILIABLE	.50 TO 5.0 INCHES	.25 TO 3.00 INCH	1.0 TO 12.0	.18 TO 8.0 INCH THREADS
			USING WELDED JAWS	
MAX PART TOLERANCE	.015 "	.003 TO .004 "	NONE	PER THREAD SPEC
ACCURACY	.0005 " TIR	.0001 " TIR	.0001 " TIR	.0001 " TIR
MODE OF ACTUATION	HANDLE AND DRAW BAR	NONE	CHUCK KEY	ACTUATING HANDLE

ALL GAGING SYSTEMS CAN ACCOMODATE:

- * A SERIES OF POT CHUCKS FOR DIFFERENT PARTS USING ONE SPINDLE
- * ADDITION OF A THREAD CHECKING ATTACHMENT
- * SPECIFIC PART STOPS
- * ETCHED INDEX DIALS
- * ZERO SPINDLE CAN BE MOUNTED FOR VERTICAL LOADING
- * ADDITIONAL COMPONENTS AVAILABLE: MAGNETIC, AIR CHUCKS, ETC..

DRAWN dgloyeski	4/4/2005	TITLE	
CHECKED		ZERO SPINDLE COMPONENTS	
QA		SIZE	DWG NO
MFG		C	5-26-2005 DDG
APPROVED		SCALE	REV
			1
			SHEET 1 OF 1