



## Mitre saw MGS 72/30


- > Stable, grinded continuous support table with turn table on precise bearings
- > Wear resistant and low volume multi v-belt drive
- > Manual saw stroke
- > Standard equipped with saw blade

### Technical information

- > Pivoting range 0°- 45° adjustable to the left and to the right
- > Positive location points at 15°, 30°, and 45°
- > Cutting capacity see cutting diagram
- > Saw blade diameter 380 mm
- > Spindle speed 2800 r.p.m.
- > Power supply 230/400 V, 3~, 50 Hz
- > Power output 3 kW
- > Length 780 mm, width 900 mm, height 815 mm, weight 120 kg

### Optional

- > Machine base
- > Pneumatic material clamping
- > Quick-acting clamping device
- > Length stop and measuring systems
- > Roller conveyors
- > Saw blades
- > Pulsed coolant system
- > High performance cutting fluid

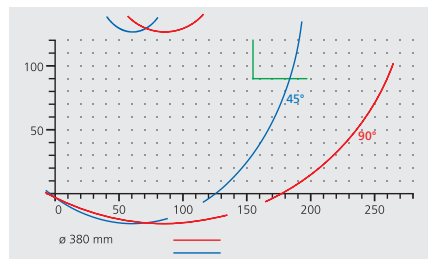


## Mitre saw MGS 72/10

- > See MGS 72/30, however:
- > Machine base
- > Pneumatic material clampings (2x horizontal, 1x vertical)
- > Pulsed coolant system

### Technical information

- > Length 780 mm, width 900 mm, height 1600 mm, weight 210 kg

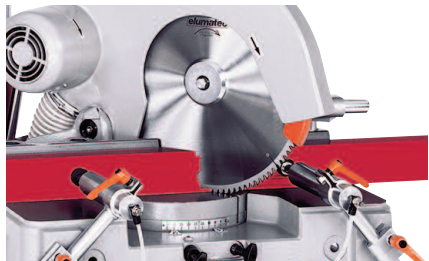

For further information please contact:

- > elumatec GmbH | Pinacher Straße 61 | D 75417 Mühlacker
- > Tel. +49 (0)7041 14-266 | Fax +49 (0)7041 14-282 | sales@elumatec.de

The right to make alterations is reserved



MGS 72/10