




4KA1 Series

Discrete valve: Body porting

Dimensions




4KA110  (File name : Page 538 or Ending 22)

- 2-position single : Grommet lead wire

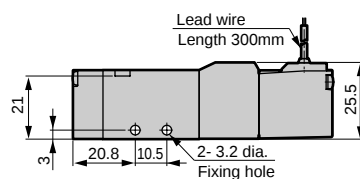
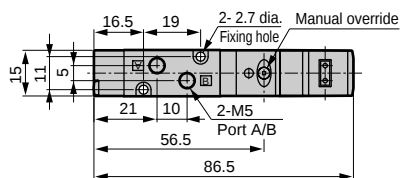


4KA120  (File name : Page 538 or Ending 22)

- 2-position double : Grommet lead wire

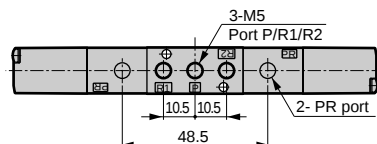
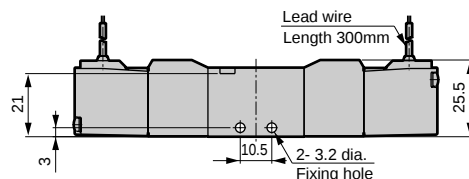
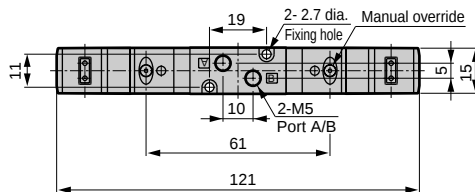


- Mounting plate : (P <2-position single only>)




4KA1³/₄0  (File name : Page 538 or Ending 22)

- 3-position : Grommet lead wire

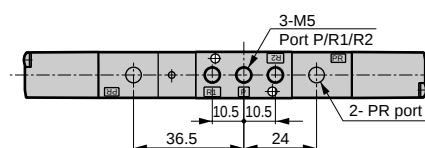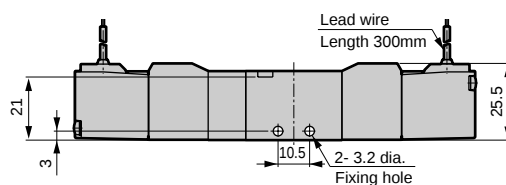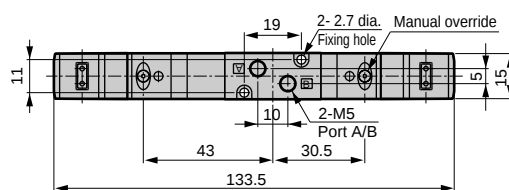



Dimensions

- 4, 6 mm dia. push in joint : (GS4/GS6)

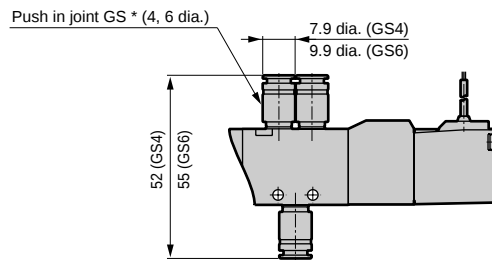


- Small terminal box : (B <No light>/L/L2/LS <Light>)
Without indicator light


Indicator light

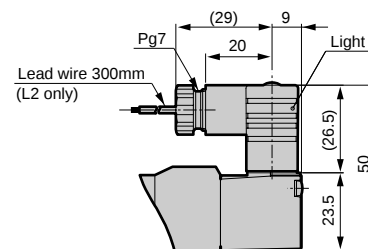

- C-connector : (C/C1/C2/C3)



- D-connector : (D/D1/D2/D3)



4SA/B0

4SA/B1

4GA/B

MN4GA/B

4GA/B
(master)

MN3S0/
MN4S0

4TB

4L2-4/
LMF0

4KA/B

4F

PV5/
CMF

3MA/B0

3PA/B

P/M/B

NP/NAP/
NVP

4F**0E

HMV/
HSV

Uniwire
system

SKH

PCD/
FS/FD

3, 4, 5 port pilot operated valve
Discrete