


Disposable Reservoir System

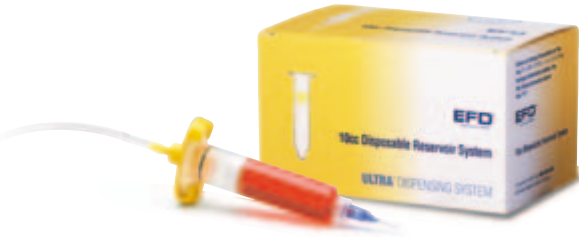

Five sizes, three colors and four types of syringe barrels/pistons make up the Ultra reservoir system for proper dispensing of all kinds of assembly fluids.


For samples, recommendations and immediate customer service:
800-556-3484 www.efd-inc.com/samples

Syringe barrel & piston sets

	MOST FLUIDS			Light Block*	Opaque
	Clear Barrels	Clear Barrels	Clear Barrels	Amber Barrels	Black Barrels
QTY	White Pistons	Blue LV™ Barrier	Red Pistons	White Pistons	White Pistons
3cc	(50) 5109CP-B	5109LV-B	5109CPD-B	5109LBP-B	5109UP-B
5cc	(40) 5110CP-B	n/a	5110CPD-B	5110LBP-B	5110UP-B
10cc	(30) 5111CP-B	5111LV-B	5111CPD-B	5111LBP-B	5111UP-B
30cc	(20) 5112CP-B	n/a	5112CPD-B	5112LBP-B	5112UP-B
55cc	(15) 5113CP-B	n/a	n/a	5113LBP-B	5113UP-B

Reservoirs available in clear for most fluids; translucent amber for UV and light-sensitive materials (*240 to 550 nm); and opaque black to ensure complete light blockage.

Amber barrels also available with red pistons; request the LBP series. LV Barrier sets include tip caps and are designed for cyanoacrylate and very low viscosity fluid dispensing. Red PD pistons are for use with the Ultra 2800 positive displacement system.




Storage end/tip caps

	QTY	End Cap
3cc	(50)	5109EC-B
5cc	(40)	5110EC-B
10cc	(30)	5111EC-B
30cc	(20)	5112EC-B
55cc	(20)	5112EC-B


	QTY	Tip Cap
All sizes	(50)	5113-B

Snap-on end cap for leakproof barrel sealing. Opaque SafetyLok™ tip caps fit all barrel sizes.



Syringe barrels without pistons

		Light Block	Opaque
	Clear Barrels	Amber Barrels	Black Barrels
QTY			
3cc	(50) 5109LL-B	5109LB-B	5109UV-B
5cc	(40) 5110LL-B	5110LB-B	5110UV-B
10cc	(30) 5111LL-B	5111LB-B	5111UV-B
30cc	(20) 5112LL-B	5112LB-B	5112UV-B
55cc	(15) 5113LL-B	5113LB-B	5113UV-B



Note: Order appropriate SmoothFlow pistons separately.

SmoothFlow™ barrel pistons


	QTY	White PE	Blue LV	Orange SPE	Red
3cc	(50)	5109PE-B	5109LVP-B	5109SPE-B	5109PDP-B
5cc	(40)	5110PE-B	n/a	5110SPE-B	5110PDP-B
10cc	(30)	5111PE-B	5111LVP-B	5111SPE-B	5111PDP-B
30cc	(20)	5112PE-B	n/a	5112SPE-B	5112PDP-B
55cc	(20)	5112PE-B	n/a	5112SPE-B	5112PDP-B



Pistons ensure constant dispensing force, prevent drip or ooze, contain hazardous fumes and empty all fluid from barrel.

Adapter assemblies

	Yellow Acetal	Yellow Acetal	Yellow Acetal
	3-ft. Hose	6-ft. Hose	3-ft. Hose/Trap
QTY			
3cc	(1) 1000Y5148	1000Y5148-6	1000Y-5148-F
5cc	(1) 1000Y5149	1000Y5149-6	1000Y-5149-F
10cc	(1) 1000Y5150	1000Y5150-6	1000Y-5150-F
30/55cc	(1) 1000Y5152	1000Y5152-6	1000Y-5152-F



One-piece molded SnapLok™ adapter provides safe attachment of syringe barrel. Includes 5/32" OD flexible polyurethane tubing, Buna N O-ring, quick-connect and safety clip.

Note: Refer to price list for replacement parts.

ESD-safe components

Unique barrel/dispense tip/adaptor systems are manufactured to ensure static electricity is dissipated, offering high conductivity and low carbon black loading. ESD-safe components are ideal for dispensing adhesives and epoxies in electronics, disk drive and SMT production.

Free samples and ESD Test Report:

Call 800-556-3484 or visit www.efd-inc.com/esd

“We have made a **huge leap** from bottleneck to high production.” Pat Welch, Ethicon Endo Surgery

Worldwide sales and service www.efd-inc.com info@efd-inc.com USA 800-556-3484 Fax 401-431-0237