



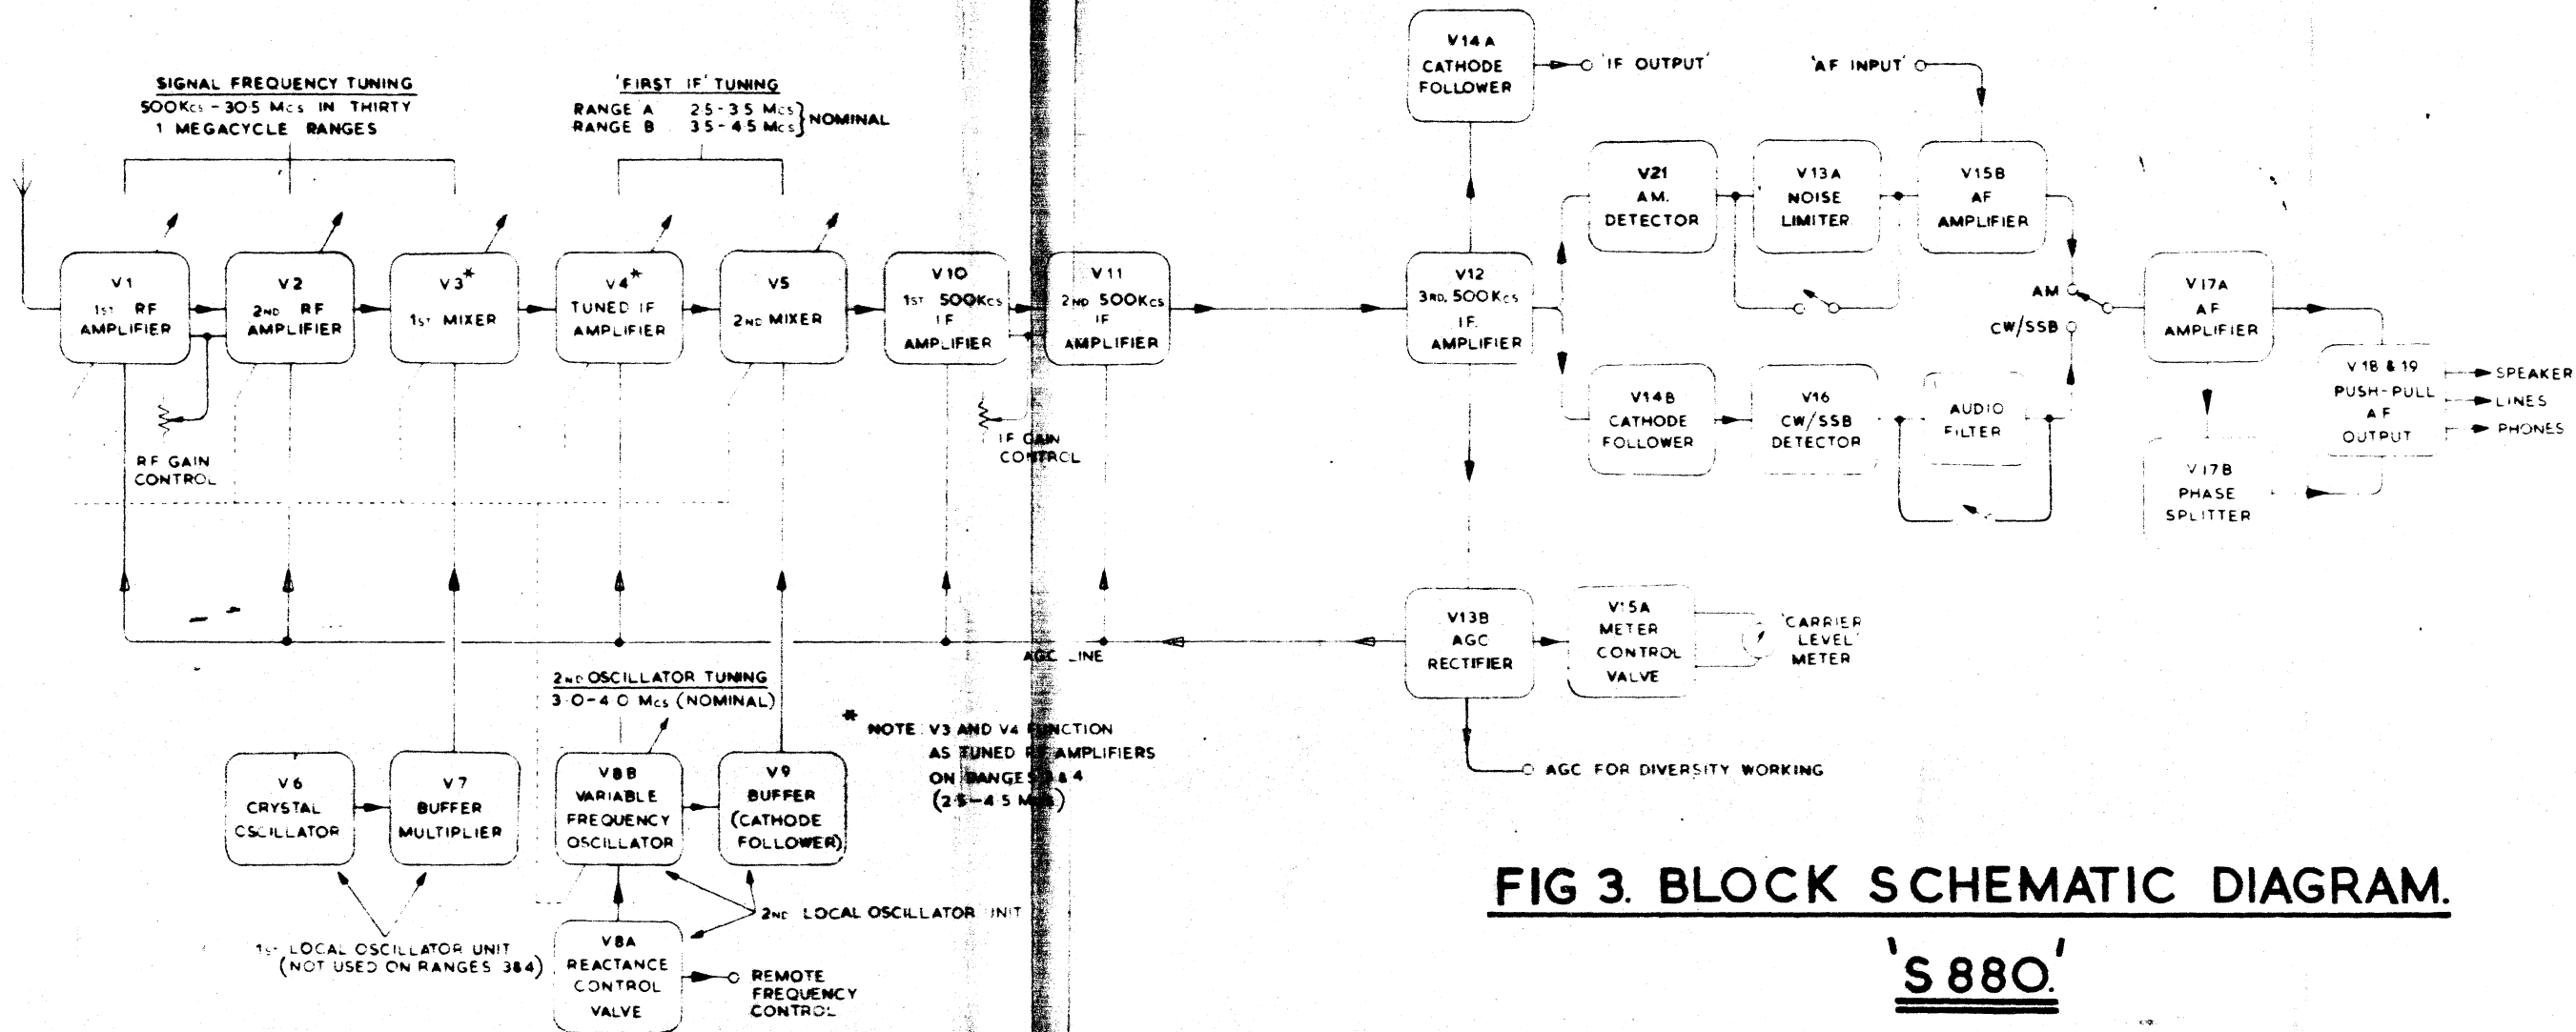


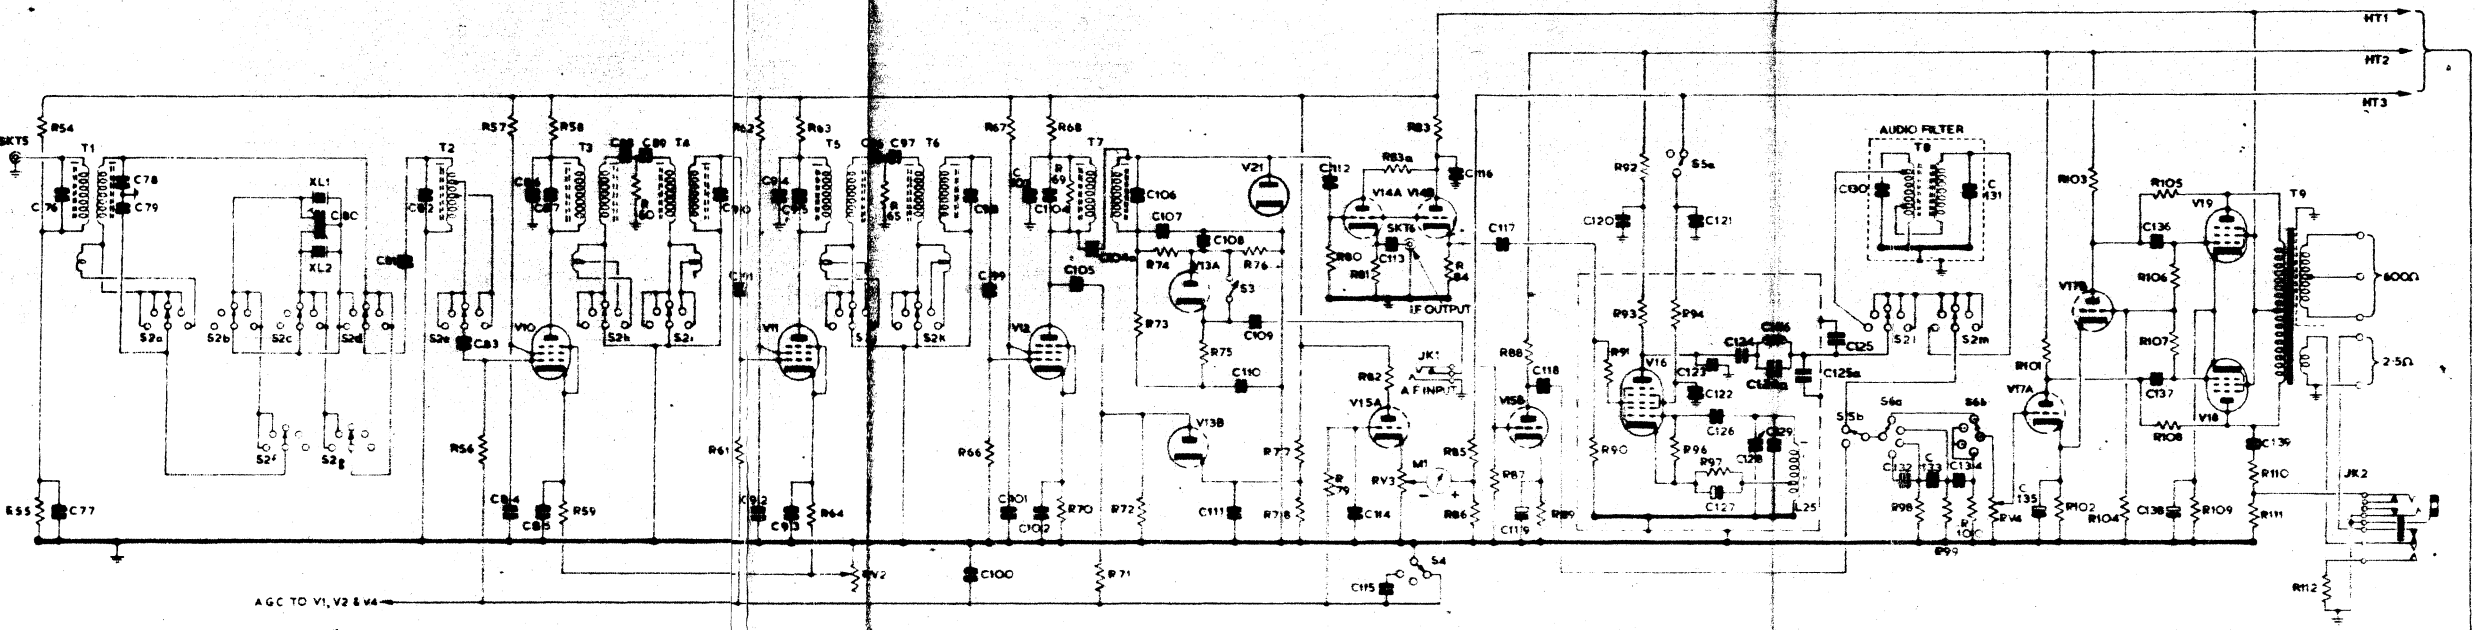


SWITCH FUNCTIONS


CIRCUIT REF	FUNCTION
S2	SELECTIVITY SWITCH
S3	NOISE LIMITER SWITCH
S4	AGC SWITCH
S5	MODE SWITCH
S6	BASS SWITCH
S7	MAINS SWITCH

CONTROL FUNCTIONS


CIRCUIT REF	FUNCTION
RV2	IF GAIN CONTROL
RV3	METER ADJ
RV4	A.F. GAIN CONTROL
RV5	DIAL LAMP BRIGHTNESS
CV28	SFO PITCH

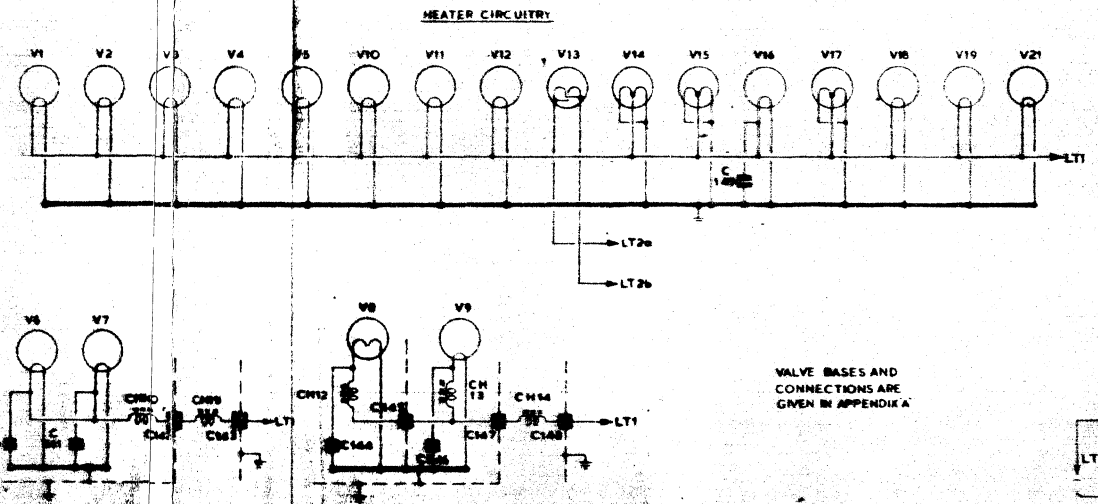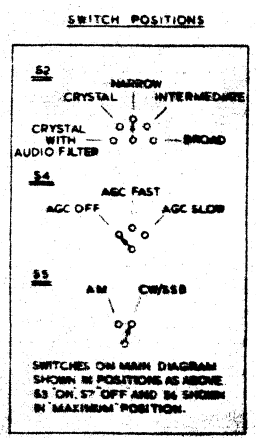

VALVE BASES AND CONNECTIONS ARE GIVEN IN APPENDIX A


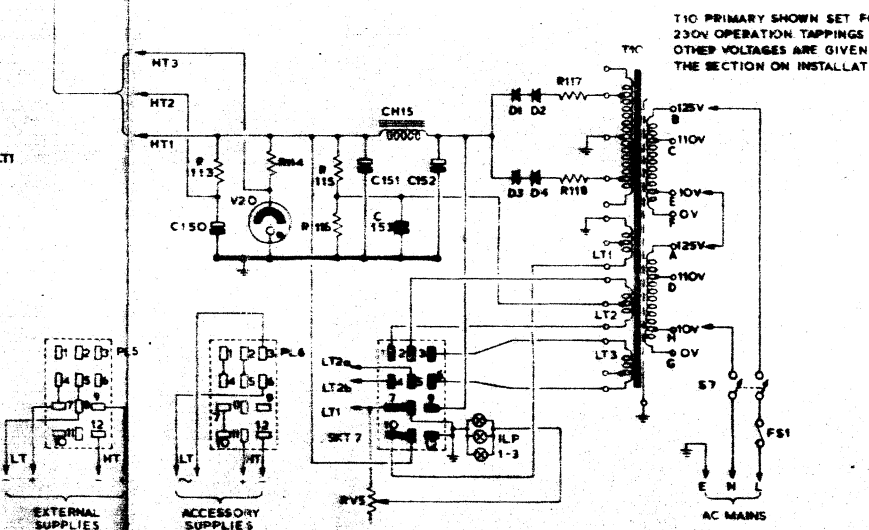


T10 PRIMARY SHOWN SET FOR 230V OPERATION. TAPPINGS FOR OTHER VOLTAGES ARE GIVEN IN THE SECTION ON INSTALLATION

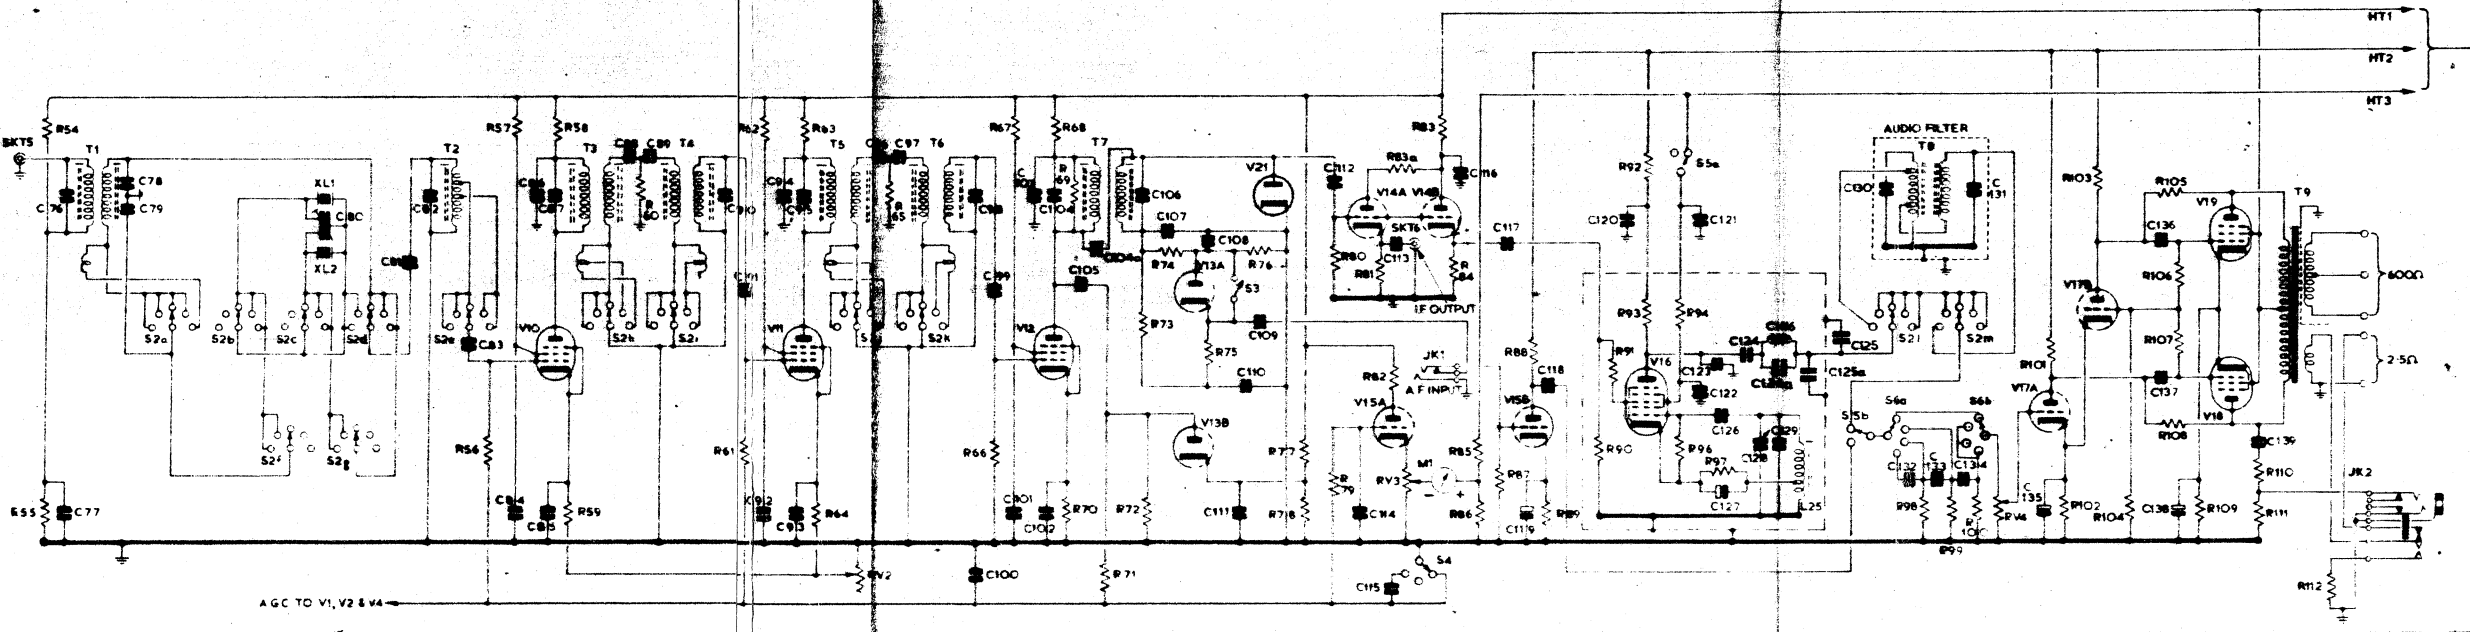

AGC TO V1, V2 & V4

HEATER CIRCUITRY

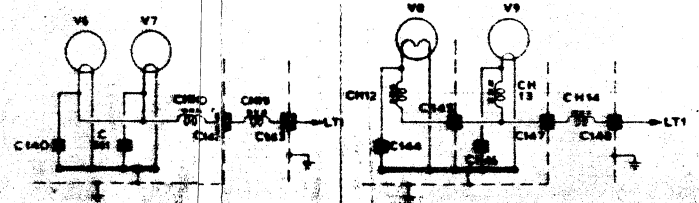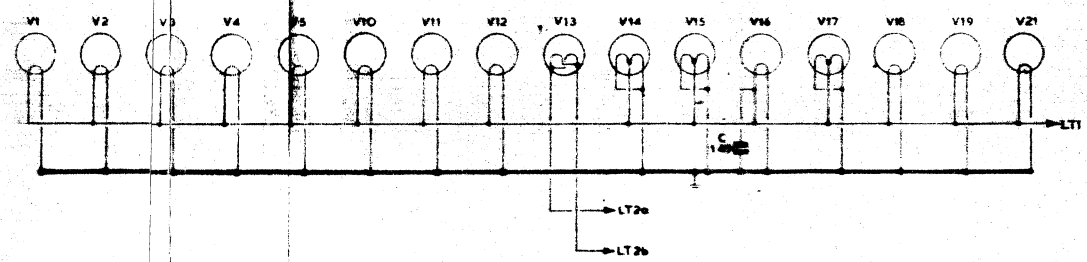


VALVE BASES AND CONNECTIONS ARE GIVEN IN APPENDIX A

SWITCH FUNCTIONS

CIRCUIT REF	FUNCTION
S2	SELECTIVITY SWITCH
S3	NOISE LIMITER SWITCH
S4	AGC SWITCH
S5	MODE SWITCH
S6	BASS SWITCH
S7	MAINS SWITCH


SWITCH POSITIONS

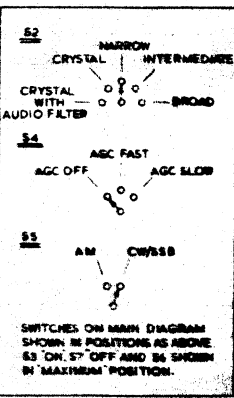

CONTROL FUNCTIONS


CIRCUIT REF	FUNCTION
RV2	IF GAIN CONTROL
RV3	METER ADJ.
RV4	AF GAIN CONTROL
RV5	DIAL LAMP BRIGHTNESS
CV28	BFO PITCH

SWITCHES ON MAIN DIAGRAM SHOWN IN POSITIONS AS ABOVE S3 ON, S7 OFF AND S6 SHOWN IN "MAXIMUM" POSITION.

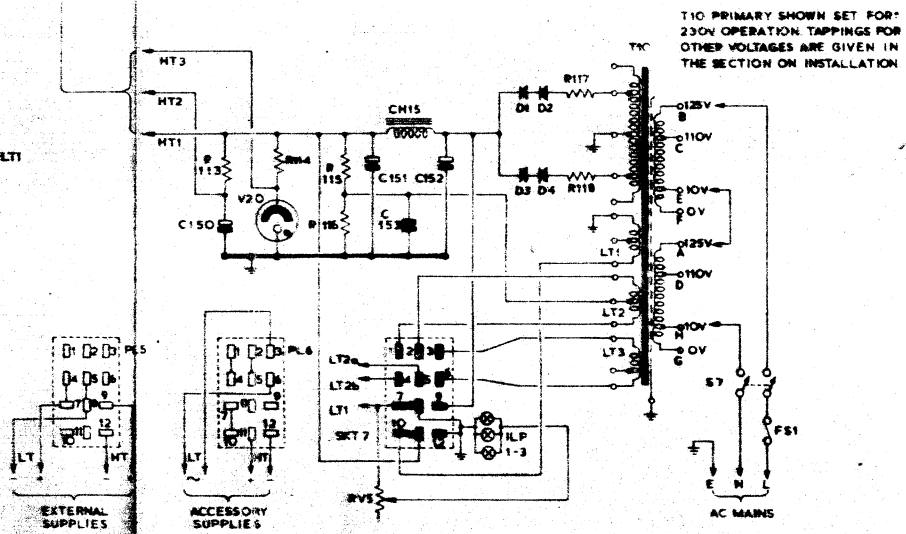


T10 PRIMARY SHOWN SET FOR 230V OPERATION. TAPINGS FOR OTHER VOLTAGES ARE GIVEN IN THE SECTION ON INSTALLATION

NOTE: ALL CIRCUITRY MARKED THUS—
IS SHOWN IN ABBREVIATED
FORM ONLY. FOR COMPLETE
SWITCHING DIAGRAMS REFER
TO DETACHED CIRCUITS 1-5.

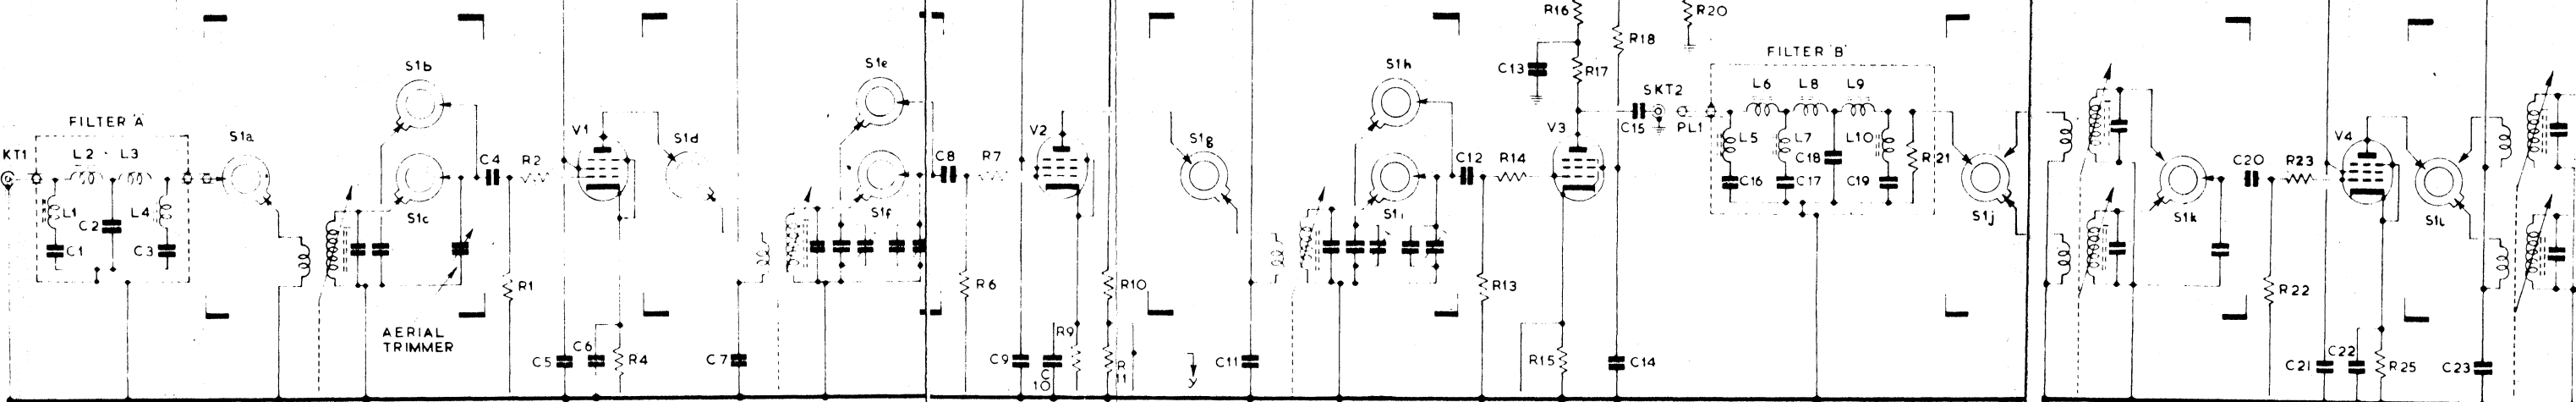


VALVE BASES AND
CONNECTIONS ARE
GIVEN IN APPENDIX 'A'




1st OSCILLATOR UNIT

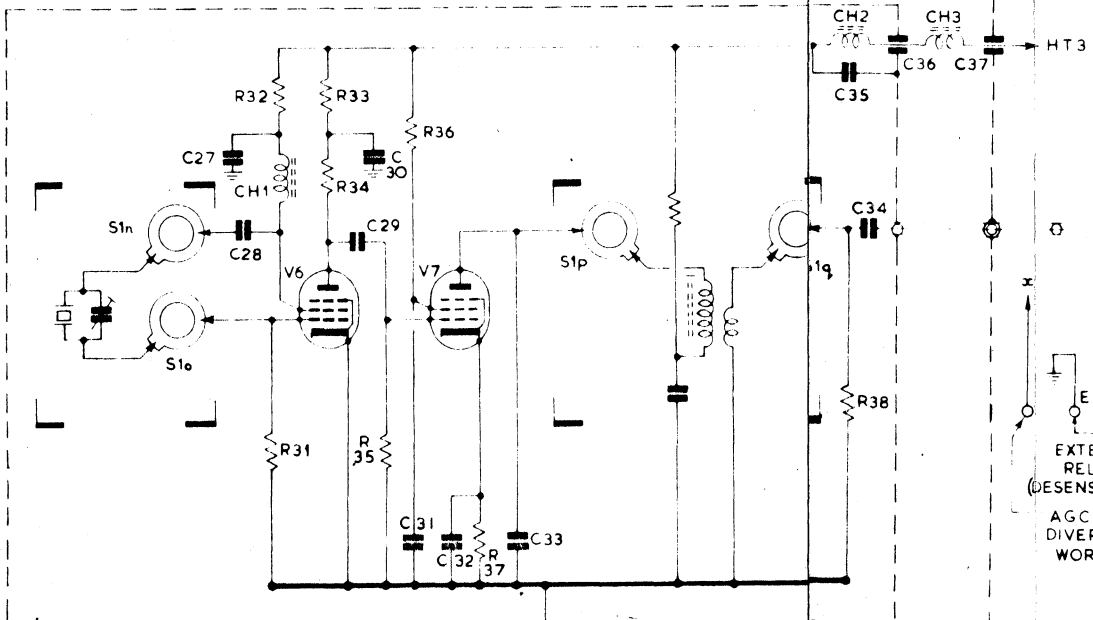

2nd OSCILLATOR UNIT

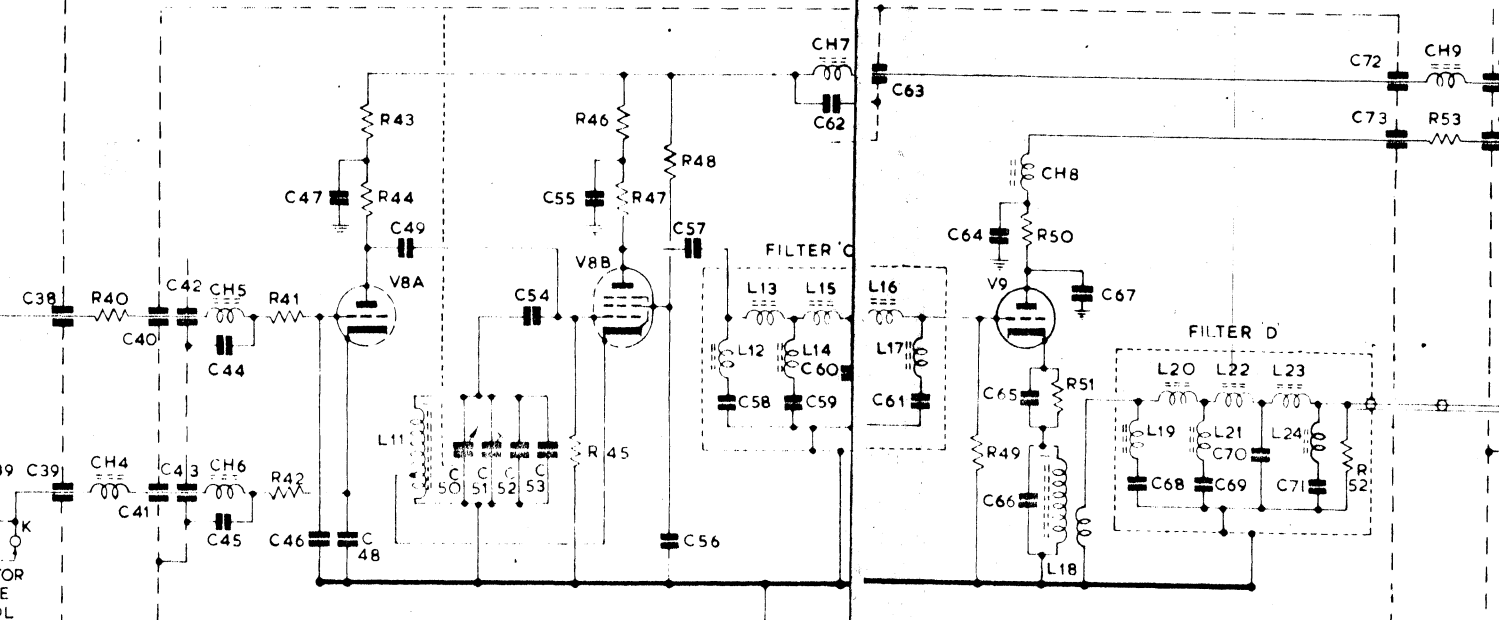

NOTE: SHORTING STRAPS MUST
BE FITTED AS INDICATED
WHEN THESE FACILITIES
ARE NOT REQUIRED.

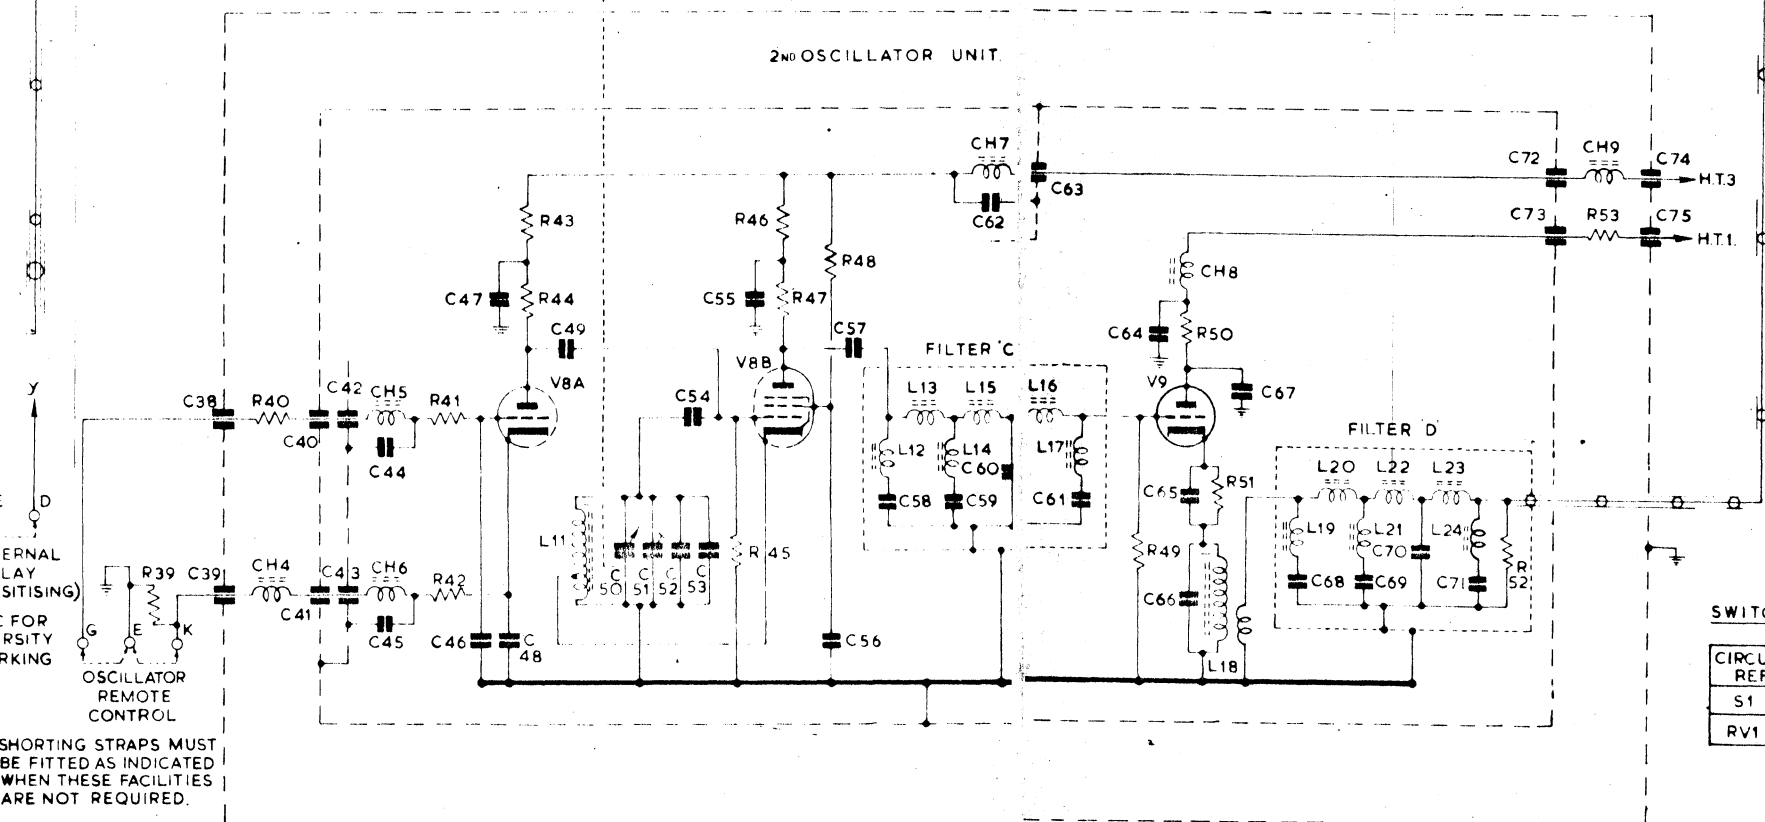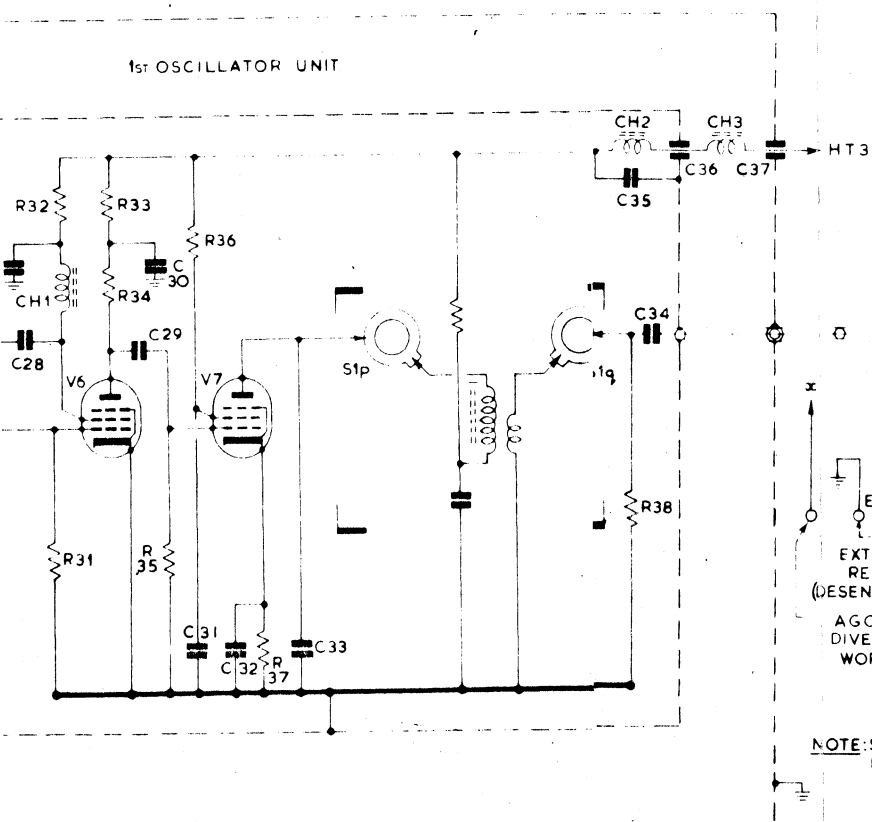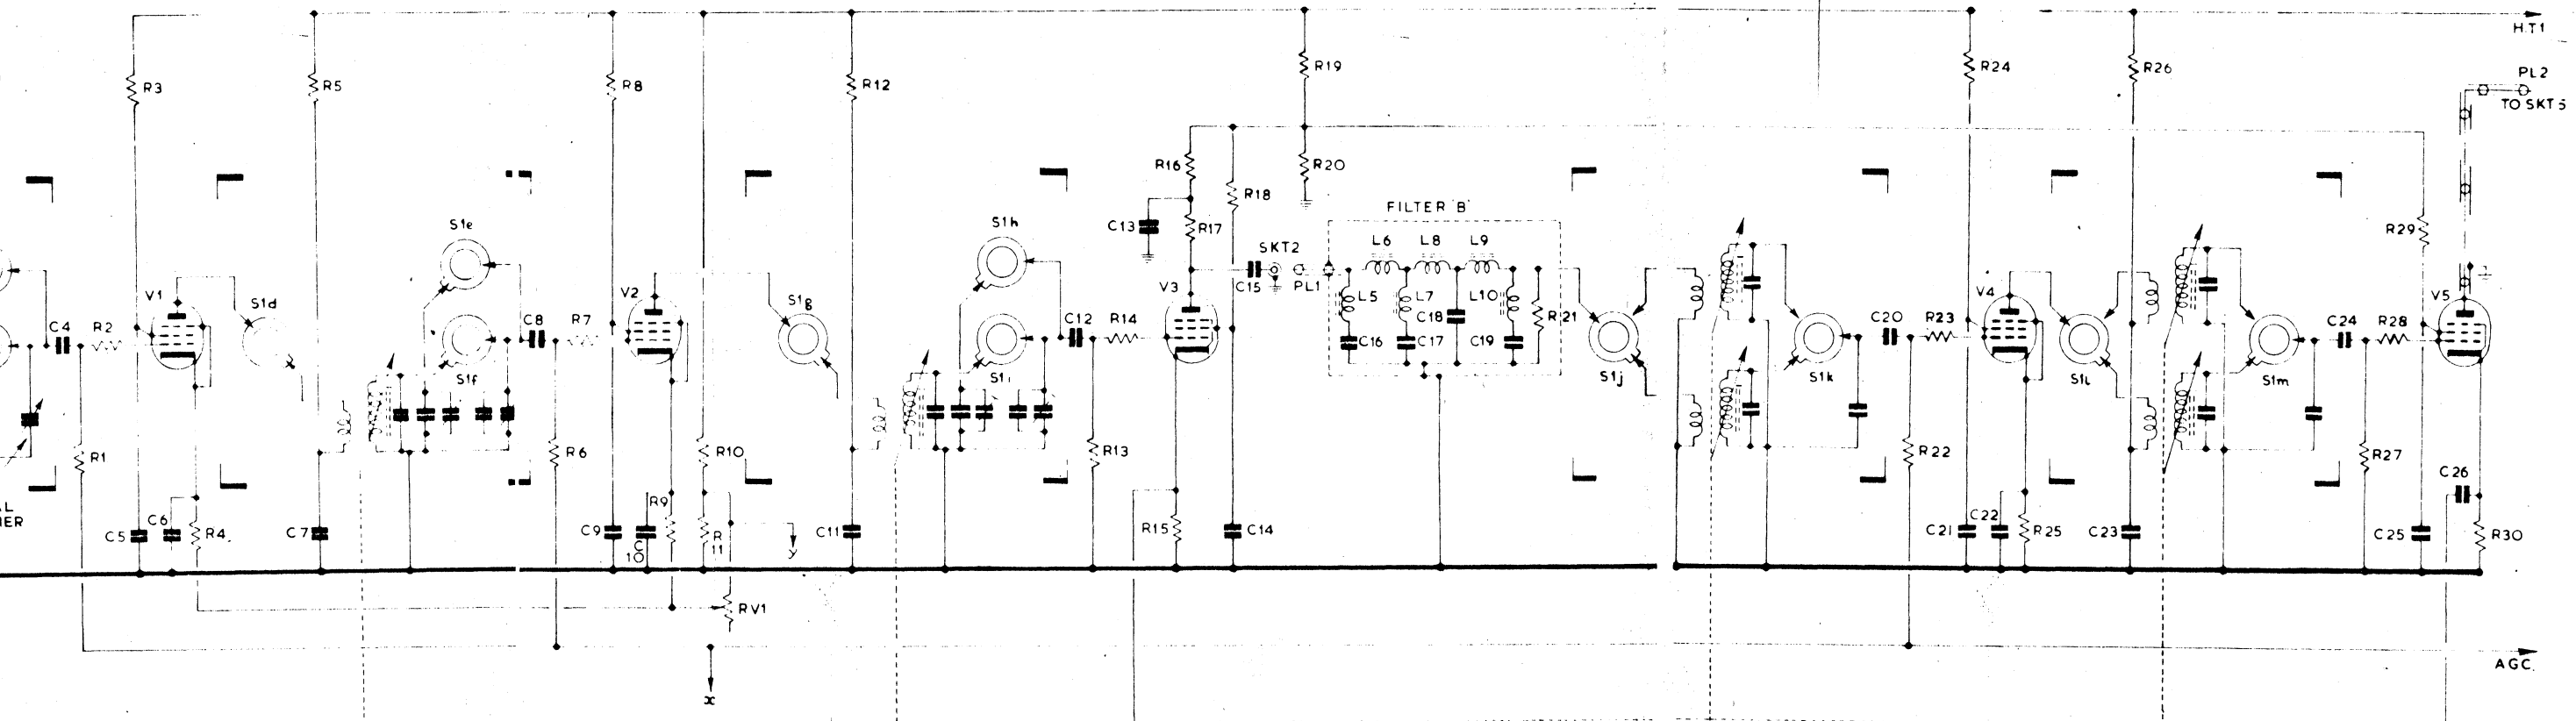

NOTE: REFER TO
MAIN CIRCUIT DIAGRAM
PART 2 FOR COMPLETE
HEATER CIRCUITRY.

SWITCH & CONTROL FUNCTIONS

CIRCUIT REF	FUNCTION
S1	WAVECHANGE SWITCH
RV1	R.F. GAIN CONTROL