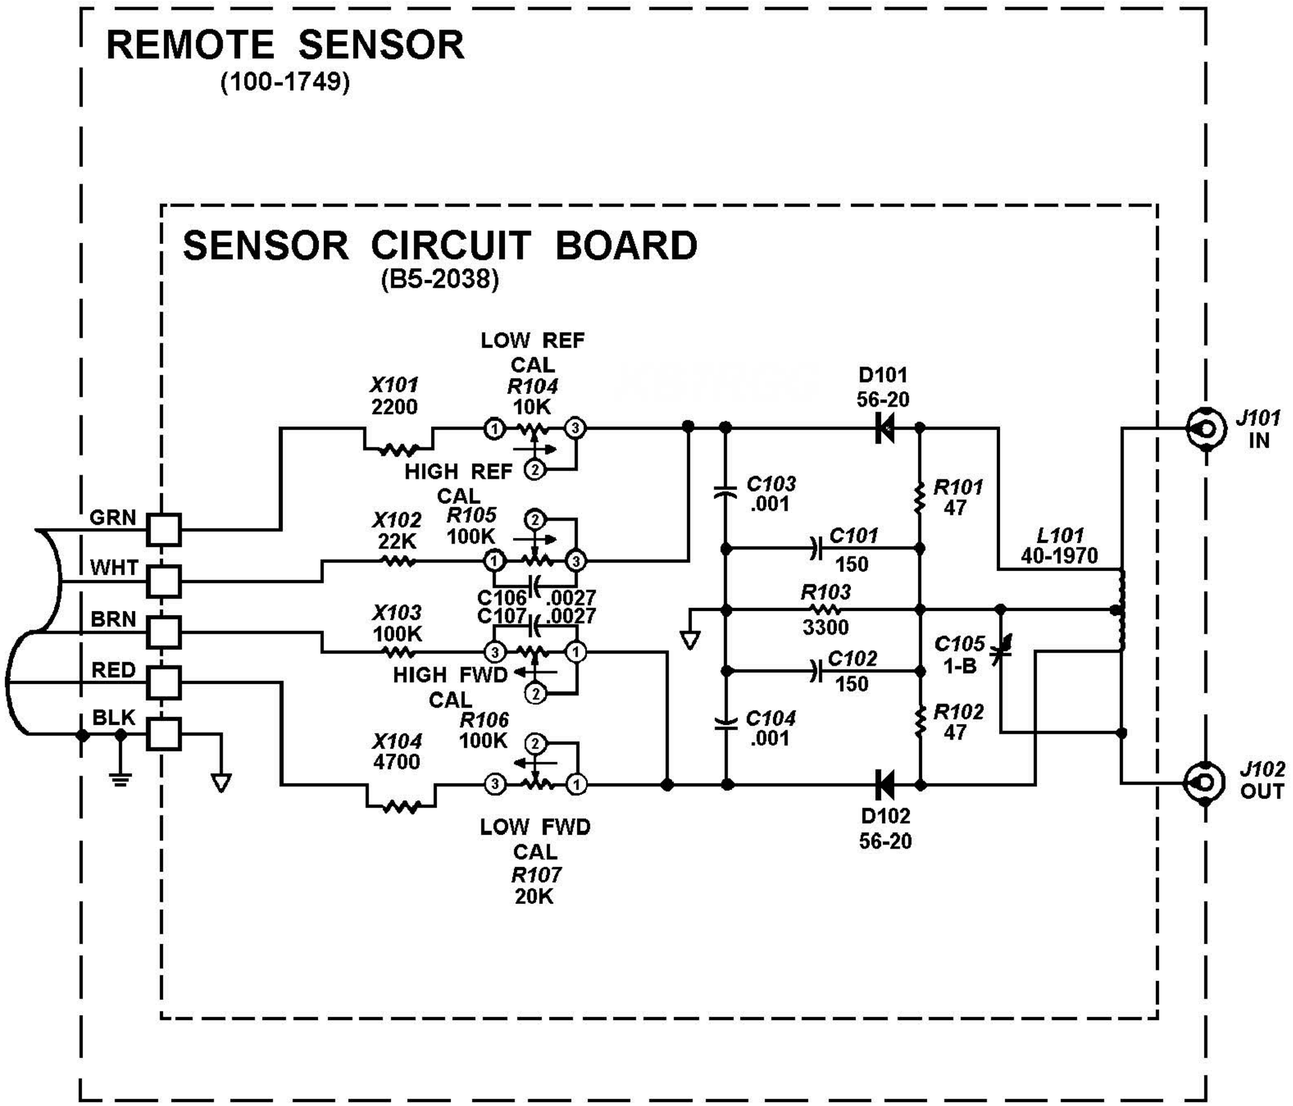


SCHEMATIC OF THE HEATHKIT HF DUAL WATTMETER MODEL HM-2140-A

NOTES:

1. ALL RESISTOR VALUES ARE IN OHMS (Ω) : (K = 1000).
2. ALL RESISTORS ARE 1/4-WATT, 5% TOLERANCE UNLESS OTHERWISE NOTED.
3. CAPACITOR VALUES LESS THAN 1 ARE IN uF (MICROFARADS). VALUES OF 1 OR GREATER ARE IN pF (PICOFARADS) UNLESS OTHERWISE MARKED.
4. THIS SYMBOL INDICATES A CHASSIS GROUND.
5. THIS SYMBOL INDICATES A CIRCUIT BOARD GROUND.
6. THIS SYMBOL INDICATES A CIRCUIT BOARD WIRE CONNECTION.
7. THIS SYMBOL INDICATES THE CLOCKWISE ROTATION OF A CONTROL.
8. THIS SYMBOL INDICATES A DC VOLTAGE MEASURED FROM THE POINT INDICATED TO CIRCUIT BOARD GROUND.

Part of 595-2969-02