



Grades Guide

New Search

Home Page > Tooling Systems > HSK > ADJ HSK A



Tooling Systems
Main Application





HSK
Sub Application

[More Info](#) [Related Holder](#) [Accessories](#)

HSK FINEFIT

ADJ HSK A : Center alignment shank and base with a DIN69893 form A HSK tapered shank for specially tailored tool holders.

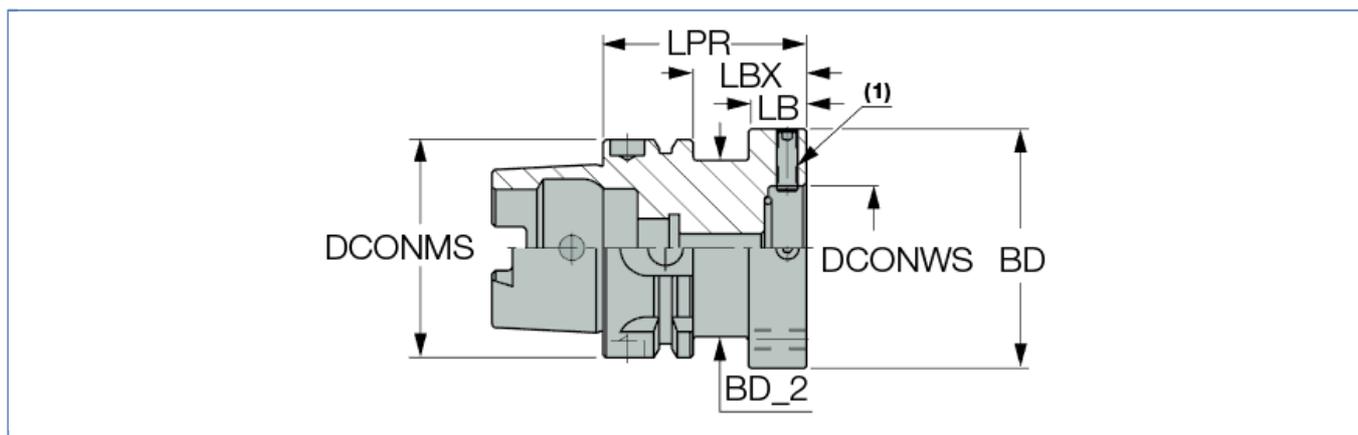

| Designation | DCONMS | LPR | LBX | LB | DCONWS | BD | BD_2 | kg |
|------------------|--------|-------|------|-------|--------|-------|-------|------|
| ADJ HSK A63 D70 | 63.00 | 60.00 | 34.0 | 18.00 | 35.00 | 70.00 | 46.00 | 1.24 |
| ADJ HSK A100 D70 | 100.00 | 55.00 | 26.0 | - | 35.00 | 70.00 | - | 2.63 |

(1) Use 4 mm hex key for screw adjustment.

A cooling tube must be used with all coolant through HSK spindles (should be ordered separately).

For shank dimensions, Click on "More Info".

