


SITH Quick-Change Rigid Tap & Reamer Holder HSK, CAT & BT Shanks

Features, Application, Ordering:

- ⇒ Coolant Thru
- ⇒ Identification chip is not included.
- ⇒ For use with machines with synchronized feed and spindle rotation.
- ⇒ Order Adapters Separately, see page 24.
- ⇒ Optional rust resistant chrome finish, add "ST" to the part number.
- ⇒ Specials Available Upon Request
- ⇒ Accepts Bilz, Collis, Universal, Lyndex and many other tap adapters.

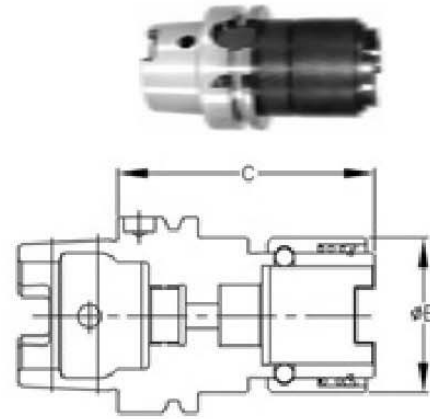


PART NUMBER	SHANK	TAP RANGE	B DIA.	C
H63A-TR1-244	HSK-63A	SIZE 1 0-9/16 HAND	1.26	2.44
H63A-TR2-325		SIZE 2 5/16-7/8 HAND	1.96	3.25
H100A-TR1-269	HSK-100A	SIZE 1 0-9/16 HAND	1.26	2.69
H100A-TR2-378		SIZE 2 5/16-7/8 HAND	1.96	3.50
C40-TR1-250	CAT-40	SIZE 1 0-9/16 HAND	1.26	2.50
C40-TR2-300		SIZE 2 5/16-7/8 HAND	1.96	3.00
C50-TR1-300	CAT-50	SIZE 1 0-9/16 HAND	1.26	3.00
C50-TR2-300		SIZE 2 5/16-7/8 HAND	1.96	3.00
C50-TR3-400		SIZE 3 3/4-1-3/8 HAND	2.83	4.00
B40-TR1-236	BT-40	SIZE 1 0-9/16 HAND	1.26	2.36
B40-TR2-315		SIZE 2 5/16-7/8 HAND	1.96	3.15

ACTH Adjustable Tension & Compression Quick-Change Tap Holder CAT & BT Shanks

Features, Application, Ordering:

- ⇒ Adjustable Mechanism, allows the customer to customize the amount of tension/compression stroke.
- ⇒ Order Adapters Separately, see page 23.
- ⇒ Specials Available Upon Request
- ⇒ Accepts Bilz, Collis, Universal, Lyndex and many other tap adapters.

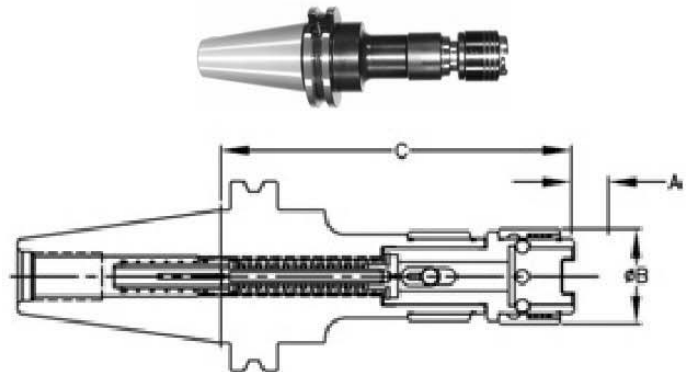

PART NUMBER	SHANK	TAP RANGE	B	C	T TENSION
C40-TA1-467	CAT-40	0-9/16, 1/8 NPT	1.26	4.67	.50
C40-TA2-629		5/16-7/8, 1/4-1/2 NPT	1.96	6.29	.88
C50-TA1-391	CAT-50	0-9/16, 1/8 NPT	1.26	3.91	.50
C50-TA2-554		5/16-7/8, 1/4-1/2 NPT	1.96	5.54	.88
C50-TA3-850		3/4-1 3/8, 3/4-1 NPT	2.91	8.5	1.38
B40-TA1-467*	BT-40	0-9/16, 1/8 NPT	1.26	4.92	.50
B40-TA2-629*		5/16-7/8, 1/4-1/2 NPT	1.96	6.5	.88