



EC™


PEM eConnect® FASTENERS



PEM eConnect® fastening technology provides superior electrical connection solutions.

NEW!

ECCB™ PEM eConnect®
Contact Bushing for use in
aluminum and copper busbars.




PEM® eConnect™ fastening technology provides repeatable, consistent electrical joints and superior installation in applications that demand superior performance from internal components.

- No hot spots or poor conductivity
- Joint has an electrical resistance of less than 100 $\mu\Omega$
- Range of captivation options
- Quick, secure automated installation
- Proven, application-tested performance
- Unmatched PEM® quality

Your Go-To Choice for Superior Electrical Connection in Busbar and PCB Applications

Busbar

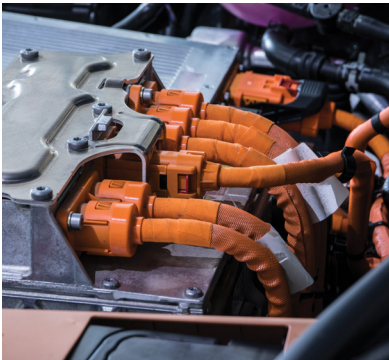

PCB



- Power Distribution Systems
- Power Distribution Headers
- Battery Management Systems
- Battery Pack
- Battery Disconnect Units
- EV Drivetrains
- EV Motor
- On Board Charger

- Connectivity Systems
- Infotainment Systems
- Safety & Driver Assistance
- ADAS
- Body Electronics
- Engine Control Units
- Heads Up Displays
- EV Powertrain Electronic Control

For fastener drawings and models, visit www.pemnet.com.


Custom sizes are available on special order. Contact us for more information.

PEM eConnect® Fastening Technology provides repeatable, consistent electrical joints and superior installation in applications that demand superior performance from internal components.

- Quick, Secure Automated Installation
- Use PEM eConnect® fastening technology with our line of fully automated installation systems for an efficient, cost-saving total system solution
- No hot spots or poor conductivity
- Joint has an electrical resistance of less than 100 $\mu\Omega$
- Range of captivation options
- Unmatched PEM® Quality
- PEM® products' time-tested, proven performance makes them the go-to choice for electrical connection solutions

Fastener drawings and models are available at www.pemnet.com.
Custom sizes are available on special order. [Contact us](#) for more information.

EPCRB™ PEM eConnect® Self-Clinching Pin

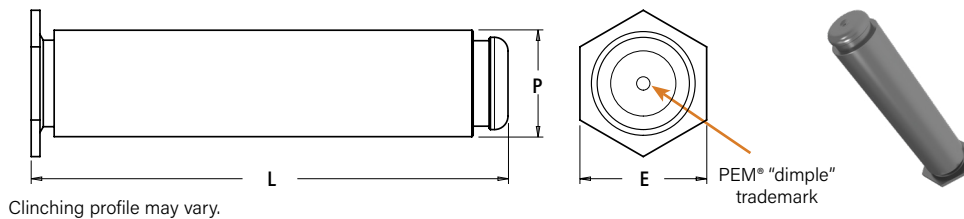

Part Number Designation


EPCR	B	-	8	-	35.6	Ag
Type	Material Code		Pin Diameter		Pin Length	Finish

Type	Pin Dia. Code	Pin Length Code	Sheet Thickness		Hole Size in Sheet +.002" / +0.05mm		E Nom.		L ±.012" / ± 0.3mm		P ±.004" / ±0.1mm		Min. Dist. Hole C/L to Edge ⁽¹⁾	
			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EPCRB	8	35.6	.079 - .158	2 - 4	.389	8.1	.375	9.53	1.402	35.6	.315	8	.374	9.5

(1) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

Custom sizes are available on special order. [Contact us](#) for more information.

EPFRB™ PEM eConnect® Broaching Pin

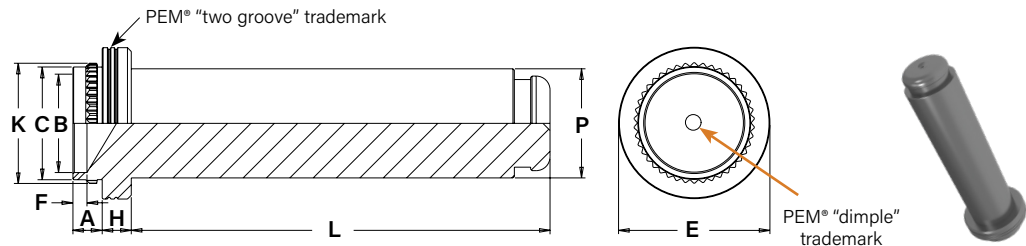

Part Number Designation

EPFR B - 8 - 30.8 Ag

↓ ↓ ↓ ↓ ↓

Type Material Code Pin Diameter Pin Length Finish


Type	Pin Dia. Code	Pin Length Code	Sheet Thickness		Hole Size in Sheet +.002" / +0.05mm		A Max.		B ±.003" / ±0.08mm		C Max.		E ±.005" / ±0.13mm		F ±.010" / ±0.25mm		H ±.0029" / ±0.07mm		K ±.003" / ±0.08mm		L ±.007" / ±0.18mm		P ±.002" / ±0.05mm		Min. Dist. Hole C/L to Edge ⁽¹⁾ +.005" / -.001" +0.13 / -0.03mm	
			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EPFRB	8	30.8	.049-.065	1.24-1.65	.335	8.5	.058	2.18	.284	7.21	.329	8.35	.437	11.09	.037	0.93	.084	2.13	.350	8.89	1.209	30.8	.315	8	.346	8.8

(1) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).


ECCB™ PEM eConnect® Contact Bushing

NEW - ECCB™ PEM® eConnect® Contact Bushing:

- Designed for installation into straight punched holes without additional surface preparation.
- Breaks aluminum and copper oxide layers on busbars for low resistance connections.
- Combined broach and flare install ensures consistent mechanical and electrical connections.
- For use in panels with sheet hardness HRB 50 / HB 82 or less.

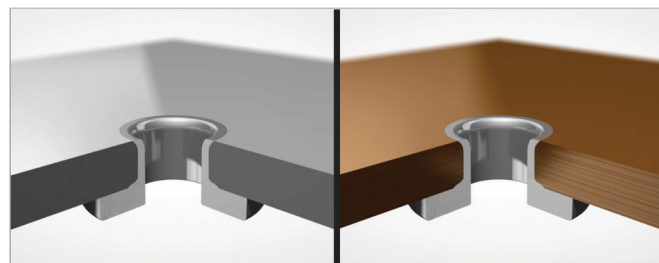

ECCB™ contact bushing is suitable for aluminum and copper busbars

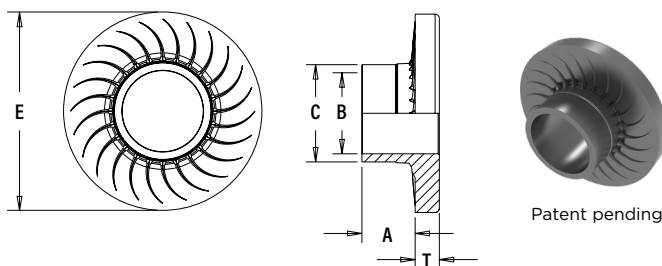

Part Number Designation

ECCB - 6.7 - 440 Ag


↓ ↓ ↓ ↓

Type Thru-Hole Code Length Finish

Type	Thru-Hole Code	L Length Code	A (Shank) Max.		B Thru-Hole Dia. ±.004" / ±0.1mm		Rec. Sheet Thickness +.003" / +0.08mm		Hole Size In Sheet +.003" / +0.08mm		Pilot C Max.		E ±.010" / ±0.25mm		T ±.010" / ±0.25mm		Min. Dist. Hole C/L to Edge ⁽¹⁾	
			in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
ECCB	6.7	440	.173	4.4	.265	6.7	.158	4	.325	8.25	.315	8	.646	16.4	.079	2	.325	8.25

(1) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KFH™ Broaching Studs




Part Number Designation

KFH - 632 - 8 ET

↓ ↓ ↓ ↓

Type and Thread Length Finish

Material Code Code

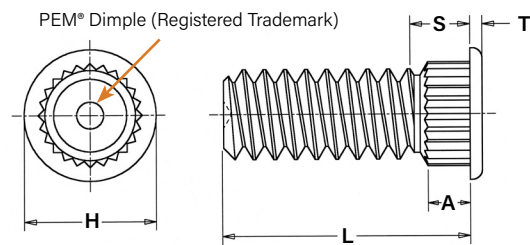

All dimensions are in inches.


Unified	Thread Size (#4-40)	Type	Thread Code	Length Code "L" ± 0.010 (Length code in 16ths of an inch)						A (Shank) Max.	Min. Sheet Thickness	Hole Size in Sheet +0.003 -0.000	Max. Hole Size in Attached Parts	H ± 0.010	S Max. (1)	T ± 0.005	Min. Dist. Hole C/L to Edge (2)
				.250	.312	.375	.500	.625	.750								
	.112-40 (#4-40)	KFH	440	4	5	6	8	10	12	.065	.060	.120	.145	.180	.09	.020	.15
	.138-32 (#6-32)	KFH	632	4	5	6	8	10	12	.065	.060	.140	.170	.200	.09	.020	.19
	.164-32 (#8-32)	KFH	832	4	5	6	8	10	12	.065	.060	.166	.195	.225	.09	.020	.20
	.190-32 (#10-32)	KFH	032	4	5	6	8	10	12	.065	.060	.189	.220	.250	.09	.020	.20

All dimensions are in millimeters.

Metric	Thread Size x Pitch	Type	Thread Code	Length Code "L" ± 0.25 (Length code in millimeters)						A (Shank) Max.	Min. Sheet Thickness	Hole Size in Sheet +0.08	Max. Hole Size in Attached Parts	H ± 0.25	S Max. (1)	T ± 0.13	Min. Dist. Hole C/L to Edge (2)
				6	8	10	12	15	18								
	M3 x 0.5	KFH	M3	6	8	10	12	15	18	1.65	1.53	3	3.7	4.58	2.3	0.51	3.8
	M4 x 0.7	KFH	M4	6	8	10	12	15	18	1.65	1.53	4.2	4.8	5.74	2.3	0.51	5.1
	M5 x 0.8	KFH	M5	6	8	10	12	15	18	1.65	1.53	1.53	5.8	6.6	2.3	0.51	5.3

- (1) Threads are gaugeable to within 2 pitches of the "S" Max. dimension. A class 3B/5H maximum material commercial nut shall pass up to the "S" Max. dimension.
- (2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

KFB3™ Broach/Flare-Mount Standoffs




Part Number Designation

KFB3 - 632 - 12 ET

↓ ↓ ↓ ↓

Type and Thread Length Finish
Material Code Code

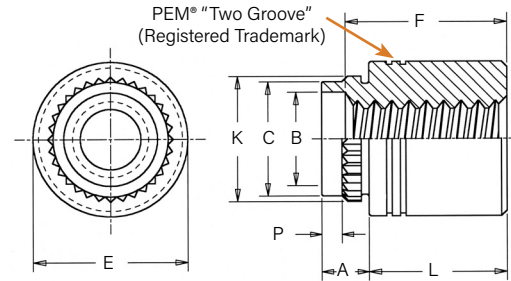

All dimensions are in inches.

Unified	Thread Size	Type	Thread Code	Length Code "L" ±.005 (Length code in 32nds of an inch)										A (shank) Max.	Sheet Thickness	Hole Size in Sheet +.005 -.001	B ±.003	C Max.	E ±.005	K ±.003	P ±.010	Min. Dist. Hole C/L to Edge (2)	
				.062	.125	.187	.250	.312	.375	.500	.625	.750 (1)	1.00 (1)										
	.112-40 (#4-40)	KFB3	440	2	4	6	8	10	12	16	20	—	—	.09	.050-.065	.166	.122	.165	.219	.179	.040	.17	
	.138-32 (#6-32)	KFB3	632	2	4	6	8	10	12	16	20	24	32	.09	.050-.065	.213	.171	.212	.280	.226	.040	.22	
	.190-32 (#10-32)	KFB3	032	2	4	6	8	10	12	16	20	24	32	.09	.050-.065	.272	.128	.271	.375	.285	.040	.275	
	.250-32 (1/4-20)	KFB3	0420	2	4	6	8	10	12	16	20	24	32	.09	.050-.065	.335	.183	.331	.437	.348	.040	.335	
"F" Min. Thread Length (Where Applicable)			Full									.375 Blind											


All dimensions are in millimeters.

Metric	Thread Size x Pitch	Type	Thread Code	Length Code "L" ±0.13 (Length code in millimeters)									A (shank) Max.	Sheet Thickness	Hole Size in Sheet +0.13 -0.03	B ±0.08	C Max.	E ±0.13	K ±0.08	P ±0.25	Min. Dist. Hole C/L to Edge (2)
	M3 x 0.5	KFB3	M3	2	3	4	6	8	10	12	14	16	2.29	1.27-1.65	4.22	3.23	4.2	5.56	4.55	1	4.33
	M4 x 0.7	KFB3	M4	2	3	4	6	8	10	12	14	16	2.29	1.27-1.65	6.4	5.23	6.33	8.74	6.68	1	6.36
	M5 x 0.8	KFB3	M5	2	3	4	6	8	10	12	14	16	2.29	1.27-1.65	6.9	5.8	6.86	9.53	7.23	1	7
	M6 x 1	KFB3	M6	2	3	4	6	8	10	12	14	16	2.29	1.27-1.65	8.5	7.2	8.4	11.1	8.83	1	8.5
	"F" Minimum Thread Length (Where Applicable)			Full						9.5											


(1) Blind at shank end with .375" minimum thread length from head end.

(2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

SMTSOB™ Reelfast® Surface Mount Nuts And Spacers/Standoffs

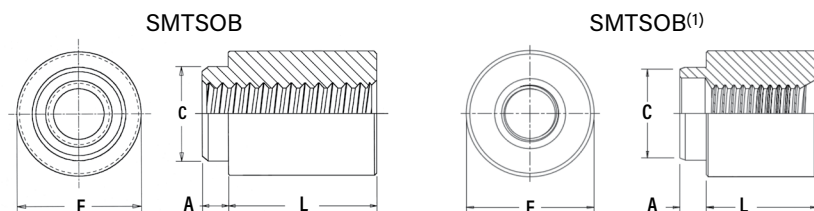

Thread/thru hole sizes 2-56, 4-40, 6-32, 8-32, 116, 143, M2, M2.5, M3, M3.5, M4, 3.1, 3.6, and 4.2



PEM® SMTSOB standoffs may be marked with either our "Two Groove" or "3 Dimple" registered trademarks.

Part Number Designation


SMTSOB - 440 - 8 ET

↓ ↓ ↓ ↓

Type and Thread or Length Finish

Material Thru Hole Code

Stencil Masking Examples



NOTE: Standoffs are available on special order without a pilot that do not require a thru hole for installation. Contact techsupport@pemnet.com for more information.

All dimensions are in inches.

Unified	Thread Size	Thru Hole +.004 -.003	Type	Thread or Thru Hole Code	Length Code "L" ±.005 (Length code in 32nds of an inch)				Min. sheet Thickness	A Max.	C Max.	E		H Nom.	ØH Hole Size in Sheet +.003 -.000	ØD Min. Solder Pad
					.062	.125	.250	.375				Ref.	±.005			
	.060-80 (#0-80)	—	SMTSOB	080	2	4	—	—	.020	.019	.095	.144	—	.125	.098	.165
	.086-56 (#2-56)	—	SMTSOB	256	2	4	8 ⁽¹⁾	12 ⁽¹⁾	.060	.060	.142	—	.219	—	.147	.244
	.112-40 (#4-40)	—	SMTSOB	440	2	4	8 ⁽¹⁾	12 ⁽¹⁾	.060	.060	.161	—	.219	—	.166	.244
	.1387-32 (#6-21)	—	SMTSOB	632	2	4	8 ⁽¹⁾	12 ⁽¹⁾	.060	.060	.208	—	.281	—	.213	.306
	.164-32 (#8-32)	—	SMTSOB	832	2	4	8 ⁽¹⁾	12 ⁽¹⁾	.060	.060	.245	—	.344	—	.250	.369
	—	.116	SMTSOB	116	2	4	8	12	.060	.060	.161	—	.219	—	.166	.244
	—	.143	SMTSOB	143	2	4	8	12	.060	.060	.208	—	.281	—	.213	.306

All dimensions are in millimeters.

Metric	Thread Size	Thru Hole +0.10 -0.08	Type	Thread or Thru Hole Code	Length Code "L" ±0.13 (Length code in millimeters)							Min. sheet Thickness	A Max.	C Max.	E		H Nom.	ØH Hole Size in Sheet +0.08	ØD Min. Solder Pad
														Ref.	±0.13				
	S1	—	SMTSOB	M1	1	2	3	—	—	—	0.5	0.48	2.41	3.66	—	3.18	2.5	4.19	
	S1.2	—	SMTSOB	M1.2	1	2	3	—	—	—	0.5	0.48	2.41	3.66	—	3.18	2.5	4.19	
	S1.4	—	SMTSOB	M1.4	1	2	3	—	—	—	0.5	0.48	2.41	3.66	—	3.18	2.5	4.19	
	M1.6 x 0.35	—	SMTSOB	M1.6	1	2	3	—	—	—	0.5	0.48	2.41	3.66	—	3.18	2.5	4.19	
	M2 x 0.4	—	SMTSOB	M2	—	2	3	4 ⁽¹⁾	6 ⁽¹⁾	8 ⁽¹⁾	10 ⁽¹⁾	1.53	1.53	3.6	—	5.56	—	3.73	6.2
	M2.5 x 0.45	—	SMTSOB	M2.5	—	2	3	4 ⁽¹⁾	6 ⁽¹⁾	8 ⁽¹⁾	10 ⁽¹⁾	1.53	1.53	4.09	—	5.56	—	4.22	6.2
	M3 x 0.5	—	SMTSOB	M3	—	2	3	4 ⁽¹⁾	6 ⁽¹⁾	8 ⁽¹⁾	10 ⁽¹⁾	1.53	1.53	4.09	—	5.56	—	4.22	6.2
	M3.5 x 0.6	—	SMTSOB	M3.5	—	2	3	4 ⁽¹⁾	6 ⁽¹⁾	8 ⁽¹⁾	10 ⁽¹⁾	1.53	1.53	5.28	—	7.14	—	5.41	7.77
M4 x 0.7	—	SMTSOB	M4	—	2	3	4	6 ⁽¹⁾	8 ⁽¹⁾	10 ⁽¹⁾	1.53	1.53	6.22	—	8.74	—	6.35	9.37	
—	3.1	SMTSOB	3.1	—	2	3	4	6	8	10	1.53	1.53	4.09	—	5.56	—	4.22	6.2	
—	3.6	SMTSOB	3.6	—	2	3	4	6	8	10	1.53	1.53	5.28	—	7.14	—	5.41	7.77	
—	4.2	SMTSOB	4.2	—	2	3	4	6	8	10	1.53	1.53	6.22	—	8.74	—	6.35	9.37	

(1) SMTSOB fasteners with this length code have a shank counterbore.

Number Of Parts Per Reel / Pitch (MM) For Each Size


Thread/ Thru-Hole Size	Length Code							
	1	2	3	4	6	8	10	12
080	—	3500 / 8	—	2000 / 8	—	—	—	—
256, 440, 632, 116, 143	—	1500 / 12	—	1000 / 12	—	650 / 12	—	300 / 16
832	—	1100 / 16	—	800 / 16	—	500 / 16	—	300 / 16
M1, M1.2, M1.4, M1.6	3500 / 8	2500 / 8	2000 / 8	—	—	—	—	—
M2, M2.5, M3, M3.5, 3.1, 3.6	—	1500 / 12	1000 / 12	900 / 12	650 / 12	375 / 16	300 / 16	—
M4, 4.2	—	1100 / 16	800 / 16	675 / 16	500 / 16	375 / 16	300 / 16	—



A polyimide patch is supplied to allow for reliable vacuum pickup. Fasteners are also available without a patch which may provide a lower cost alternative, depending on your installation methods/requirements.

Packaged on 330 mm recyclable reels. Tape width is 24 mm. Reels conform to EIA-481.

HFHB™ Heavy-Duty Studs

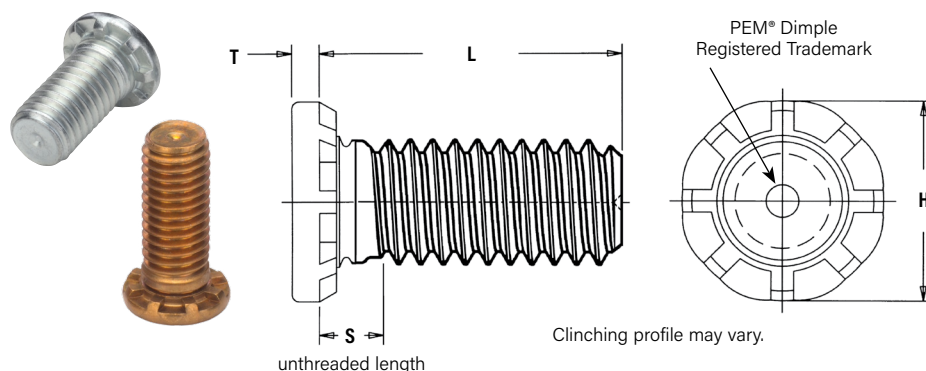

Part Number Designation

HFH	B	-	032	-	12	X
Type	Material Code		Thread Code		Length Code	Finish Code

All dimensions are in inches.

Unified	Thread Size	Type	Thread Code	Length Code "L" ± 0.15 (Length code in 16ths of an inch)							Min. Sheet Thickness (2)	Hole Size in Sheet +.005 -.000	H ± 0.10	S Max. (3)	T Max.	Max. Hole in Attached Parts	Min. Dist. Hole C/L to Edge (4)
				.500	.750	1.00	1.25	.150	.175	2.00							
	.190-32 (#10-32)	HFHB	032	8	12	16	20	24	28	32	.050	.190	.300	.105	.040	.252	.415
	.250-32 (1/4-20)	HFHB	0420	8	12	16	20	24	28	32	.060	.250	.380	.125	.050	.312	.460
	.313-18 (5/16-18)	HFHB	0518	8	12	16	20	24	28	32	.075	.312	.480	.140	.070	.374	.500
	.375-16 (3/8-16)	HFHB	0616	—	12	16	20	24	28	32	.090	.375	.580	.155	.085	.437	.530

Tensile strength: HFH - 120 ksi / HFHS - 75 ksi / HFHB - 60 ksi.


All dimensions are in millimeters.

Metric	Thread Size x Pitch	Type	Thread Code	Length Code "L" ± 0.4 (Length code in millimeters)							Min. Sheet Thickness (2)	Hole Size in Sheet +0.13	H ± 0.25	S Max. (3)	T Max.	Max. Hole in Attached Parts	Min. Dist. Hole C/L to Edge (4)
				15	20	25	30	35	40	50							
	M5 x 0.8	HFHB	M5	15	20	25	30	35	40	50	1.3	5	7.8	2.7	10.14	6.4	10.7
	M6 x 1	HFHB	M6	15	20	25	30	35	40	50	1.5	6	9.4	2.8	1.27	7.5	11.5
	M8 x 1.25	HFHB	M8	15	20	25	30	35	40	50	2	8	12.5	3.5	1.78	9.5	12.7
	M10 x 1.5	HFHB	M10	15	20	25	30	35	40	50	2.3	10	15.7	4.1	2.29	11.5	13.7

Tensile strength: HFH - 900 MPa / HFHS - 515 MPa / HFHB - 415 MPa.

- (1) The electrical resistance (tested at 10 amps DC) between phosphor bronze studs and copper busbars is below 104 μ ohms and 62 μ ohms for the #10-32 / M5 and 3/8-16 / M10 thread sizes respectively, after repeated thermal and mechanical cycling. For complete electrical resistance test data for type HFHB studs installed in copper, see bulletin entitled "Electrical Resistance of HFHB Studs Installed in Copper" on our website.
- (2) See page 20 for installation tool requirements.
- (3) Threads are gaugeable to within 2 pitches of the "S" Max. dimension. A class 3B/5H maximum material commercial nut shall pass up to the "S" Max. dimension.
- (4) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

SOAG™ Grounding/Earthing Standoffs




Part Number Designation

SO A G - 6440 - 10

↓ ↓ ↓ ↓ ↓

Type Material Code Grounding/Earthing Thread Code Length Code

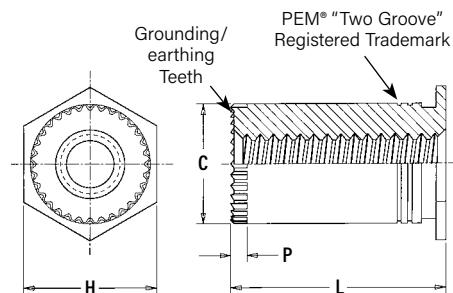

All dimensions are in inches.

Clinching profile may vary.

Unified	Thread Size	Type	Thread Code	Length Code "L" $\pm .010$ -.000 (Length code in 32nds of an inch)							Min. Sheet Thickness	Hole Size in Sheet $\pm .003$ -.000	C $\pm .000$ -.005	H $\pm .005$	P Nom.	Min. Dist. Hole C/L to Edge (2)
				.125	.187	.250	.312	.375	.437	.500						
	.112-40 (#4-40)	SOAG	6440	4	6	8	10	12	14	16	.040	.213	.212	.250	.030	.27
	.138-32 (#6-32)	SOAG	8632	4	6	8	10	12	14	16	.050	.281	.280	.312	.030	.31

All dimensions are in millimeters.

Metric	Thread Size x Pitch	Type	Thread Code	Length Code "L" ± 0.25 (Length code in millimeters)							Min. Sheet Thickness	Hole Size in Sheet ± 0.08	C ± 0.13	H ± 0.25	P Nom.	Min. Dist. Hole C/L to Edge (2)
				3	4	6	8	10	12							
	M3 x 0.5	SOAG	3.5M3	3	4	6	8	10	12	1	5.4	5.39	6.4	0.76	6.8	

(2) For more information on proximity to bends and distance to other clinch hardware, see [PEM® Tech Sheet C/L To Edge](#).

Material And Finish Specifications

Type	Threads ⁽¹⁾		Fastener Material						Standard Finishes			
	Internal, ASME B1.12B/ ASME B1.13M 6H	External, ASME B1.12A/ ASME B1.13M 6g	Free Machining Brass	C14415 (K81) Copper	CDA-510 Phosphor Bronze	Brass	Lead-free Carbon Steel	Aluminum	Matte Electroplated Silver per ASTM B700, Type II, Grade A ⁽¹⁾	Electro-Plated Tin ASTM B545, Class A with Clear Preservative Coating, Annealed ⁽²⁾	No Finish ⁽³⁾	No Finish
EPCRB			▪						▪			
EPFRB			▪						▪			
ECCB				▪					▪	▪		
KFH		▪			▪					▪		
KFB3	▪					▪				▪		
SMTSOB	▪						▪			▪		
HFHB		▪			▪						▪	
SOAG	▪							▪				▪
Part Number Code for Finishes									Ag	ET	X	None

Type	For Use In						
	Sheet Hardness HRB 44 / HB 80 or less ⁽⁴⁾	Sheet Hardness HRB 50 / HB 82 or less ⁽⁴⁾	Sheet Hardness HRB 55 / HB 96 or less ⁽⁴⁾	Sheet Hardness HRB 65 / HB 116 or less ⁽⁴⁾	Sheet Hardness HRB 70 / HB 125 or less ⁽³⁾	Aluminum, Acrylic, Castings, Polycarbonate, and PC Board	PC Board
EPCRB	▪						
EPFRB							▪
ECCB		▪					
KFH			▪			▪	
KFB3				▪		▪	
SMTSOB							▪
HFHB			▪				
SOAG					▪		

(1) See PEM [Technical Support](#) section of our website for related plating standards and specifications.

(2) Optimal solderability life noted on packaging.

(3) "X" suffix studs may have pitch diameters and major diameters below 2A/6g minimum size, per ANSI B1.1, Section 7, and B1.13M, Section 8 to allow for minimum of 0.0002" / 0.0051 mm of plating.

(4) HRB - Hardness Rockwell "B" Scale. HB - Hardness Brinell.


Installation

EPCRB™ Self-clinching Pins

1. Prepare properly sized mounting hole in sheet. Do not perform any secondary operations such as deburring.
2. Insert pin through mounting hole (punch side) of sheet and into anvil hole.
3. With punch and anvil surfaces parallel, apply squeezing force to embed the head of the pin flush in the sheet.

Installation Tooling

Type	HAEGER® Part Number		PEMSERTER® Part Number	
	Anvil	Punch	Anvil	Punch
EPCRB	15875-1	H-108-0020L	8026712	975200048

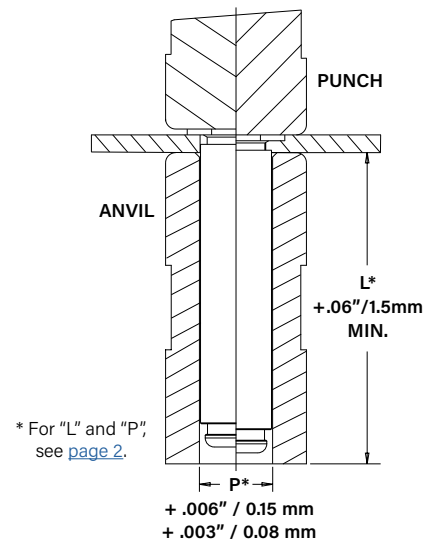


EPFRB™ Broaching Pins

1. Prepare properly sized mounting hole in board.
2. Place fastener into the anvil hole and place the mounting hole over the shank of the fastener.
3. Using a punch flaring tool and a recessed anvil, apply squeezing force until the shoulder of the fastener contacts the board. As the fastener seats itself in the proper position, the punch tool will flare the extended portion of the shank outward to complete the installation. The combination of broaching and flaring provides high pushout performance.


Installation Tooling

Type	HAEGER® Part Number		PEMSERTER® Part Number	
	Anvil	Punch	Anvil	Punch
EPFRB	15875-1	15875-2	8026712	8026681

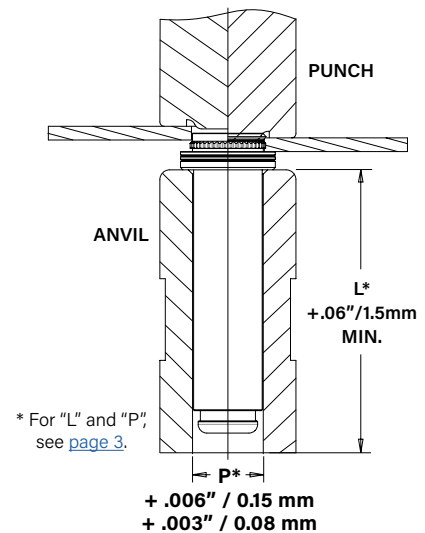


ECCB™ Contact Bushings

1. Prepare properly sized mounting hole in sheet. Do not perform any secondary operations such as deburring.
2. Place the shank of the fastener into the mounting hole.
3. With punch and anvil surfaces parallel, apply squeezing force to flare the shank of the fastener.



Installation Tooling

Type	Anvil Dimensions			HAEGER® Part Number		PEMSERTER® Part Number	
	A	B	C	Anvil	Punch	Anvil	Punch
ECCB	1.18" / 3mm	0.98" / 2.5mm	.040" / 1mm	H-192	H-191	8026985	8026982

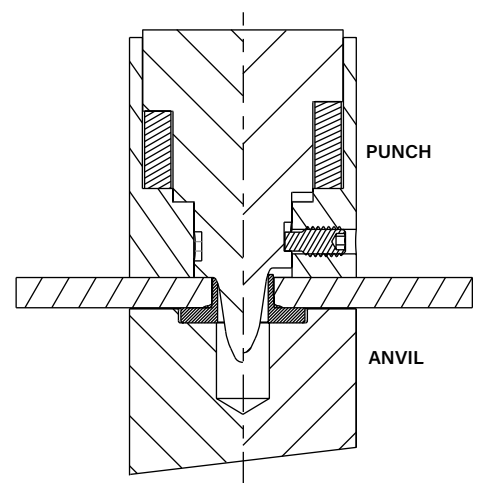


KFH™ Studs

1. Prepare properly sized mounting hole in board.
2. Place fastener into mounting hole as shown.
3. With installation punch and anvil surfaces parallel, apply squeezing force until head contacts the board.

PEMSERTER® Installation Tooling ⁽¹⁾

Part Number	Anvil Dimensions	PEMSERTER® Part Number	
	D +.003" -.000"	Anvil	Punch
KFH-440-L	.113"	970200006300	975200048
KFH-632-L	.140"	970200007300	975200048
KFH-832-L	.166"	970200008300	975200048
KFH-032-L	.191"	970200009300	975200048

Part Number	Anvil Dimensions	PEMSERTER® Part Number	
	D +.003" -.000"	Anvil	Punch
KFH-M3-L	3.1mm	970200229300	975200048
KFH-M4-L	4.1mm	970200019300	975200048
KFH-M5-L	5.1mm	970200008300	975200048

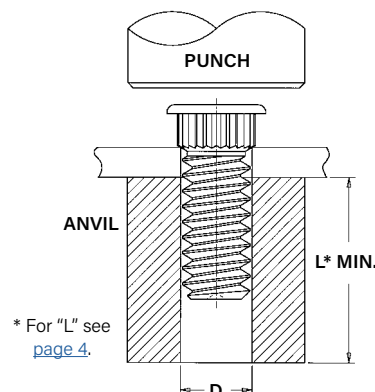

(1) [Click here](#) for a quote on Haeger® custom installation tooling.


KFB3™ Nuts and Standoffs

1. Prepare properly sized mounting hole in board.
2. Place fastener into the anvil hole and place the mounting hole over the shank of the fastener as shown in diagram.
3. Using a punch flaring tool and a recessed anvil, apply squeezing force until the shoulder of the fastener contacts the board. As the fastener seats itself in the proper position, the punch tool will flare the extended portion of the shank outward to complete the installation. The combination of broaching and flaring provides high pushout performance.

PEMSERTER® Installation Tooling ⁽¹⁾


Thread Size	Length Code	PEMSERTER® Part Number	
		Anvil	Punch (Flaring Tool)
#4-40	-2	975201213300	975201231400
#4-40	-4 to -8	975200846300	
#4-40	-10 to -12	975200847300	
#4-40	-16 to -20	975200848300	
#4-40	-20 to -24	975200882300	
#6-32	-2	975201215300	975201232400
#6-32	-4 to -8	975200849300	
#6-32	-10 to -12	975200850300	
#6-32	-16 to -20	975200851300	
#6-32	-22 to -24	975200883300	
#6-32	-28 to -32	975200884300	8026680
#10-32	-2	8026682	
#10-32	-4 to -8	8026683	
#10-32	-10 to -12	8026684	
#10-32	-16 to -20	8026685	
#10-32	-20 to -24	8026686	8026681
#10-32	-28 to -32	8026687	
1/4-20	-2	8026688	
1/4-20	-4 to -8	8026689	
1/4-20	-10 to -12	8026690	
1/4-20	-16 to -20	8026691	8026693
1/4-20	-20 to -24	8026692	
1/4-20	-28 to -32	8026693	

Thread Size	Length Code	PEMSERTER® Part Number	
		Anvil	Punch (Flaring Tool)
M3	-2	975201213300	975201231400
M3	-3 to -6	975200846300	
M3	-8 to -10	975200847300	
M3	-12 to -14	975201222300	
M3	-14 to -16	975200848300	
M4	-2	975201216300	975201221400
M4	-3 to -6	975201217300	
M4	-8 to -10	975201218300	
M4	-12 to -14	975201220300	
M4	-14 to -16	975201219300	
M5	-2	8026670	8026680
M5	-3 to -6	8026671	
M5	-8 to -10	8026672	
M5	-12 to -14	8026673	
M5	-14 to -16	8026674	
M6	-2	8026675	8026681
M6	-3 to -6	8026676	
M6	-8 to -10	8026677	
M6	-12 to -14	8026678	
M6	-14 to -16	8026679	

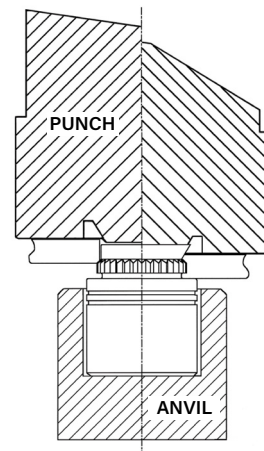

(1) [Click here](#) for a quote on Haeger® custom installation tooling.


SMTSOB™ Nuts and Standoffs

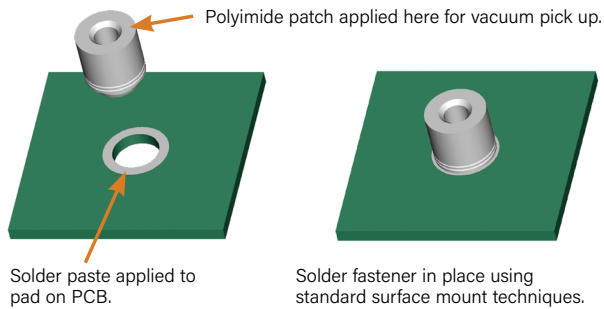

HFHB™ Studs

1. Prepare properly sized mounting hole in sheet. Do not perform any secondary operations such as deburring.
2. Insert stud through mounting hole (punch side) of sheet and into anvil hole.
3. With punch and anvil surfaces parallel, apply squeezing force on the punch sufficient only to embed the ribs on the head of the stud into the sheet. The standard punch design provides clearance for the stud head and reduces chances of over squeezing.

.035" - .036" (032)
 .045" - .046" (0420)
 .063" - .064" (0518)
 .077" - .078" (0616)
 0.94 mm - 0.96 mm (M5)
 1.14 mm - 1.16 mm (M6)
 1.62 mm - 1.64 mm (M8)
 2.1 mm - 2.12 mm (M10)

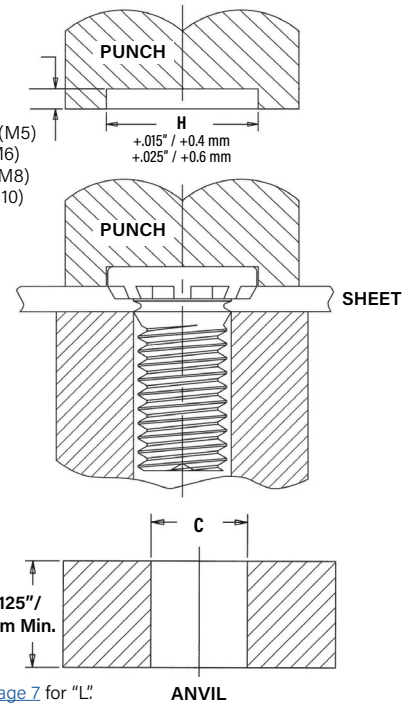

Installation Tooling

Unified	Thread Code	Anvil Dimensions (in.)	HAEGER® Part Number		PEMSERTER® Part Number	
		C	Anvil	Punch	Anvil	Punch
	032	.191 - .194	H-103-10L	H-184-10L	970200009300	970200311400
	0420	.250 - .253	H-103-04L	H-184-04L	970200010300	970200312400
	0518	.3125 - .3155	H-103-05L	H-184-05L	970200011300	970200313400
	0616	.375 - .378	H-103-06L	H-184-06L	970200004300	970200314400


Metric	Thread Code	Anvil Dimensions (mm)	HAEGER® Part Number		PEMSERTER® Part Number	
		C + 0.08	Anvil	Punch	Anvil	Punch
	M5	5.03	H-103-M5L	H-184-10L	970200020300	970200311400
	M6	6.03	H-103-M6L	H-184-04L	970200230300	970200312400
	M8	8.03	H-103-M8L	H-184-05L	970200231300	970200313400
	M10	10.03	H-103-M10L	H-184-06L	970200402300	970200491400

SOAG™ Standoffs

1. Prepare properly sized mounting hole in sheet. Do not perform any secondary operations such as deburring.
2. Insert fastener through mounting hole (preferably the punch side) and into anvil as shown in drawing.
3. With installation punch and anvil surfaces parallel, apply only enough squeezing force to embed the standoff's head flush in the sheet.

PEMSERTER® Installation Tooling

Thread Code	HAEGER® Part Number		PEMSERTER® Part Number	
	Anvil	Punch	Anvil	Punch
440/M3	H-109-4/M3L	H-108-0020L	970200487300	975200048
6440/3.5M3	H-109-6/M3.5L	H-108-0020L	970200012300	975200048
8632	H-109-8-10/M5L	H-108-0020L	970200013300	975200048

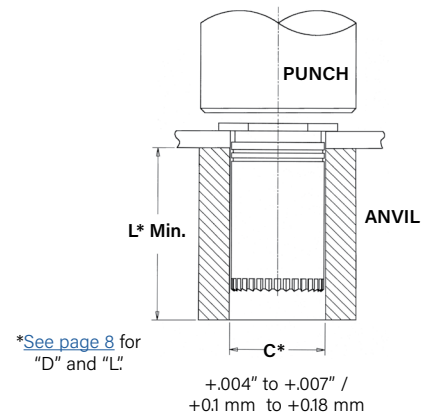

Installation Notes


- For best results we recommend using a HAEGER® or PEMSERTER® machine for installation of PEM® self-clinching fasteners. See our [website](#) for more information.
- Visit the [Animation Library](#) on our website to view the installation process.

For Additional HAEGER® and PEMSERTER® Tooling Information / Part Numbers




HAEGER® MANUAL TOOLING CATALOG

HAEGER® AUTO TOOLING CATALOG

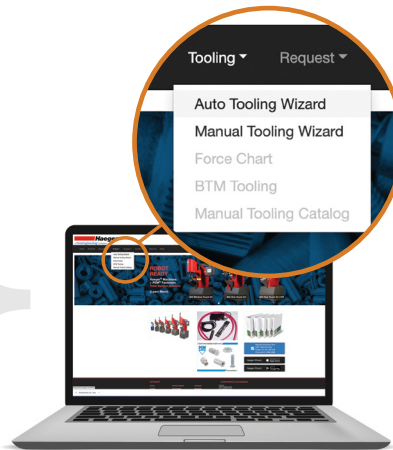

Go to haeger.com to access the Auto and Manual Tooling Wizards



Or download the HAEGER WIZZARD Phone App

OneTouch 4e XYZ-R
Tooling Wizard
BTM Tooling



PEMSALTER® MANUAL TOOLING CATALOG

PEMSALTER® AUTO TOOLING CATALOG

Performance Data⁽¹⁾

PEM eConnect™ Pins

Type	Test Sheet Material							
	C110 Copper HRB 44				FR-4 Fiberglass			
	Installation		Pushout		Installation		Pushout	
	(lbs.)	(kN)	(lbs.)	(kN)	(lbs.)	(kN)	(lbs.)	(N)
EPCRB	5845	26	900	4	—	—	—	—
EPFRB	—	—	—	—	1710	7.6	169	750

KFH™ Studs and KFB3 Nuts and Standoffs

Unified	Type	Thread Code	Max. Nut Tightening Torque (in. lbs.)	Test Sheet Material			
				.060" FR-4 Panel			
				Installation (lbs.)	Pushout ⁽²⁾ (lbs.)	Torque-out (in. lbs.)	Rated Current Amps ⁽³⁾
	KFH	440	4	400	65	7	14
		632	8	400	70	11	19
		832	15	400	80	16	24
		032	18	400	90	17	30
	KFB3	440	4	1000	140	18	42
		632	8	1500	170	28	88
		032	15	1600	180	30	100
		0420	18	1700	188	42	150

Metric	Type	Thread Code	Max. Nut Tightening Torque (N-m)	Test Sheet Material			
				1.5mm FR-4 Panel			
				Installation (kN)	Pushout ⁽²⁾ (N)	Torque-out (N-m)	Rated Current Amps ⁽³⁾
	KFH	M3	0.45	1.8	285	0.79	15
		M4	1.6	1.8	355	1.8	23
		M5	2.1	1.8	400	1.92	32
	KFB3	M3	N/A	4.4	560	2.03	42
		M4	N/A	6	680	3.2	88
		M5	N/A	7.1	800	3.5	100
		M6	N/A	7.6	835	4.8	150

- (1) Published installation forces are for general reference. Actual set-up and confirmation of complete installation should be made by observing proper seating of fastener as described in the installation steps. Other performance values reported are averages when all proper installation parameters and procedures are followed. Variations in mounting hole size, sheet material, and installation procedure may affect performance. Performance testing this product in your application is recommended. We will be happy to provide technical assistance and/or samples for this purpose.
- (2) These are typical values for parts installed in drilled mounting holes. Punched mounting holes yield values approximately 15% less.
- (3) The maximum carrying current for each of the above fasteners is calculated based on a heat transfer coefficient of 20 W/m² °K and a maximum temperature rise of 15°C / 27°F above ambient.

SMTSOB™ Nuts and Standoffs

Type	Thread/ Thru-Hole Code	Test Sheet Material				Rated Current Amps ⁽¹⁾
		.062" Single Layer FR-4				
		Pushout		Torque-out		
		(lbs.)	(N)	(in. lbs.)	(N-m)	
SMTSOB	080	85.1	378.7	4.94	0.56	—
	256	56.5				40
	440	56.5				36
	632	93.5				55
	832	151.1				76
	116	—	—	—	—	37
	143	—	—	—	—	55
	M1	85.1	378.7	4.94	0.56	—
	M1.2	85.1	378.7	4.94	0.56	—
	M1.4	85.1	378.7	4.94	0.56	—
	M1.6	85.1	378.7	4.94	0.56	—
	M3	56.5	251	8.56	1	36
	M3.5	93.5	416	13.83	1.6	55
	M4	151.1	672	26.96	3	76
	3.1	—	—	—	—	36
	3.6	—	—	—	—	55
	4.2	—	—	—	—	75

SOAG™ Standoffs

Unified	Type	Thread Code	Test Sheet Material			
			.064" 5052-H34 Aluminum			
			Installation (lbs.)	Pushout (lbs.)	Torque-out ⁽²⁾ (in. lbs.)	Pull-Thru ⁽²⁾ (lbs.)
	SOAG	6440	1700	300	25	186
		8632	1700	400	45	248

Metric	Type	Thread Code	Test Sheet Material			
			1.6mm 5052-H34 Aluminum			
			Installation (kN)	Pushout (N)	Torque-out ⁽²⁾ (N-m)	Pull-Thru ⁽²⁾ (N)
	SOAG	3.5M3	76	1330	2.82	825

HFHB™ Studs


Unified	Type	Thread Code	Rec. Nut Tightening Torque (ft. lbs.) ⁽³⁾	Test Sheet Thickness and Material	Installation ⁽⁴⁾ (lbs.)	Pushout (lbs.)	Torque-out (ft. lbs.)	Tensile Strength (lbs.)
	HFHB	032	1.7	.061" Copper CDA-110 HRB 28	3400	150	2.9	1200
		0420	3.6	.061" Copper CDA-110 HRB 28	6000	380	5	1908
		0518	7	.126" Copper CDA-110 HRB 32	7500	500	11	3140
		0616	13	.126" Copper CDA-110 HRB 32	12000	560	18	4650

Metric	Type	Thread Code	Rec. Nut Tightening Torque (N-m) ⁽³⁾	Test Sheet Thickness and Material	Installation ⁽⁴⁾ (kN)	Pushout (N)	Torque-out (N-m)	Tensile Strength (kN)
	HFHB	M5	2.7	1.5mm Copper CDA-110 HRB 28	15.6	1115	3.4	5.9
		M6	4.5	1.5mm Copper CDA-110 HRB 28	25.3	1600	6.7	8.3
		M8	11	3.2mm Copper CDA-110 HRB 32	33	2250	15.3	15.1
		M10	22	3.2mm Copper CDA-110 HRB 32	53.3	2500	25	24


- (1) The maximum carrying current for each of the above fasteners is calculated based on a heat transfer coefficient of 20 W/m² °K and a maximum temperature rise of 15°C / 27°F above ambient.
- (2) Joint failure in torque-out and pull-thru will depend on the strength and type of screw being used. In some cases the failure will be in the screw and not in the self-clinching standoff. Please contact our Applications Engineering group with any questions.
- (3) Tightening torque shown is a theoretical value calculated to induce a load of 75% of minimum axial yield strength of the stud with an assumed K value or nut factor equal to 0.20. In some applications tightening torque may need to be adjusted based on the actual K value.
- (4) Installation controlled by proper cavity depth in punch.

Derating Curves


EPCRB™ Self Clinching Pin

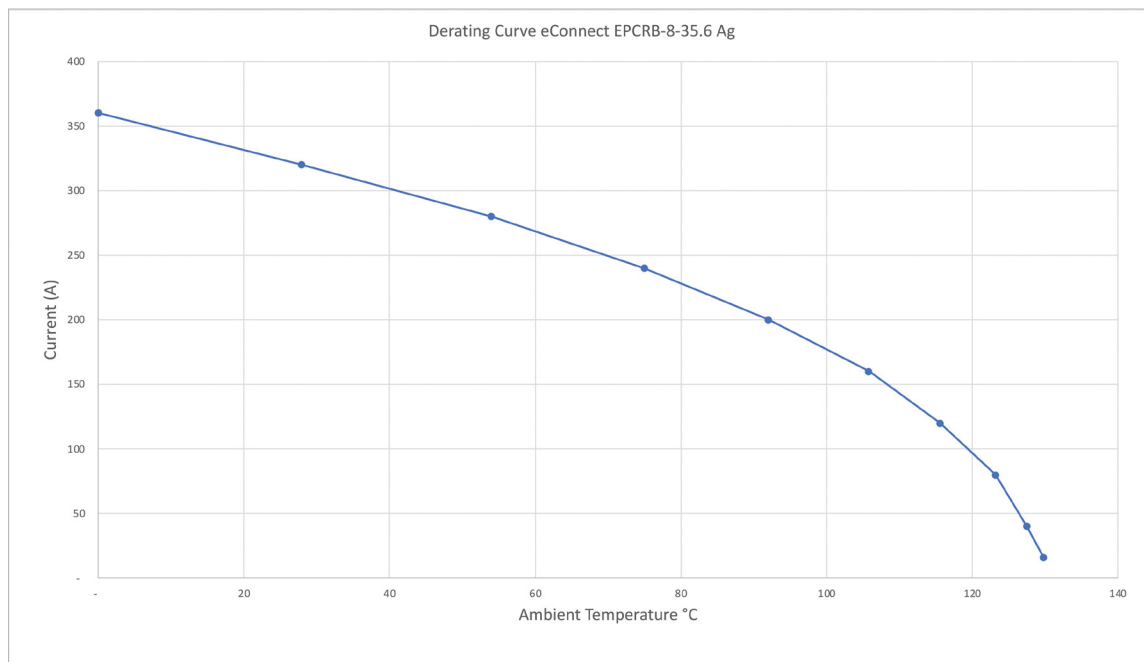

EPFRB™ Broaching Pin

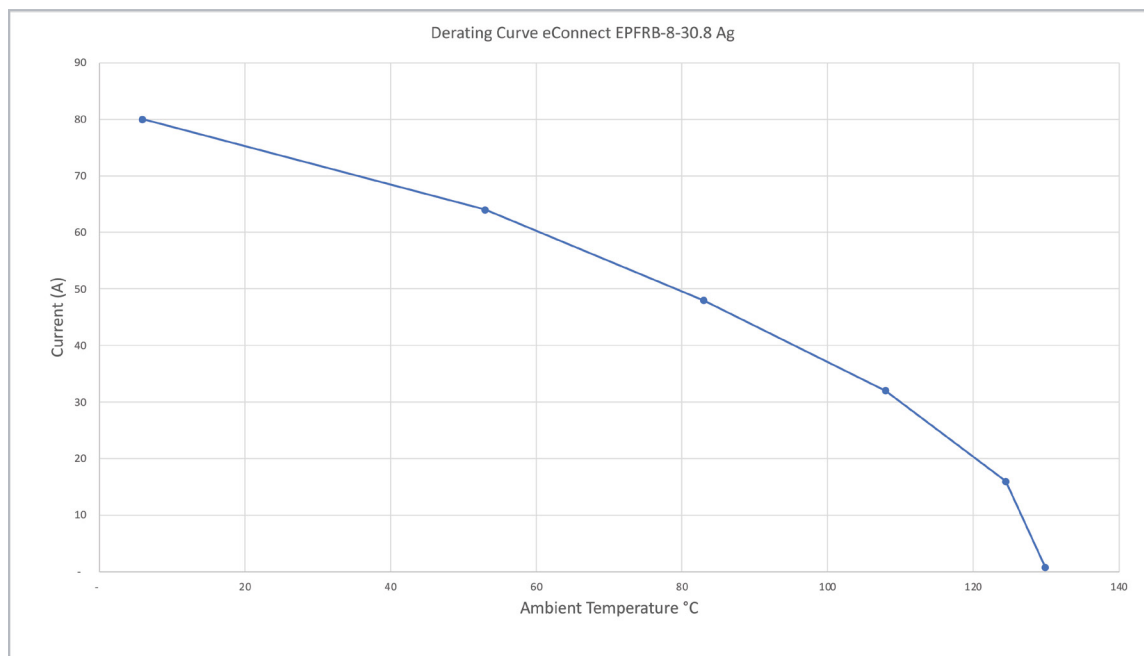

ECCB™ Contact Bushing

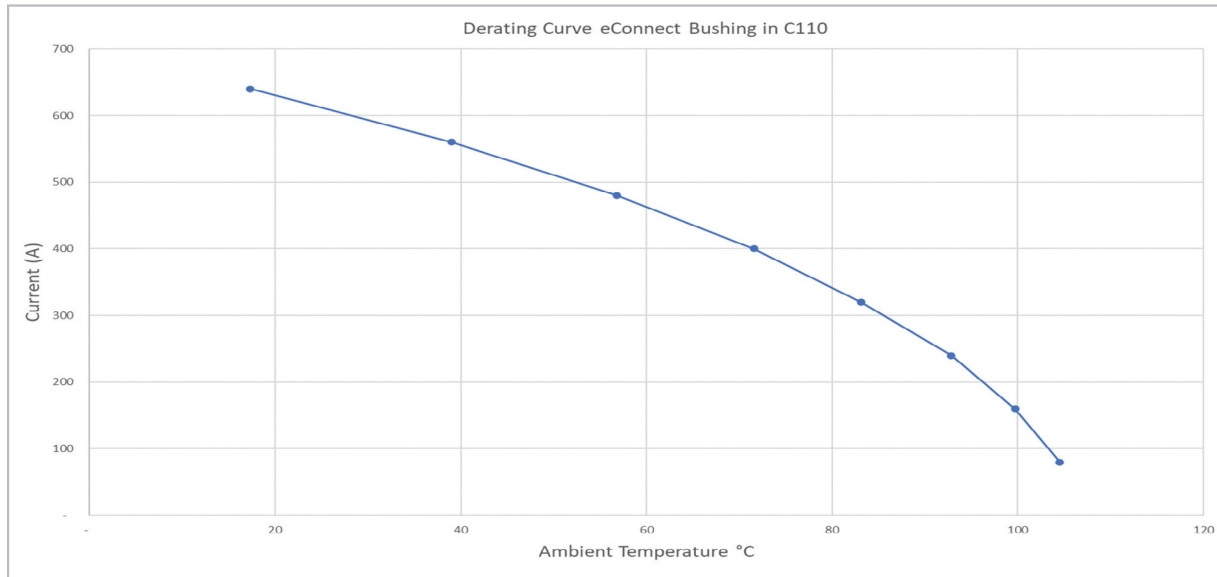

All PEM® products meet our stringent quality standards. If you require additional industry or other specific [quality certifications](#), special procedures and/or part numbers are required. Please contact your local sales office or representative for further information.

Regulatory [compliance information](#) is available in Technical Support section of our website. Specifications subject to change without notice. See our website for the most current version of this bulletin.



North America: Danboro, Pennsylvania USA | E-mail: info@pemnet.com | Tel: +1-215-766-8853 | 800-237-4736 (USA)
Europe: Galway, Ireland | E-mail: europa@pemnet.com | Tel: +353-91-751714
Asia/Pacific: Singapore | E-mail: singapore@pemnet.com | Tel: +65-6-745-0660
Shanghai, China: E-mail: china@pemnet.com | Tel: +86-21-5868-3688
 Visit our PEMNET™ Resource Center at www.pemnet.com • Technical support e-mail: techsupport@pemnet.com