

SPLIT TYPE HUB
ALUMINUM
ZERO BACKLASH


PHONE: 516.328.3300 • FAX: 516.326.8827 • WWW.SDP-SI.COM

► **MATERIAL:**
7075-T6 Aluminum

► **MISALIGNMENT COMPENSATION:**
Max. Angular Offset: 5°
Max. Lateral Offset: 0.25
Max. Axial Motion: ± 0.25

► **FEATURES:**
One-Piece Construction
Integral Clamp
Shaft Relief
High Fatigue Resistance
Constant Velocity
Adapts to High- and Low-Speed Applications

Bore diameter combinations are available on special order.

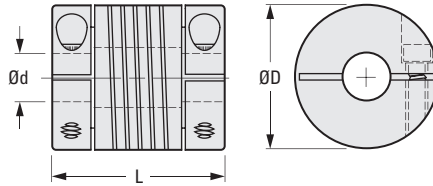

The projections shown are per ISO convention.

METRIC COMPONENT

Catalog Number	d Bore +0.05 0	D O.D.	L Length ± 0.25	Screw Size	Momentary* Dynamic Torque N • m	Torsional Flexibility Arc Min./ N • m	Inertia Δ $\times 10^{-4}$ kg cm sec. ²
S50HAWM15H0303	3	15	22	M2	0.71	306	0.028
S50HAWM15H0404	4	15	22	M2	0.66	432	0.028
S50HAWM15H0505	5	15	22	M2	0.59	600	0.028
S50HAWM20H0404	4	20	28	M3	1.3	162	0.11
S50HAWM20H0505	5	20	28	M3	1.2	210	0.11
S50HAWM20H0606	6	20	28	M3	1.1	270	0.11
S50HAWM25H0606	6	25	30	M3	2.9	90	0.3
S50HAWM25H0707	7	25	30	M3	2.8	108	0.3
S50HAWM25H0808	8	25	30	M3	2.6	132	0.3
S50HAWM25H0909	9	25	30	M3	2.4	168	0.3
S50HAWM25H1010	10	25	30	M3	2.2	210	0.3
S50HAWM30H0909	9	30	38	M4	4.9	66	0.78
S50HAWM30H1010	10	30	38	M4	4.6	78	0.78
S50HAWM30H1111	11	30	38	M4	4.3	96	0.78
S50HAWM30H1212	12	30	38	M4	4	114	0.78

* Torque listed is maximum momentary value.
For NONREVERSING applications, the torque rating is 1/2.
For REVERSING applications, the torque rating is 1/4.
 Δ Inertia is based on the smallest standard bore diameter.