

Type 0180 – with outside
opening crossbars

- Weight optimised plastic frame with high torsional rigidity.
- Openable at any position.
- **Outside:** openable.



Inner
heights




Inner
widths



Stay arrangement on each
chain link (**VS: fully-stayed**)



B_i 10 – 40 mm

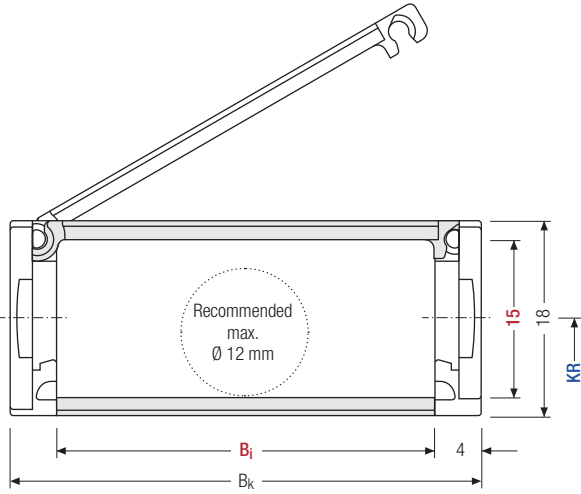

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable
carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L_k
rounded to pitch t

tsubaki-kabelschlepp.com/
mono

h_i [mm]	h_G [mm]	B_i [mm]				B_k [mm]	KR [mm]			q_k [kg/m]	
15	18	10	15	20	30	40	$B_i + 8$	28	37	50	0.169 – 0.252

Order example



MONO	0180	30	37	720	VS
Series	Type	B_i [mm]	KR [mm]	L_k [mm]	Stay arrangement