

DATA SHEET


P.O. Box 38-828 PETONE, Wellington Phone - (64-4) 9393 777 FAX - (64-4) 9393 778

Date - 20th May, 2000

e-mail = sales@casa.co.nz

Ref - CABLE-RK.FRP

Cable, Test Lead & Tool Storage Racks

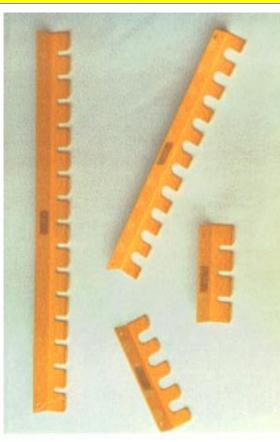

CASA's Storage Racks have been designed to provide tidy and efficient wall or bench mounted storage of studio, laboratory and workshop test leads, patch leads, and sundry hand tools used in the Electronics and Telecommunications Industries etc.

Special Features Include:

- 1) Up-turned front edge for retention of connectors and tool handles
- 2) Radiused lead-in profile to aid quick hanging of cables and tools etc.
- 3) Two slot widths to accommodate small leads and larger cables and tools etc.
- 4) Two Pitches to provide for small & larger diameter connectors or tool handles etc.
- 5) Ends of individual racks are arranged to provide end-on-end rows of racks
- 6) A range of standard lengths to cover most installations and basic requirements
- 7) Screw or Pop-Rivet fixing holes for mounting to walls and benches
- 8) Highly durable EPOXY powder coated finish
- 9) Customised lengths, materials and finishes available for volume orders

General Specification: (see typical drawings on reverse of this data sheet or request copies)

3 way, 4 way, 5 way, **Standard Sizes:** (way = number of usable slots) 8 way, 10 way, 12 way (exact overall length may be calculated from the formula below) Overall Length mm = $(p \times W) + (p-sw/2)$ 15 way 20 way where p = pitch in mm, W = ways, sw = slot width in mm **Cable Rack:** suitable for coaxial cables, test leads, patch cables etc. Slot width: 6 or 12 mm Pitch distance: 25 mm (depth of fold = 25 mm - from fixing surface) Tool Rack: suitable for screw drivers, nut drivers, files etc. Slot width: 6 or 12 mm Pitch distance: 35 mm (depth of fold = 37 mm - from fixing surface) 2 Holes 4.2 mm dia **Fixing Holes:** (See drawing) Yellow Epoxy PRII-107 Finish: (other colours available against volume orders) Material: (aluminum option to special volume order) 1.2 mm Mild Steel Weight: 20gms/way (typical) **Size:** (Length x Width x Thickness) see above or drawings

Part Number: CR or TR - xW - L or S - MS12Y(special adder/suffix)

Standard Packaging: (optional plastic tube)

Please compose a
Part Number
according to this
system and use on
your official order.

xW-L/S-MS12Y (-----

CR/TR- Prefix to indicate "CR" Cable Racks or "TR" Tool Racks

xW- x =Number ways or slots in the rack

L/S- "L" indicates Large 12 mm slots or "S" for Small 6 mm slots

MS12Y Mild Steel "YELLOW" epoxy finish

Special adder or suffix for custom design or finish etc. as appropriate



CASA File Ref.: DATA-SHT.FRP 10/11/92



Loose (wrapped)