


PHILIPS 55D HEATSINK EXTRUSION

Standard Lengths	Type No.	Finish
2"	55D2CB	Anodised
4"	55D4CB	Anodised -
6"	55D6CB	Anodised
8"	55D8CB	Anodised
36"	55D36C	Plain
72"	55D72C	Plain



50mm 50HS-55D With TO3 Plain or Anodized

Custom processing to order


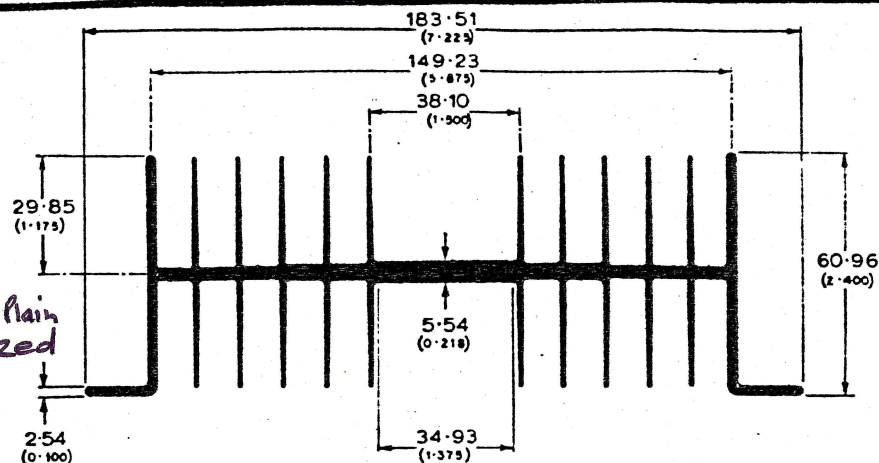


Dimensions in mm.
Inch conversions in brackets.

Scale 1:2

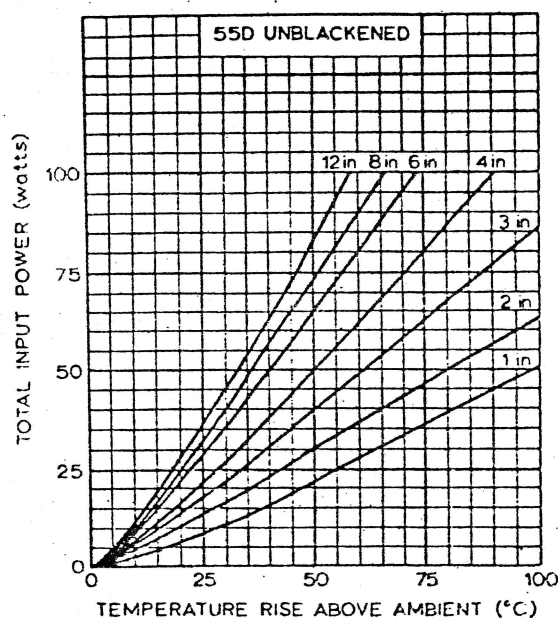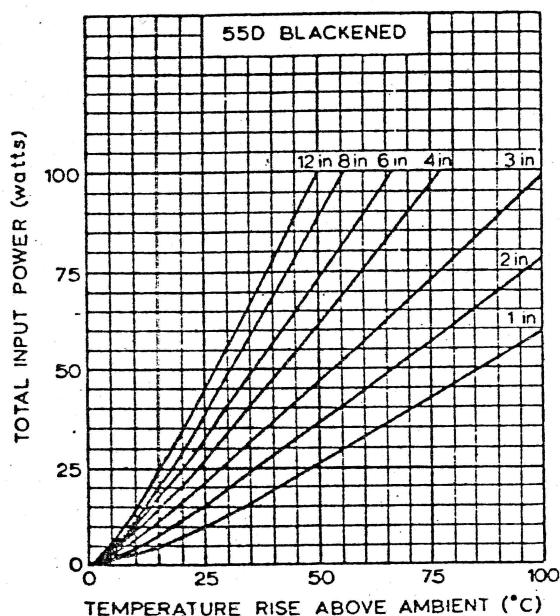

Total input power versus rise above ambient temperature for various lengths of extrusion with natural convection cooling.

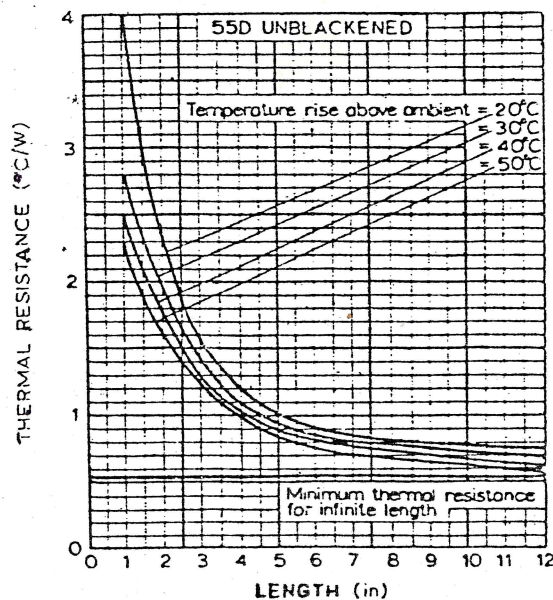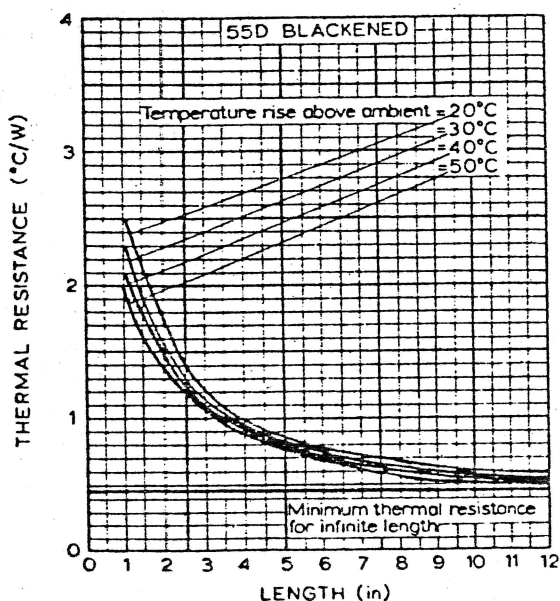

Thermal resistance versus extrusion length, for various rises above ambient temperature and with natural convection cooling.

Processed and distributed by:-

CASA modular systems ltd.

P.O. Box 30-028
Lower Hutt, New Zealand
Telephone 687-277, Wellington
FAX (04) 685 161 511