

MODEL:

# SR2POST25

## 25U SmartRack® Open Frame Rack



25 Rack Units



800 lb.  
Stationary  
Load Capacity




Standard 19-inch  
Rack Width



Toolless  
Mounting Slots




Integrated  
Baying Tabs



Square Hole  
Mounting

- A** Mounting Rails (2)
- B** Toolless Button Holes  
(for vertical PDUs or cable managers)

Also Includes: Owner's manual, installation hardware, rackmount equipment mounting hardware (28 screws, 28 washers) and cable management hooks.

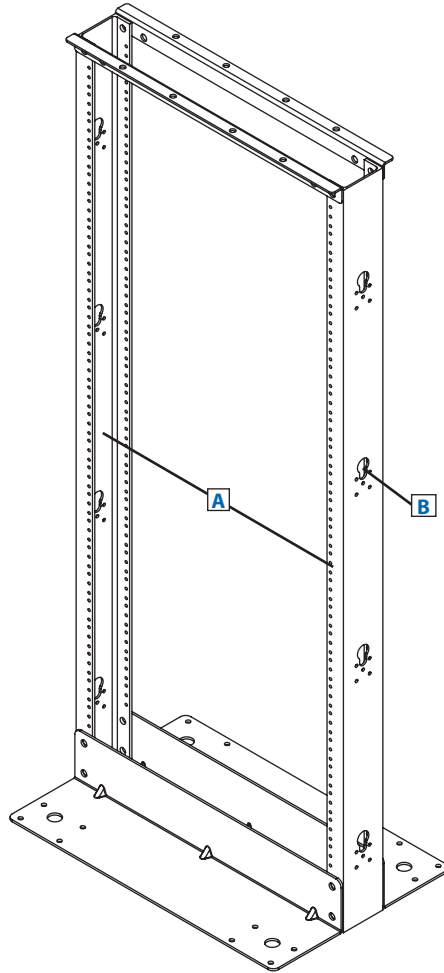

- Ships disassembled for easy transport and assembly in tight spaces
- Modular design optimized for quick configuration and reconfiguration
- Multiple units can be bolted together side by side
- Ideal for space-constrained or cost-conscious 19-inch rackmount applications

### Specifications

Model	SR2POST25
Rack Spaces	25U
Stationary Load Capacity	800 lb. (362.9 kg)
Unit Dimensions (H x W x D)	49 x 20.3 x 13.5 in. (1244.6 x 515.62 x 343 mm)
Shipping Dimensions (H x W x D)	4.5 x 6.5 x 52.4 in. (114 x 165 x 1331 mm)
Unit Weight	23 lb. (10.43 kg)
Shipping Weight	24 lb. (10.89 kg)
Regulatory Compliance	Meets EIA-310-D, NOM (Mexico), IEC 60297-3-100, and RoHS standards




Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.



SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS



1111 W. 35th Street  
Chicago, IL 60609 USA  
773.869.1234  
www.tripplite.com

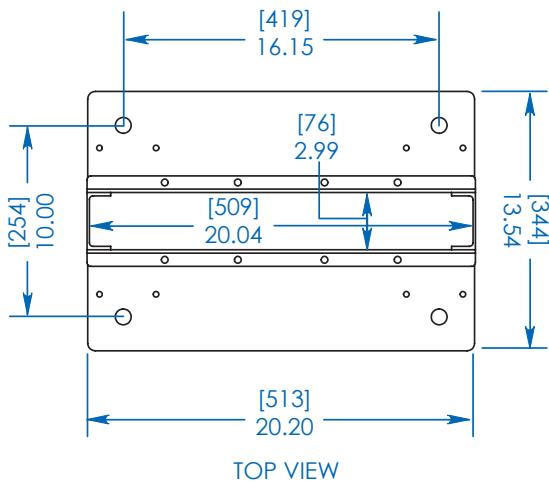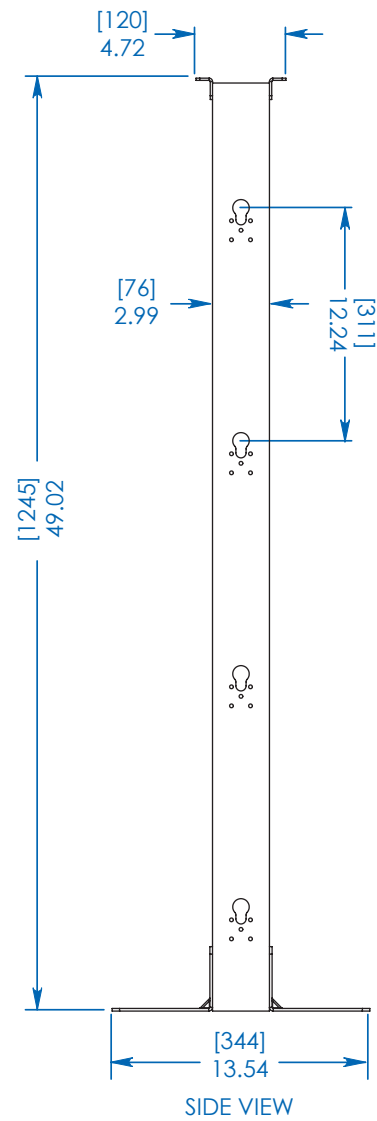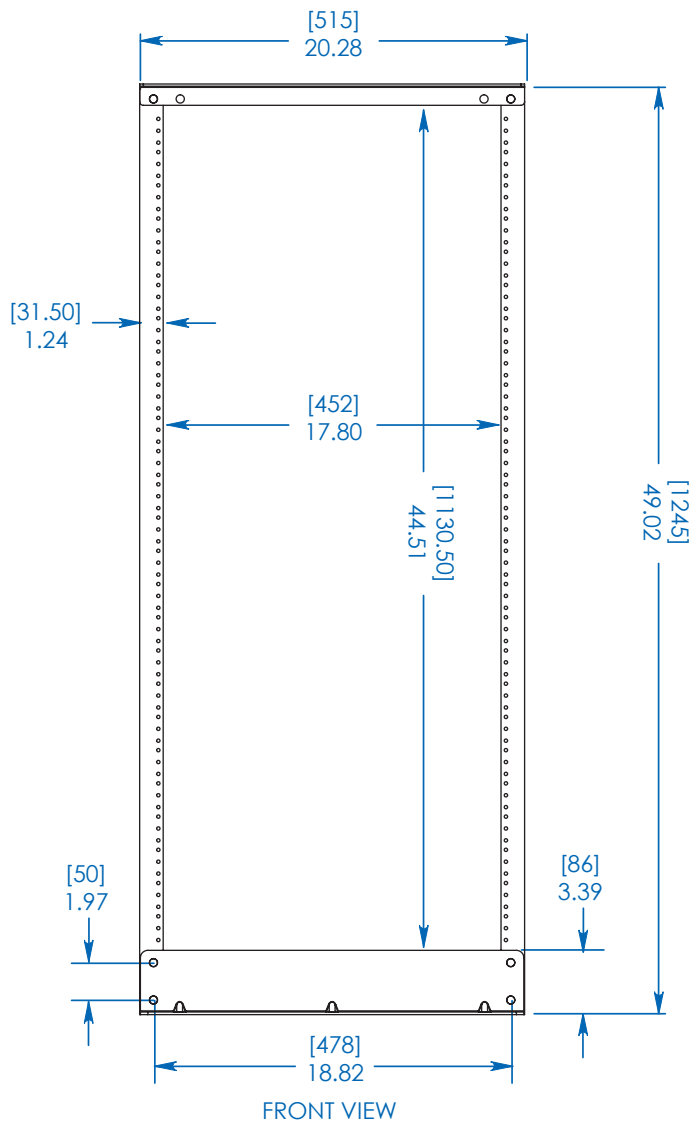

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:  
**SR2POST25**  
**TRIPP·LITE**

1111 W. 35th Street  
 Chicago, IL 60609 USA  
 773.869.1234

[www.tripp-lite.com](http://www.tripp-lite.com)